B GENERAL CONSTRUCTION NOTES

1. These drawings convey improvements to the exterior amenity areas of the project. All other aspects of the design including Civil Engineering and Architecture are by others. Any reference to the site or buildings shall be verified through the most current plans of the related consultants.

2. Any and all structural information supplied in these drawings not bearing the seal of the structural engineer is for pricing purposes only and subject to revision by the structural engineer.

3. In these drawings the written dimensions shall take precedence over the apparent dimensions derived by scale. The contractor shall verify and be responsible for all dimensions and conditions on the job. Sturch Design Group must be notified of any variation from the dimensions and conditions shown in these drawings.

4. Boundary, easement, setback, topography, drainage, utility and building shape and location information shown herein reflect the plan information provided by the Owner. This information is shown for reference only, and may be revised without the knowledge of Sturch Design Group.

5. The Contractor shall verify and stake out property lines, building setback lines and jurisdictional lines prior to construction and shall also review and observe the jurisdictional restrictions therein.

6. The Contractor shall maintain on site a copy of any approved site drawings. If required, tree barricades shall be installed per Pasco County requirements and maintained in place throughout construction. No construction or storage of materials shall occur within areas protected by tree barricades.

7. All design and construction shall comply with all applicable codes, including but not limited to, Florida Building Code, 2023 (8th edition) or latest edition, National Standards for Wood Construction, Design Codes and Guidelines, latest edition, ACI Design Guidelines for Reinforced Concrete, latest edition, ASTM Guidelines and Specifications, latest edition, Americans with Disabilities Act, latest edition.

8. The Contractor shall locate and protect existing structures and utility services and shall be responsible for their replacement if damaged by the Contractor. The Contractor shall call Sunshine State One-Call at least 48 hours prior to digging.

9. The Contractor shall be responsible for the clean up of premises and removal of all discarded and surplus materials and rubbish.

10. Contractors shall coordinate with the General Contractor the locations and sizes for any conduits or sleeves to be installed prior to the installation of pavings.

A GENERAL NOTES

1. All General Conditions for protections, insurances, formal notices and other legal expectations required by the Owner of the Contractor shall be the responsibility of the Owner and/or General Contractor to communicate to the Contractor prior to bidding and/or the commencement of construction as appropriate.

2. The Owner shall disclose to the Contractor all known ownership and boundaries with respect to the project scope and secure written permission and any terms for the Contractor to access the project site.

3. The Owner and the Contractor shall each identify and provide contact information for one or more people as the "Contractor" and the "Owner's Representative" who shall be the point sources for the communications required for this work.

4. The Contractor shall secure any and all permitting required for this work.

5. The Contractor shall communicate to the Owner all schedules of activities plans for significant events that may affect the general public, community or its neighbors in order to make appropriate preparations.

6. Work performed shall comply with the Contract Documents and Specifications as well as all applicable local, state and federal codes, ordinances and regulations. All codes listed in the Contract Documents and Specifications shall be inclusive of all codes, regulations and requirements adopted by the State of Florida, including all Amendments.

7. All existing field conditions shall be reviewed by the bidders in advance of offering a bid. All areas, dimensions, boundaries, ownership, rights of way, easements, utilities, existing improvements and other significant aspects of the insured estate shall be the responsibility of the Contractor to verify.

8. If any part of this plan cannot be followed due to site conditions, the Contractor shall contact the Owner or Owner's Representative for instructions prior to commencing the work.

9. The Contractor shall contact local underground utility services for utility location and identification prior to commencing the work.


10. The Contractor shall perform excavation in the vicinity of underground utilities and existing trees with care and by hand, if necessary. The Contractor bears full responsibility for this work and any damages and project disruption. The damage shall be reported and repaired immediately and at no expense to the Owner.

11. These Contract Documents, including the plans, details, notes and specifications, comprise one document and are intended to communicate and guide the work. The scope of the work include the following items as found in these drawings including irrigation and planting.

12. The Contractor shall employ best practices in procurement, partnering, risk management, benchmarking, supply management, costing, and health and safety for the Contractor's workforce and the Owner and the Owner's constituents. These Contract Documents may be amended from time to time. These amendments extend to revised plans, field instructions, and other communications by the Owner or Owner's Representative. It is the responsibility of the Contractor to maintain a documented account of these amendments throughout the course of construction and to communicate them to field personnel.

13. All quantities shown in these Contract Documents are the responsibility of the Contractor to verify. All discrepancies shall be reported to the Owner or the Owner's Representative as soon as they are discovered.

14. The Contractor shall review all plans and specifications and perform an analysis of site conditions relative information therein prior to construction. Report all discrepancies in site conditions and plans prior to commencing work. The Contractor shall be responsible for becoming familiar with all underground utilities, pipes, structures and line runs prior to construction.

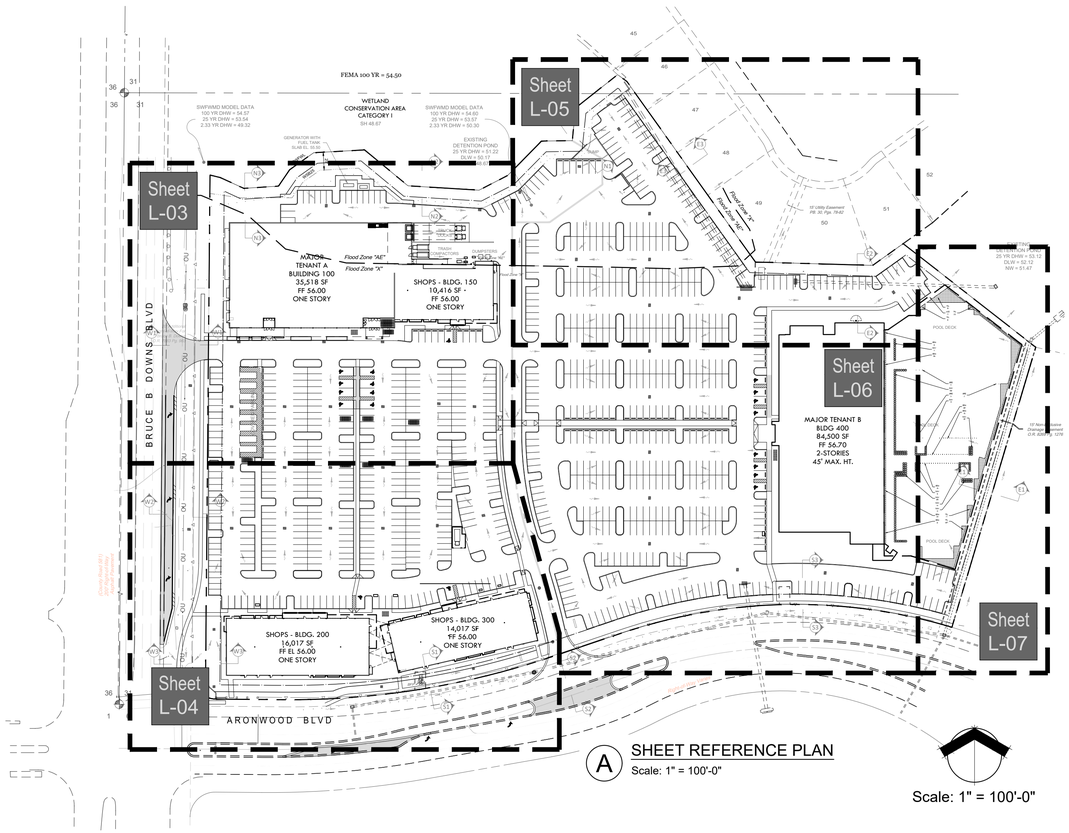

Landscape Plans for
Meadow Pointe Tract 2

Pasco County, Florida

Developer:
SJC Ventures
1115 Howell Mill Rd
Suite 777
Atlanta, GA 30318
(503) 809-9149

Civil Engineer:
Fuxan Engineering, Inc.
15018 Maurine Cove Lane
Odessa, FL 33556
(813) 244-6194

Landscape Architect:
Sturch Design Group, Inc.
George T. Sturch, Jr.
11411 Cypress Park Street
Tampa, FL 33624
(813) 610-4525

BIDDER INSTRUCTIONS

1. All bids shall include all costs of design, engineering, shop drawings, permitting, constructing, and outfitting the work as described in these documents.

2. Bidders shall review the plans and site prior to offering bids and report any discrepancies to the Owner and General Contractor. Unreported discrepancies will be the responsibility of the bidder.

3. Bidders shall bear the cost of permits and any specialized engineering plans.

4. Parts of these documents are conceptual in nature, reflecting the Owner's program within certain site constraints. Bidders shall review the design and notify the Owner of any design deficiencies. Bidders will be responsible for resolving any deficiencies not previously reported to the Owner.

5. Bidders shall include the costs of supplying cut sheets and samples of all Owner-selected decorative items such as lighting, coping, tile, paver, trench drains, fence, gate, pool shower, safety equipment, furnishings, finishes and equipment.

6. Bidders shall supply UNIT PRICING for plant species per each, sod and mulch per square foot, tree/palm staking and guying kit per each, and specified planting soil per cubic yard. Unit prices shall include all costs of material, labor, handling, and guarantees.

7. BUFFER ENHANCEMENT DEDUCT ALTERNATES 1 AND 2
Refer to Sheets L-10 and L-11 and supply pricing as specified.

8. BED PREPARATION ADD ALTERNATE 1
Refer to Sheet L-12 and supply pricing for the work as specified.

9. IRRIGATION DESIGN-BUILD
Successful bidder shall supply the plans, permitting, and installation for the irrigation system as specified in the notes on Sheet L-02 of these plans.

BUILDING CODES

All design and construction shall comply with all applicable codes, including but not limited to, Florida Building Code, 2023, (8th Edition) or latest edition, National Standards for Wood Construction, Design Codes and Guidelines, latest edition, ACI Design Guidelines for Reinforced Concrete, latest edition, ASTM Guidelines and Specifications, latest edition, Americans with Disabilities Act, latest edition.

SHEET INDEX

L-01 Landscape Notes
L-02 Plant Schedule
L-03 Landscape Plan
L-04 Landscape Plan
L-05 Landscape Plan
L-06 Landscape Plan
L-07 Landscape Plan
L-08 Landscape Details
L-09 Landscape Specifications
L-10 Buffer Enhancement
L-11 Buffer Enhancement
L-12 Bed Preparation Plan

Always call 811 two full business days before you dig
Sunshine811.com

SUNSHINE NOTE:

THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION IN AREAS OF BURIED UTILITIES AND SHALL CALL "SUNSHINE" AT 811, AT LEAST TWO BUSINESS DAYS PRIOR TO CONSTRUCTION, TO ARRANGE FOR FIELD LOCATIONS OF BURIED UTILITIES.

STURCH DESIGN GROUP
Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT GEORGE T. STURCH, JR. 1295 STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

George T Sturch
Digitally signed by George T Sturch
Date: 2025.02.10 09:17:02 -05'00'

SHEET TITLE:

COVER

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

COVER

COPYRIGHT ® These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically revoke SDG's liabilities to any and all liability claims, costs or litigation by any interested parties in the project.

FILE:

PLOTTED:

LOGIN:

Pasco County Landscape Code Calculations

Pond Buffer Calculations

NOTE: There are no ponds within the boundaries of this project.

Drought Tolerant Species Calculations

NOTE: Overall Site may have a maximum of 50% plant material other than trees to be non-drought tolerant

	Total
Total of Shrub and Ground Cover Plants:	5,690
Total of Non-Drought Tolerant Species:	5,690

0 / 5,495 = 0% Non-Drought Tolerant (or 100% Drought Tolerant)

Native Shrub & Groundcover Requirement

NOTE: Overall site, at least 30% of shrubs and groundcovers shall be of a Native Species. (See Plant List on Sheet L-02 for "Native" designation.)

		Total
Total of Shrub and Ground Cover Plants:		9,229
Total of Native Species:		2,961
Total Native Percentage:	2,961 / 9,229 =	32.0%

25% Maximum Species Quantity

NOTE: No one plant species (not including trees or palms) may exceed 25% of the total of plants.

	Total
Total of Shrub and Ground Cover Plants:	9,229
25% Maximum Limit of Species Quantity:	2,307
Maximum Plant Species Quantity in Plant List:	1,588

Palm Tree Calculations

Overall Site: Palms may be substituted for trees up to 30% at 3:1 (Palms to Trees).

NOTE: All palms used have a 1:1 shade tree substitution ratio.

Total Canopy Trees:		299
Total Palms / 1:	31 / 1 =	31
Total Tree Credits:		330
Palm Ratio to Total Tree Credits:	31 / 330 =	9.4%

Building Foundation Planting Requirement

BUILDING 100 & 150:
- 50% Perimeter Planting
  - Total Perimeter: (not incl. dock) 879.5 l.f.
  - 50% Req'd Planting: 439.75 l.f.
  - Perimeter Provided: 450.13 l.f.
  - Trees Required (1/50 l.f.) 439.75 / 50 = 9
  - Tree Provided: 9
- 10% of Building Area (Total of both buildings)
  - Total GF Building Area: 45,934 s.f.
  - 10% Req'd Planting: 4,594 s.f.
  - Landscape Area Provided: 4,954 s.f.

BUILDING 200:
- 50% Perimeter Planting
  - Total Perimeter: 570 l.f.
  - 50% Req'd Planting: 285 l.f.
  - Perimeter Provided: 286.66 l.f.
  - Trees Required (1/50 l.f.) 285 / 50 = 6
  - Tree Provided: 6
- 10% of Building Area
  - Total GF Building Area: 16,017 s.f.
  - 10% Req'd Planting: 1,602 s.f.
  - Landscape Area Provided: 1,606 s.f.

BUILDING 300:
- 50% Perimeter Planting
  - Total Perimeter: 540 l.f.
  - 50% Req'd Planting: 270 l.f.
  - Perimeter Provided: 301.47 l.f.
  - Trees Required (1/50 l.f.) 270 / 50 = 6
  - Tree Provided: 6
- 10% of Building Area
  - Total GF Building Area: 14,017 s.f.
  - 10% Req'd Planting: 1,402 s.f.
  - Landscape Area Provided: 2,372 s.f.

BUILDING 400:
- 50% Perimeter Planting
  - Total Perimeter: (not including egress) 875 l.f.
  - 50% Req'd Planting: 437.50 l.f.
  - Perimeter Provided: 484.39 l.f.
  - Trees Required (1/50 l.f.) 437.5 / 50 = 10
  - Tree Provided: 9
- 10% of Building Area
  - Total GF Building Area: 42,250 s.f.
  - 10% Req'd Planting: 4,225 s.f.
  - Landscape Area Provided: 5,390 s.f.

Vehicular Use Area Landscape Requirement

	Total
Total Vehicular Use Area:	364,823 s.f.
Internal Landscape Area Required (10%):	36,482 s.f
Internal Landscape Area Provided:	39,379 s.f.

(See this sheet for areas by island.)

Notes:
1. Landscaped areas on the parking area perimeter or in the internal islands must equal or exceed a minimum of ten (10) percent of the total paved surface area.
2. Each 8'x20' landscaped island shall provide a minimum of one (1) shade tree, shrubs, and ground cover.
3. Each 8'x40' landscaped island shall provide a minimum of two (2) shade trees, shrubs, and ground cover.

Vehicular Use Area Landscape Tree Requirement

Required Parking Area	36,482 s.f.
Trees Required (1/200 s.f.):	182 trees
Trees Provided:	185 trees


Notes:
1. Landscaped areas on the parking area perimeter or in the internal islands must equal or exceed a minimum of ten (10) percent of the total internal landscape area.
2. One (1) tree must be planted or retained per 200 s.f. of internal parking area.
3. No parking space may be more than 100 feet from a tree planted in a permeable island, peninsula, or median of an eight-foot minimum width.

Minimum Tree Species

Tree diversity shall be required based on the number of required trees on site (see Table 905.2-B).

This project requires 6 species.

Req. # of Trees	Req. # of Species
1-5	1
6-10	2
11-15	3
16-20	4
21-25	5
26-or more	6

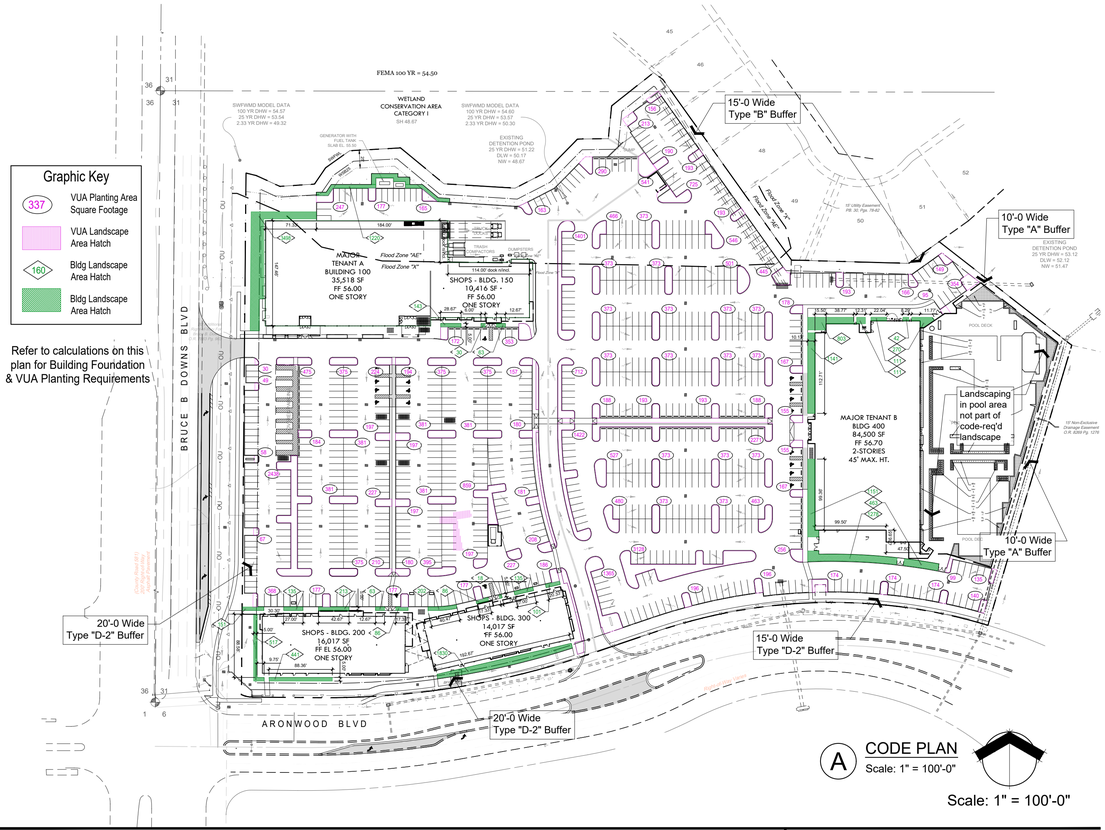

A CODE PLAN
Scale: 1" = 100'-0"


Scale: 1" = 100'-0"

Landscape Buffer Requirements


LOCATION	BUFFER TYPE	DESCRIPTION
North	Type "B" 15'-0" wide	Trees: 1 / 30 LF. Hedge: Single row of evergreen shrubs. Screen: 6' (min.) to 8' (max.) height opaque fence (no wood or chain link), wall, berm, or hedge plantings (1/5 l.f.)
West	Type "D-2" Width Varies	Trees: 1 / 30 LF. Hedge: Double row of staggered evergreen shrubs 3' tall at planting OR Combination of a berm and single row of evergreen shrubs, 3' tall at installation Screen: None
South	Type "D-2" Width Varies	Trees: 1 / 30 LF. Hedge: Double row of staggered evergreen shrubs 3' tall at planting OR Combination of a berm and single row of evergreen shrubs, 3' tall at installation Screen: None
East	Type "A" 10'-0" wide	Trees: 1 / 60 LF. Hedge: Single row of evergreen shrubs. Screen: None

Pasco County Landscaping Standard Notes (Pasco LDC 905.2)


1. Where a driveway/accessway intersects a road right-of-way or where two (2) road rights-of-way intersect, vegetation, structures, and non-vegetative visual screens shall not be located so as to interfere with the clear sight triangle as defined in this Code or the *Florida Department of Transportation, Manual of Uniform Minimum Standards*, most recent edition (Green Book), whichever is more restrictive. *(LDC 905.2.C.1.b)*
2. Landscaping shall be installed so that landscaping materials meet the concept of right material/right place. Installed trees and plants shall be grouped into zones according to water, soil, climate, and light requirements. Plant groupings based on water requirements are drought tolerant, natural, and oasis. *(LDC 905.2.C.1.c)*
3. All plant materials shall be Florida No. 1 grade per "Grades and Standards for Nursery Plants," Florida Department of Agriculture and Consumer Services (FDACS), which is incorporated herein by reference. *(LDC 905.2.C.2.a)*
4. Groundcover plants shall be spaced to present a finished appearance and obtain a reasonably complete coverage within one (1) year. Non-living ground cover, such as mulch, gravel, rocks, etc., shall be used in conjunction with living plants so to cover exposed soil and suppress fugitive dust. *(LDC 905.2.C.2.g)*
5. All trees shall be planted according to the Florida Chapter, International Society of Arboriculture Standards for Planting, which is incorporated herein by reference. All trees must be maintained in good condition and planted in locations with adequate open space to allow for mature tree-canopy development. *(LDC 905.2.C.3.b)*
6. Trees shall not be planted within any easement so as to interfere with the use of that easement, nor under any present or planned overhead utility, nor in any rights-of-way without County approval through the associated review process. *(LDC 905.2.C.3.c)*
7. Mulch shall be used in conjunction with living plant materials so as to cover exposed soil. Mulch shall be installed to a minimum depth of three (3) inches. The mulch should not be placed directly against the plant stem or tree trunk. Mulch shall not be required for annual beds. Stone or gravel may be used to cover a maximum of 20 percent of the landscaped area. *(LDC 905.2.C.3.d)*
8. All landscaping shall be installed in accordance with standards and practices of the Florida Nursery, Growers, and Landscape Association and the Florida Chapter of the International Society of Arboriculture. *(LDC 905.2.C.3.e)*
9. All height requirements shall be based on the finished grade of the landscaped area and measured at the main stem. *(LDC 905.2.C.3.f)*
10. All portions of a lot upon which development has commenced, but not continued for a period of 30 days, shall be planted with a grass species or ground cover to prevent erosion and encourage soil stabilization. Adequate coverage, so as to suppress fugitive dust, shall be achieved within 45 days. *(LDC 905.2.C.3.g)*
11. All portions of each site, which are not devoted to buildings, sidewalks, paving, or special landscape features shall be grassed. However, no more than thirty (30) percent of the required landscape area may be grassed; the balance shall be landscaped in shrubs and ground cover plants. *(LDC 905.2.D.1.a)*
12. All required landscaping shall be maintained in a healthy condition in perpetuity in accordance with this Code. *(LDC 905.2.E.2)*
13. Ongoing maintenance to prevent the establishment of prohibited exotic species is required. *(LDC 905.2.E.4)*

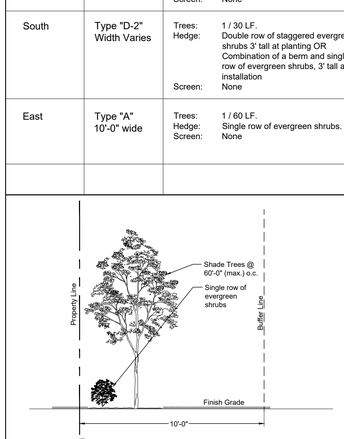


C Type "A" Buffer 10'-0" Wide
Not To Scale

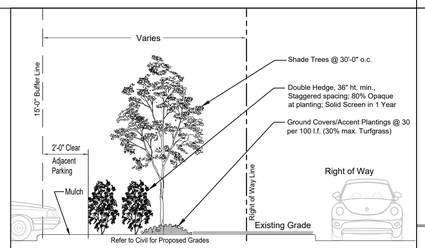

E Type "D-2" Buffer 15' & 20' Wide
Not To Scale

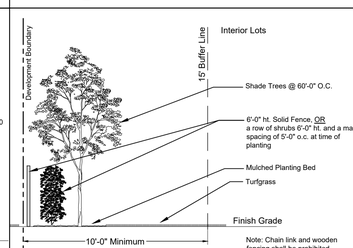

D Type "B" Buffer 15'-0" Wide
Not To Scale

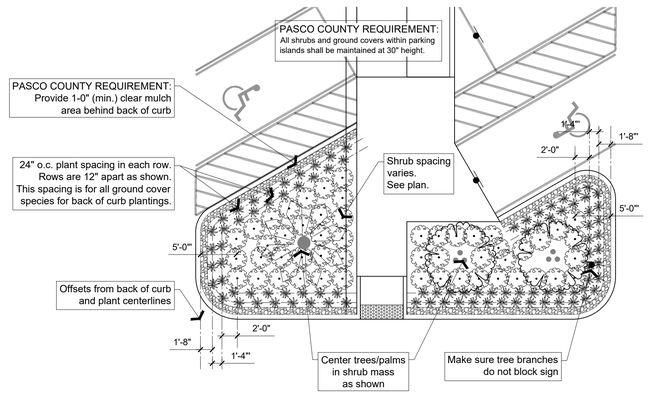

B PARKING ISLAND LAYOUT
Scale: 1" = 10'-0"

SHEET INDEX

L-01 Landscape Notes
L-02 Plant Schedule
L-03 Landscape Plan
L-04 Landscape Plan
L-05 Landscape Plan
L-06 Landscape Plan
L-07 Landscape Plan
L-08 Landscape Details
L-09 Landscape Specifications
L-10 Buffer Enhancement
L-11 Buffer Enhancement
L-12 Bed Preparation Plan

Always call 811 two full business days before you dig
Sunshine811.com

SUNSHINE NOTE:

THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION IN AREAS OF BURIED UTILITIES AND SHALL CALL "SUNSHINE" AT 811, AT LEAST TWO BUSINESS DAYS PRIOR TO CONSTRUCTION, TO ARRANGE FOR FIELD LOCATIONS OF BURIED UTILITIES.

STURCH DESIGN GROUP
Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT 1295 STATE OF FLORIDA GEORGE T. STURCH, JR.

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-01

COPYRIGHT ® These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing and other than SDG shall automatically revoke SDG's harmless to any and all liability claims, suits or litigation by any interested parties in the project.

FILE:

PLOTTED:

LOGIN:

D IRRIGATION DESIGN-BUILD NOTES

1. The Contractor shall secure all permits necessary for the work.
2. The Contractor shall provide the irrigation plans as designed by a Certified Irrigation Designer. The design shall be submitted to the Owner for review and approval at least four (4) weeks prior to installation.
3. The irrigation Contractor shall verify the available GPM and PSI prior to installation of the system prior to the system design.
4. Irrigation system design shall provide a critical analysis demonstrating proper system performance.
5. Do not willfully install the irrigation as shown on the drawings when it is obvious in the field that conditions exist that might not have been considered in the design process. For example: obstructions, grade differences, water levels dimensional differences, etc. Refer to the landscape plan to avoid conflicts with proposed trees or shrubs.
6. Piping may sometimes be indicated as being located in unlikely areas: i.e., under buildings, outside property lines, under pavement, in lakes or ditches, etc. This is done for graphic clarity only. Whenever possible, piping is to be installed in open, green areas.
7. Pipe sizes shall conform to those on the drawing. Substituting with smaller pipe sizes will not be permitted.
8. If required the Irrigation Contractor shall provide the necessary Right of Way use permits.
9. Mainline to be installed with a minimum of 24" depth of cover, lateral lines are to be installed with a minimum of 12" depth of cover.
10. Unless otherwise indicated all sleeves are to be PVC Sch 40 and at least two (2) nominal sizes larger than the pipe to be sleeved.
11. Wherever practical, install valves out of high traffic areas. all valves, flush valves and wire splices shall be installed in Rain Bird valve boxes as follows: Remote control valves in 12" standard rectangular box and wire splices in 10" round valve box.
12. All wire connections to be DBRY sealed wire connectors.
13. All grounding as per Hunter Industries recommended standards.
14. All pop up sprinkler heads shall be installed level and flush to grade. Mount all bubblers on 18" of flexible PVC.
15. The rain sensor shall be installed to meet local codes.
16. Main line piping larger than 2" shall have thrust blocks sized and placed in accordance with the manufacturer's recommendations. Thrust blocks shall be standard poured concrete mix. Thrust blocks shall be installed at all changes in directions, reducers, valves and end caps of main line.
17. The irrigation contractor shall prepare an AS-BUILT drawing on reproducible paper showing all main line piping, control wires and valves by showing exact measurements from hard surfaces.
18. The Owner will supply power to the irrigation controller. Coordinate the location of the Controller with the General Contractor prior to beginning installation.
19. Any other equipment required that is not otherwise detailed or specified shall be installed as per manufacturer's recommendations and specifications.
20. Velocity not to exceed 4.5' per second.

E TREE PROTECTION AND REMOVALS

1. All existing trees that are to remain shall be barricaded in accordance with Pasco County requirements.
2. Maintain a copy of the approved site construction drawings showing trees and palms to be saved and protected.

A PLANTING NOTES

1. Plant Material Standards. All plant material installed on this project shall be classified "Florida #1" or better as defined by the latest edition of "Grades and Standards for Nursery Plants" and "Grades and Standards for Nursery Plants, Part II, Palms and Trees" published by the State of Florida Department of Agriculture and Consumer Services. Refer to details for further quality specifications.
2. Planting Standards. All recommended trees and plant material shall be planted in accordance with the specifications described in the latest edition of the State of Florida Department of Agriculture and Consumer Service, Division of Forestry, "Tree Protection Manual for Builders and Developers" and "American Nurseryman Standards."
3. Utility Conflicts. Plantings shall be placed in such a manner as to avoid conflicts with aboveground, underground, existing and proposed utilities.
4. Sight Triangles. Plantings shall be placed in such a manner as to provide clear visibility for drivers of vehicles at the intersections of the driveways and rights of way, in accordance with the standards of the applicable jurisdiction.
5. Landscape Coverage. All areas of the site that are not covered by buildings, pavements, ponds or existing vegetation shall be covered with mulch, turf grass, ground covers, or shrubs. Repair any sod damaged in construction.
6. All quantities shown in these Contract Documents are the responsibility of the Contractor to verify. All discrepancies shall be reported to the Owner or the Owner's Representative as soon as they are discovered.
7. The Contractor shall review all landscape plans and specifications and perform an analysis of site conditions relative the plans and specifications prior to construction. Report all discrepancies in site conditions and plans prior to commencing work. The Contractor shall be responsible for becoming familiar with all underground utilities, pipes, structures and line runs prior to construction.
8. The Contractor shall be responsible for maintaining all plantings until final acceptance by the Owner. This maintenance includes keeping beds free of debris and weeds, all mechanical maintenance, fertilization, chemical treatments for disease or infestation, and watering.
9. The Contractor is responsible for verifying the plant material availability prior to construction. Notify the Owner or Owner's Representative of any problem securing the specified plant material as soon as it is discovered. Discrepancies of type, quality, or number of plants discovered during construction shall be the responsibility of the Contractor.
10. All edging shall be a trench 4" deep x 6" wide at the edge of beds not otherwise bordered with structure or hardscape. All trees to be staked and guyed as shown in the details unless otherwise noted.
11. All plant material shall be guaranteed for a period of one year from the date of final acceptance by the Owner.All planting beds and tree rings shall be covered with a 3" minimum depth of specified organic mulch material. Keep the mulch at least 2" away from the main stems and trunks of plants.

B SITE PREPARATION NOTES

1. All construction procedures shall meet the requirements of OSHA, all local, all state, and all federal agencies to protect personnel and property.
2. The Contractor shall be responsible for verifying right-of-way lines, parcel lines, easements and other necessary information required to provide proper setbacks for both visible and non-visible proposed hardscape elements.
3. The Contractor shall be responsible for protecting infrastructure, existing hardscape and existing softscape elements during construction. Damage to elements which occurs as the result of construction shall be the responsibility of the Contractor to repair and/or replace. The Contractor shall be responsible for locating all utilities and existing elements, both underground and above ground prior to commencement of work.

C PLANTING LAYOUT NOTES

1. Verify the locations of pertinent site improvements. If any part of this plan cannot be followed due to conflicts with existing site conditions, contact the Owner for resolution prior to commencing work.
2. Exact locations of plant materials shall be approved by the Owner in the field prior to installation. The Owner reserves the right to adjust plants in the field.
3. Verify the site conditions and plant counts prior to submitting a bid for this work. Quantities are provided as a basis for bidding but may not provide sufficient coverage in the field. Plant spacing as shown in the Plant List shall govern the ultimate number of plants. If large discrepancies are discovered, the Contractor shall notify the Owner immediately for resolution.
4. Contact the local underground utility services for utility location and identification prior to commencement of construction.
5. Perform excavation in the vicinity of underground utilities with care and if necessary, by hand. The Contractor bears full responsibility for this work and disruption or damage to utilities shall be repaired immediately at no expense to the Owner.
6. Follow the Written Specifications and Notes in the Contract Documents for bed preparation, plant pits, setting height and other planting operations. If conflicts arise contact the Owner immediately for resolution.
7. Chemical treatments and fertilizers shall be applied by licensed operators, and as may be limited by local, state, and federal codes.
8. Plant material shall match form and character within each species and size designated on the drawings, unless otherwise noted. Source plants of the same species from the same nurseries. Provide photographs of the actual plants to be installed to the Owner for approval prior to the beginning of construction operations.
9. Do not store plant material on the construction site except as otherwise agreed and coordinated with the General Contractor.
10. Trim and prune small broken branches. Any plant that is damaged or disfigured whether by accident or intent shall be replaced.
11. Hedge plants hedges and mass plantings shall be aligned and equally spaced in all directions at the spacings specified in the Contract Documents.
12. Finish grade of planter areas shall account for the depth of mulch specified.

PLANT SCHEDULE CODE (Code planting only. Re: Sheet L-07 for Pool Area Plant List)

SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	SIZE	CONTAINER	HT/SPR	NATIVE	DROUGHT TOL.	
ORNAMENTAL TREES									
	LIN	42	Lagerstroemia indica x fauriei 'Natchez' / Natchez Crape Myrtle	2" DBH (min.)	45 Gal.	9`-10` Ht., 5` Spr., 5` C.T., Standard	NO	YES	
	LIS	28	Lagerstroemia indica x fauriei 'Sioux' / Sioux Crape Myrtle	2" Cal. (min.)	45 Gal.	9'-10' Ht., 5'-6' Spr., MT	NO	YES	
	LJ	2	Ligustrum japonicum / Japanese Privet	3" total Cal. (min.), Multi-trunk	Field Grown	6` Ht. (Min.) X 4` Spr.,, Multi-trunk	NO	YES	
PALMS									
	LN	32	Livistona nitida / Nitida Palm	10"-12"	Balled and Burlapped	16'-18 OA Ht., 10' CT (min.)	NO	YES	
SHADE TREES									
	AB	9	Acer barbatum / Southern Sugar Maple	2" Cal. (min.)	Field Grown	10` Ht. (min.), 4` Spr., 4`-5` CT	YES	YES	
	BD	10	Betula nigra 'BNMTF' TM / Dura Heat River Birch	2" Cal. (min.)	Field Grown	10` Ht. (min.), 4` Spr., 4`-5` CT	YES	YES	
	PE	42	Pinus elliottii densa / Slash Pine	2" Cal. (min.)	45 Gal.	10` Ht. (min.), 4` Spr., 4`-5` CT	YES	YES	
	PE4	29	Pinus elliottii densa / Slash Pine	3.5"-4" Cal.	Field Grown	12`-13` Ht., 5` Spr., 5`-6` CT.	YES	YES	
	QV	10	Quercus virginiana / Southern Live Oak	2" Cal. (min.)	Field Grown	10` Ht. x 4` Spr., 4`-5` C.T.	YES	YES	
	QV6	14	Quercus virginiana / Southern Live Oak	6" Cal.	Field Grown	18`-20` Ht. x 10`-12` Spr., 6` CT	YES	YES	
	TD	54	Taxodium distichum / Bald Cypress	2" Cal. (min.)	Field Grown	10` Ht. (min.), 4` Spr., 4`-5` CT	YES	YES	
	UK	52	Ulmus alata `UAMTF` / Kalysta™ Winged Elm	2" Cal. (min.)	30 Gal. (min.)	10` Ht. x 4` Spr., 4`-5` C.T.	YES	YES	
	UF	11	Ulmus americana floridana / Florida Elm	3.5"-4" Cal.	Field Grown	14`-16` Ht., 6`-7` Spr., 6` C.T.	YES	YES	

SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	SIZE	HT/SPRD	NATIVE	SPACING	DROUGHT TOL.	
ACCENTS									
	CVM	24	Codiaeum variegatum 'Mammy' / Mammy Croton	7 Gal.	36"-42" Ht., 24" Spr., 3PPP, Staggered	NO	48"	YES	
	SRE	7	Strelitzia reginae / Orange Bird Of Paradise	15 Gal.	36" Ht., 36" Spr., 8 PPP, Specimen	NO			
BUFFER HEDGES									
	MFR	55	Myrcianthes fragrans / Simpson's Stopper	3 Gal.	18" Ht. (min.), 18" Spr., Full	YES	36" (max.)	YES	
	MCE	330	Myrica cerifera / Wax Myrtle	3 Gal.	20" Ht. (min.), 18" Spr. FTB	YES	48"	YES	
	PMA	93	Podocarpus macrophyllus / Yew Podocarpus	7 Gal.	48" Ht., 24" Spr., FTB	NO			
	VOB2	653	Viburnum obovatum / Walter's Viburnum	15 Gal.	36" Ht. (Min.), 24" Spr., FTB	YES	48"	YES	
	VOD	308	Viburnum odoratissimum / Sweet Viburnum	3 Gal.	18" Ht. (min.), 18" Spr., Full	NO	36" (max.)	YES	
DWARF SHRUBS									
	CLJ	94	Callistemon citrinus 'Little John' TM / 'Little John'	3 Gal.	14" Ht.,, 14" Spr.	NO			
	DGM	487	Duranta erecta 'Gold Mound' / Gold Mound Dewdrops	7 Gal.	24" Ht. x 24" Spr., FTB, Florida Fancy	NO	A.S.	YES	
	EBB	204	Evolvulus x 'USEVO1201' / Blue My Mind® Dwarf Morning Glory	3 Gal.	14" Ht.,, 14" Spr.	NO	24"	YES	
	IVO	235	Ilex vomitoria 'Schillings' / Schillings Yaupon Holly	7 Gal.	18" Ht. (min.), 18" Spr., Full	YES	30"	YES	
	SAT	261	Schefflera arboricola 'Trinette' / Trinette Variegated Schefflera	7 Gal.	30"-36" Ht., 24"-36" Spr., FTB	NO	36"	YES	
	VOM	93	Viburnum obovatum 'Mrs. Schiller's Delight' / Mrs. Schillers Delight Walter's Viburnum	3 Gal.	14" Ht., (min.), 14" Spr.	YES	36"	YES	
GRASSES									
	SBA	177	Spartina bakeri / Sand Cordgrass	3 Gal.	24" Ht. x 12" Spr.	YES	36"	YES	

SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	CONTAINER SIZE	HEIGHT/SPREAD	NATIVE	SPACING	FIELD	SPACING
SHRUB AREAS									
	EVO	613	Evolvulus x 'USEVO1201' / Blue My Mind® Dwarf Morning Glory	3 Gal.	12" Ht., 12" Spr., Full	NO			24" o.c.
	IXM	66	Ixora x 'Maui Red' / Maui Red Ixora	3 Gal.	18" Ht., 18" Spr.	NO			30" o.c.
	JCO	832	Juniperus conferta / Shore Juniper	3 Gal.	10" Ht., 12" Spr.	NO			30" o.c.
	MCA	1,391	Muhlenbergia capillaris / Pink Muhly Grass	3 Gal.	20" Ht., 20" Spr.	YES	36"	YES	36" o.c.
GROUND COVERS									
	LBB	623	Liriope muscari 'Big Blue' / Big Blue Lilyturf	1 Gal.	12" Ht. X 12" Spr.	NO	18"	LOW	18" o.c.
	TJA	1,044	Trachelospermum jasminoides / Chinese Star Jasmine	1 Gal.	5-7 Vines, 12" Long, Full in Pot	NO	20"	YES	20" o.c.
	TJV	1,588	Trachelospermum jasminoides 'Variegatum' / Variegated Star Jasmine	1 Gal.	5-7 Vines, 12" Long, Full in Pot	NO	20"	YES	20" o.c.
SOD/SEED									
	BAH	35,489	Paspalum notatum 'Argentine' / Argentine Bahiagrass	Sod	Solid; Stagger Joints				12" o.c.
	SAS	9,690	Stenotaphrum secundatum 'Floratam' / Floratam St. Augustine Grass	Sod	Solid; Stagger Joints	N/A		LOW	12" o.c.

Plant Schedule Notes:

1. QUANTITIES ARE PROVIDED AS A COURTESY AND SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO SUBMITTING A BID. DISCREPANCIES SHALL BE REPORTED TO THE GENERAL CONTRACTOR.
2. ALL PLANT MATERIAL AND WORKMANSHIP SHALL BE OF THE QUALITY STATED IN THE PLANS AND SPECIFICATIONS AND MAY BE REJECTED AT ANY TIME IF DEEMED NOT TO MEET THE REQUIREMENTS.
3. THE HEIGHT AND SPREAD LISTED IN THE PLANT SCHEDULE SHALL BE CONSIDERED TO BE MINIMUM ACCEPTABLE SIZES. THE CONTRACTOR SHALL UPSIZE THE POT AS NECESSARY TO ACHEIVE THE SPECIFIED PLANT DIMENSIONS.
4. ABBREVIATIONS: "CAL." IS CALIPER; "DBH" IS DIAMETER BREAST HEIGHT; "FTB" IS FULL TO BASE; "CONT." IS CONTAINER GROWN; "HT." IS HEIGHT; "SPR." IS SPREAD; "MIN." IS MINIMUM; "O.C." IS ON CENTER; "S.F." IS SQUARE FEET; "C.F." IS CUBIC FEET; "L.F." IS LINEAR FEET; "A.S." IS AS SHOWN;

COPYRIGHT ® These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing and other than SDG shall automatically revoke SDG's licenses to any and all liability claims, suits or litigation by any interested parties in the project.

FILE:

PLOTTED:

LOGIN:

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT GEORGE T. STURCH, JR. 1295 STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

PLANT SCHEDULE

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-02

Always call 811 two full business days before you dig
Sunshine811.com

SWFWL
25'
WSB25
RE: L-10 FOR EXISTING BUFFER VEGETATION
N3
N2
1'-0" Clr
ENTIRE BED
24" WIDE STRIP W/89 STONE 4" DEEP ON GEOTEXTILE FABRIC W/BENDABORD EDGING
89 STONE 4" DEEP ON GEOTEXTILE FABRIC
THIS SHEET ONLY
SIGN VIEW AREA
W1

20' Right-of-Way For County Road No. 581 O.R. 7996 Pg. 1076

20' Additional Right-of-Way For Bruce B. Downs O.R. 7883 Pg. 963

18' Perpetual Slope Easement O.R. 7867 Pg. 1144

BRUCE B DOWNS BLVD

MAJOR TENANT A
BUILDING 100
35,518 SF
FF 56.00
ONE STORY

SHOPS - BLDG. 150
10,416 SF
FF 56.00
ONE STORY

Flood Zone "AE"
Flood Zone "X"

MATCHLINE SHEET L-04
MATCHLINE SHEET L-05
MATCHLINE SHEET L-06

COPYRIGHT ® These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically revoke SDG's consent to any and all liability claims, cost, or litigation by any interested parties in the project.

FILE:
PLOTTED:
LOGIN:

STURCH DESIGN GROUP
Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:
MEADOW POINTE
TRACT 2

CLIENT:
SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

Scale: 1" = 20'-0"

SHEET TITLE:
LANDSCAPE NOTES

ISSUE DATE:
FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:
L-03

MATCHLINE SHEET L-03

MATCHLINE SHEET L-06

BRUCE B DOWNS BLVD

ARONWOOD BLVD

20' Right-of-Way For
County Road No. 581 O.R.
7996 Pg. 1076

SIGN VIEW AREA

THIS SHEET ONLY

89 STONE 4" DEEP ON GEOTEXTILE FABRIC

SHOPS - BLDG. 200
16,017 SF
FF EL 56.00
ONE STORY

SHOPS - BLDG. 300
14,017 SF
FF 56.00
ONE STORY

1'-0" Clr

TRAFFIC

These plans are the property of Sturch Design Group, Inc. (SDG), and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes to the drawing grey other than SDG shall automatically revoke SDG's licenses to any and all liability claims, suits or litigation by any interested parties in the project.

COPYRIGHT ®

FILE:

PLOTTED:

LOGIN:

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

Scale: 1" = 20'-0"

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025


REVISIONS:

SHEET NUMBER:

L-04

Always call 811 two full business days before you dig

Sunshine811.com

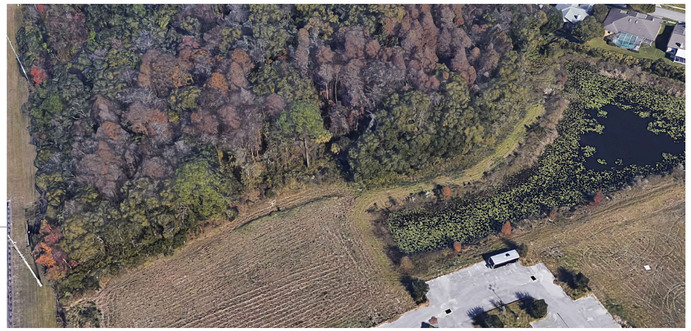

A North Buffer at Wetland
Not to Scale

46

47

48

49

50

51

52

RE: DETAIL "A" THIS SHEET FOR EXISTING BUFFER VEGETATION

RE: L-10 FOR DESCRIPTION OF BUFFER UPGRADES

RE: L-10 FOR SECTION OF PROPOSED BUFFER PLANTINGS

THIS SHEET ONLY

ENTIRE BED

Flood Zone "AE"

Flood Zone "X"

15' Utility Easement
PB. 30, Pgs. 78-82

Maintain Fire Apparatus clear of landscape obstructions

Landscaping in pool area not part of code-req'd landscape
RE: Plant List, Sheet L-07

MATCHLINE SHEET L-03

MATCHLINE SHEET L-07

MATCHLINE SHEET L-06

Always call 811 two full business days before you dig
Sunshine811.com

Scale: 1" = 20'-0"

These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically vendor SDG harmless to any and all liability claims, suits or litigation by any interested parties in the project.

COPYRIGHT ©

FILE:

PLOTTED:

LOGIN:

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-05

MATCHLINE SHEET L-05

MATCHLINE SHEET L-03

MATCHLINE SHEET L-04

MATCHLINE SHEET L-07"A"

MATCHLINE SHEET L-07"B"

THIS SHEET ONLY

MAJOR TENANT B
BLDG 400
84,500 SF
FF 56.70
2-STORIES
45' MAX. HT.

Landscaping in pool area not part of code-req'd landscape
RE: Plant List, Sheet L-07

RE: L-11 FOR DESCRIPTION OF BUFFER UPGRADES

SIGN VIEW AREA

ARONWOOD BLVD

Always call 811 two full business days before you dig
Sunshine811.com

These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes, to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes to the drawing after them SDG shall automatically revoke SDG's harmless to any and all liability claims, suits or litigations by any interested parties in the project.

COPYRIGHT ®

FILE:

PLOTTED:

LOGIN:

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
1295
STATE OF FLORIDA
GEORGE T. STURCH, JR.

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

Scale: 1" = 20'-0"

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-06


These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes to the drawing any other than SDG shall automatically revoke SDG's harmless to any and all liability claims, suits or litigation by any interested parties in the project.

COPYRIGHT ®


FILE:

PLOTTED:


LOGIN:

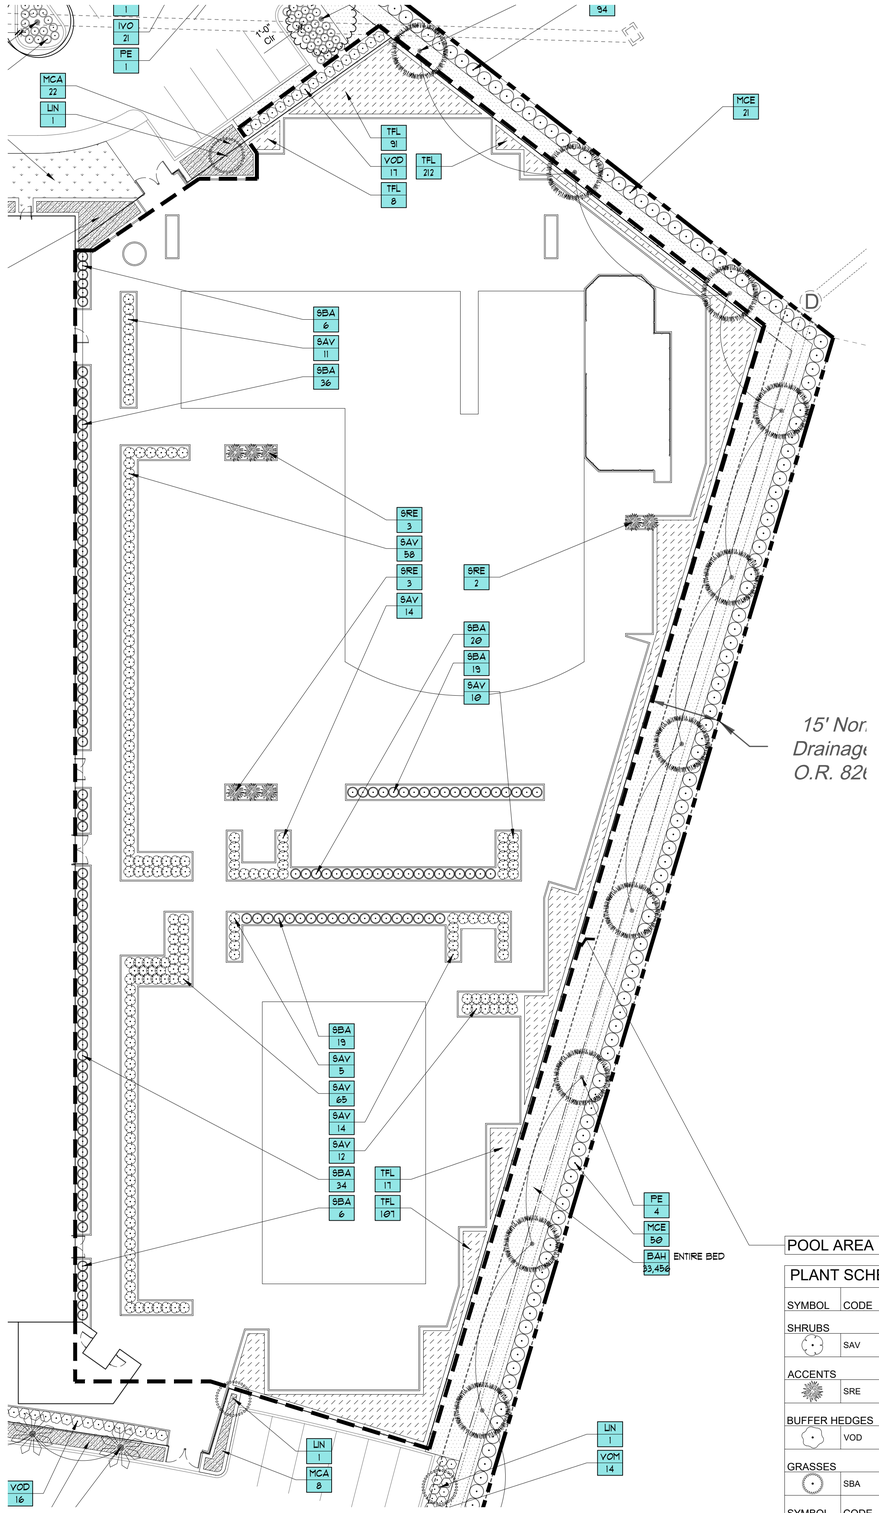

C POOL AREA PLANTING PLAN
Scale: 1" = 20'-0"

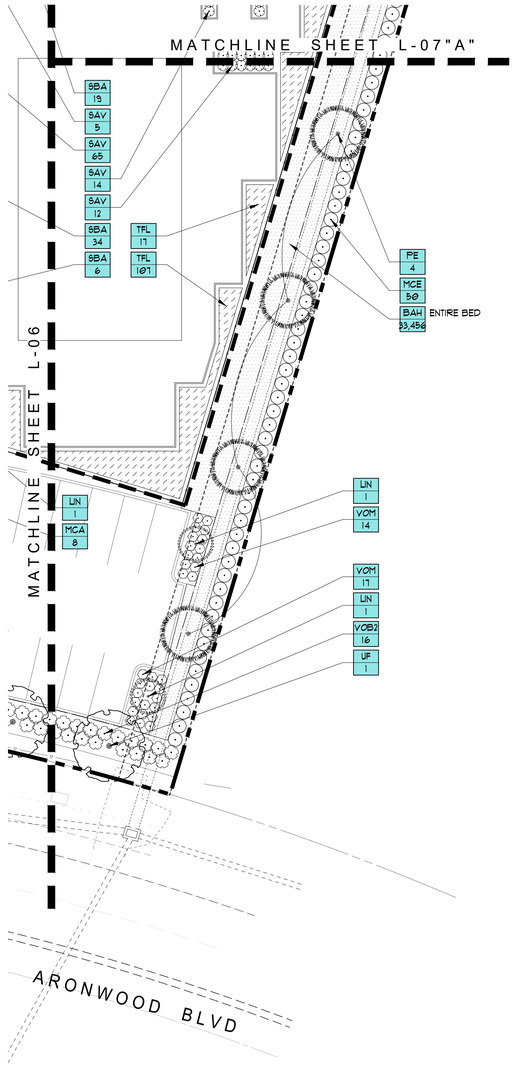

B PLANTING PLAN
Scale: 1" = 20'-0"

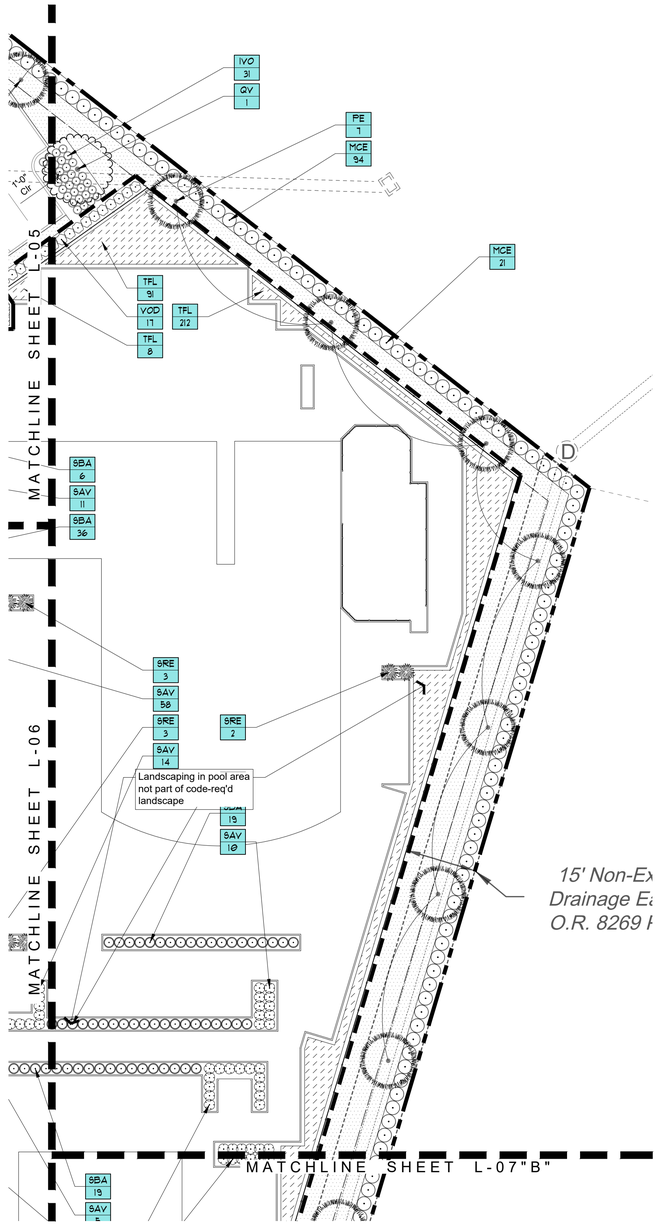

A PLANTING PLAN
Scale: 1" = 20'-0"

POOL AREA PLANT COUNTS WITHIN THIS AREA ONLY

PLANT SCHEDULE POOL AREA

SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	SIZE	HT/SPRD	NATIVE	SPACING	DROUGHT TOL.	
SHRUBS									
	SAV	189	Schefflera arboricola 'Variegata' / Dwarf Variegated Schefflera	7 Gal.	30"-36" Ht., 24"-36" Spr., FTB	NO	36"	YES	
ACCENTS									
	SRE	8	Strelitzia reginae / Orange Bird Of Paradise	15 Gal.	36" Ht., 36" Spr., 8 PPP, Specimen	NO			
BUFFER HEDGES									
	VOD	17	Viburnum odoratissimum / Sweet Viburnum	3 Gal.	18" Ht. (min.), 18" Spr., Full	NO	36" (max.)	YES	
GRASSES									
	SBA	144	Spartina bakeri / Sand Cordgrass	3 Gal.	24" Ht. x 12" Spr.	YES	36"	YES	
SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	CONTAINER SIZE	HEIGHT/SPREAD	NATIVE	SPACING	FIELD	SPACING
SHRUB AREAS									
	TFL	435	Tripsacum floridanum / Florida Gamagrass	3 Gal.	20" Ht., 20" Spr.	YES	30"	YES	30" o.c.
SYMBOL	CODE	QTY	BOTANICAL / COMMON NAME	CONTAINER SIZE	HEIGHT/SPREAD	NATIVE	SPACING	FIEL	SPACING
SOD/SEED									
	BAH	78	Paspalum notatum 'Argentine' / Argentine Bahiagrass	Sod	Solid; Stagger Joints				12" o.c.

Always call 811 two full business days before you dig
Sunshine811.com

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT GEORGE T. STURCH, JR. 1295 STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-07

Commercially Prepared Planting Soil Mix

1. The Planting Soil shall be “Installation Blend” by Reliable Peat in Groveland, Florida or equal.

2. Planting Soil shall consist of natural, friable, sandy loam, native topsoil. It shall be free from objects such as hard clods of clay or subsoil larger than 1.5 inches max. dimension. It shall also be free from noxious weed parts, grass, refuse, stumps, roots, brush, construction materials or other foreign matter, hazardous or toxic substances, and any material that may be harmful to plant growth, or that may hinder grading, planting, or maintenance of the proposed landscape. The soil shall be delivered in a normally moist condition, but not wet.

3. Planting Soil shall consist of Florida peat, pine bark compost, non-composted pine bark fines, and thoroughly mixed at a 1:1 ratio with washed sand.

4. Provide a testing report for the Planting Soil prior to delivering to the site. Testing shall be performed by the University of Florida Extension – Institute of Food and Agricultural Sciences (IFAS) Soil Testing Laboratory, or a local, certified commercial soil testing facility. The test reports shall be submitted to the Owner for review at least four (4) weeks prior to installation. Soil collection shall be as recommended by the testing laboratory. The test shall include current agronomic and full textural class analysis of the actual soil to be delivered to the site. the reports shall include the sample date and location.

5. The composition shall be in general accordance with ASTM D5268 subject to the following:

Texture Class	% of Total Weight	Average %
Sand (0.05-2.0mm dia. range)	25-75	50
Silt (0.002-0.05mm dia. range)	15-40	27.5
Clay (<0.002mm dia. range)	15-30	22.5


A. Chemical Attributes

pH range:	6.8-7.5
Organic matter:	1%-5%
Salinity range:	EC<2 mmhos/cm

B. Minimum Nutrients


Nitrogen (N):	5 ppm air dried basis
Phosphorous (P):	5 ppm
Potassium (K):	30 ppm
Iron (Fe):	5 ppm

J PLANTING SOIL MIX

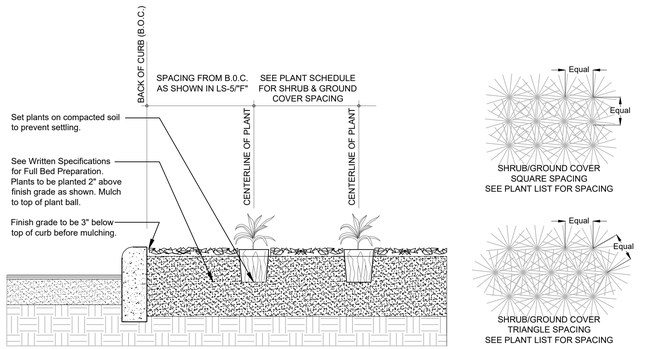


E TYPICAL FULL BED PREPARATION

Not To Scale

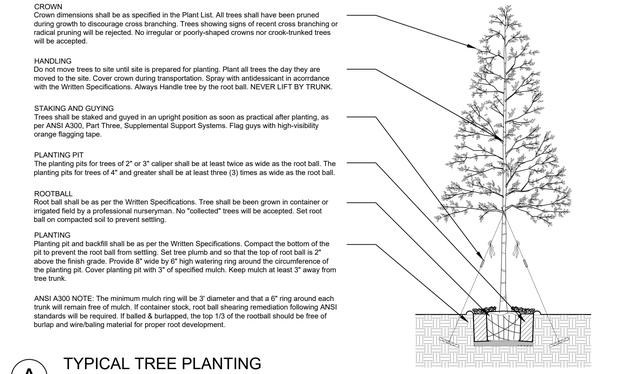


A TYPICAL TREE PLANTING


Not To Scale

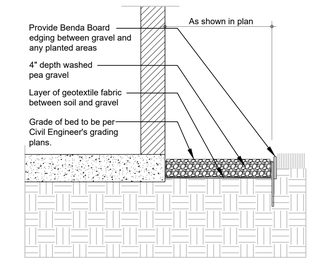

H PEA GRAVEL MOW STRIP

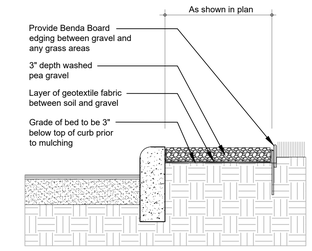

I PEA GRAVEL MULCH

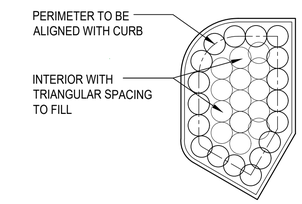


NOTE: OFFSET FROM CURBS SHALL BE 1/2 OF THE SPACING PLUS 6”, OR AS FOLLOWS:

48" SPACING: 24" + 6" =	30"
36" SPACING: 18" + 6" =	24"
30" SPACING: 15" + 6" =	21"
24" SPACING: 12" + 6" =	18"
18" SPACING: 9" + 6" =	15"


F TYPICAL PLANTING SPACING - PLAN

Not To Scale

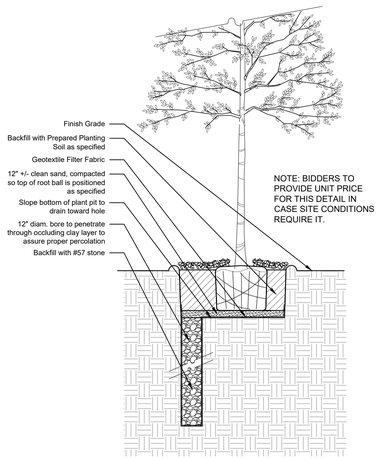


G TREE PLANTING OVER CLAY LAYER

Not To Scale

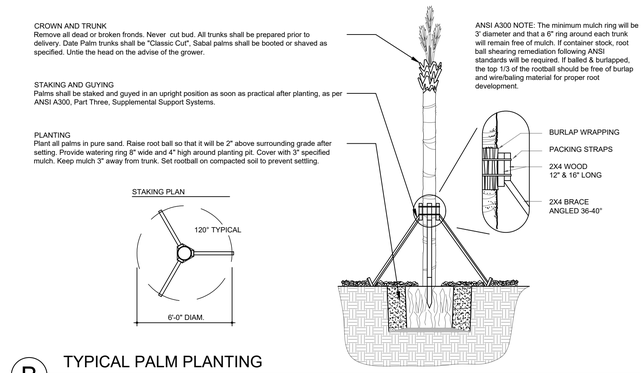


B TYPICAL PALM PLANTING

Not To Scale

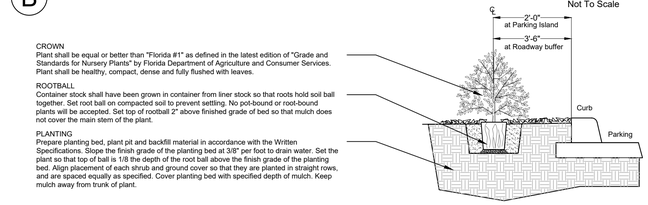

C TYPICAL PIT-PLANTED SHRUB PLANTING

Not To Scale

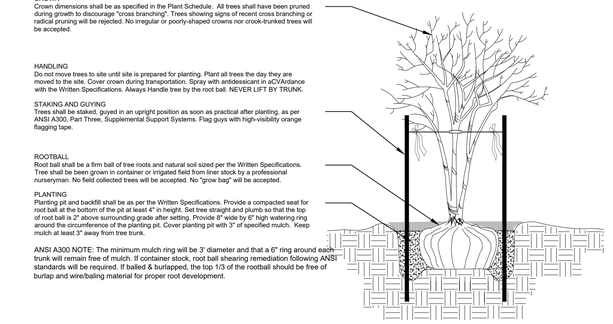

D TYPICAL MULTI-TRUNK TREE PLANTING

Not To Scale

These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing only other than SDG shall automatically revoke SDG's liabilities to any and all liability claims, suits or litigation by any interested parties in the project.

COPYRIGHT ©

FILE:

PLOTTED:

LOGIN:

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT GEORGE T. STURCH, JR. 1295 STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

LANDSCAPE NOTES

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-08

Always call 811 two full business days before you dig
Sunshine811.com

PLANTING SPECIFICATIONS

PART 1. GENERAL

1.0 SCOPE: Furnish all materials, tools, equipment, and labor necessary for the professional installation of all plant materials and accessories as described in the Contract Documents in accordance with all the requirements specified herein.

1.1 REFERENCES AND NORMATIVE REFERENCES: All work, work products, installation, and operations shall be governed by the following:

A. The American National Standards Institute, Tree, Shrub, and Other Woody Plant Management - Standard Practices (ANSI A300), all parts, current edition.
B. The accompanying companion publications, Best Management Practices (BMP) to the ANSI A300 Standards, all parts.
C. The American National Standards Institute, ANSI Z133.
D. Florida Grades and Standards for Nursery Plants, current edition.
E. The American National Standards Institute, ANSI Z60.1.
F. The contractual obligations regarding plant quantity and size as outlined in the attached documentation and Landscape Architect notations for each species of tree or plant.

1.2: VERIFICATION: All scaled dimensions on the drawings are approximate. Before proceeding with any work, the Contractor shall carefully check and verify all dimensions and quantities and shall immediately inform the Owner's Representative of any discrepancies between the information on the drawings and the actual conditions, refraining from doing any work in said areas until given approval to do so by the Owner's Representative. In the case of a discrepancy in the plant quantities between the plan drawings and the plant call outs, list or plant schedule, the number of plants or square footage of the planting bed drawn on the plan drawings shall be deemed correct and prevail.

1.3: PERMITS AND REGULATIONS: The Contractor shall obtain and pay for all permits related to this section of the work unless previously excluded under provision of the contract or general conditions. The Contractor shall comply with all laws and ordinances bearing on the operation or conduct of the work as drawn and specified. If the Contractor observes that a conflict exists between permit requirements and the work outlined in the contract documents, the Contractor shall promptly notify the Owner's Representative in writing including a description of any necessary changes and changes to the contract price resulting from changes in the work.

A. Wherever references are made to standards or codes in accordance with which work is to be performed or tested, the edition or revision of the standards and codes current on the effective date of this contract shall apply, unless otherwise expressly set forth.

B. In case of conflict among any referenced standards or codes or between any referenced standards and codes and the specifications, the more restrictive standard shall apply or Owner's Representative shall determine which shall govern.

1.4: PROTECTION OF WORK, PROPERTY AND PERSON: The Contractor shall adequately protect the work, adjacent property, and the public, and shall be responsible for any damages or injury due to his/her actions.

1.5: CHANGES IN THE WORK:

A. The Owner's Representative may order changes in the work, and the contract sum should be adjusted accordingly. All such orders and adjustments plus claims by the Contractor for extra compensation must be made and approved in writing before executing the work involved.

B. All changes in the work, notifications and contractor's request for information (RFI) shall conform to the contract general condition requirements.

1.6 NOTIFICATION: Notify the owner's representative fourteen (14) working days in advance of product delivery to the landscape site, and installation, to allow on-site inspection of plant material according to the Grades and Standards, planting procedures, and verification of plant material size and quantity. Every effort shall be made to grade plant material and contractual obligation as to plant size and quantity at the time of plant delivery; however, this grading procedure may take place after the plant material is installed. It shall be the landscape contractor's responsibility to maintain plant vitality until the time of this inspection.

1.7: CORRECTION OF WORK

A. The Contractor, at their own cost, shall re-execute any work that fails to conform to the requirements of the contract and shall remedy defects due to faulty materials or workmanship upon written notice from the Owner's Representative, at the soonest as possible time that can be coordinated with other work and seasonal weather demands.

1.8: DEFINITIONS

A. All terms in this specification shall be as defined in the "Glossary of Arboricultural Terms" or as modified below.
B. Container plant: Plants that are grown in and/or are currently in a container including boxed trees.
C. Defective plant: Any plant that fails to meet the plant quality requirement of this specification.
D. End of Warranty Final Acceptance: The date when the Owner's Representative accepts that the plants and work in this section meet all the requirements of the warranty. It is intended that the materials and workmanship warranty for Planting, Planting Soil, and Irrigation work run concurrent with each other.
E. Field grown trees (B&B): Trees growing in field soil for at least 12 months prior to harvest.
F. Healthy: Plants that are growing in a condition that expresses leaf size, crown density, color; and with annual growth rates typical of the species and cultivar's horticultural description, adjusted for the planting site soil, drainage and weather conditions.
G. Maintenance: Actions that preserve the health of plants after installation and as defined in this specification.
H. Maintenance period: The time period, as defined in this specification, which the Contractor is to provide maintenance.
I. Normal: the prevailing protocol of industry standard(s).
J. Owner's Representative: The person appointed by the Owner to represent their interest in the review and approval of the work and to serve as the contracting authority with the Contractor. The Owner's Representative may appoint other persons to review and approve any aspects of the work.
K. Reasonable and reasonably: When used in this specification relative to plant quality, it is intended to mean that the conditions cited will not affect the establishment or long term stability, health or growth of the plant. This specification recognizes that it is not possible to produce plants free of all defects, but that some accepted industry protocols and standards result in plants unacceptable to this project. When reasonable or reasonably is used in relation to other issues such as weeds, diseased, insects, it shall mean at levels low enough that no treatment would be required when applying recognized Integrated Plant Management practices. This specification recognizes that some decisions cannot be totally based on measured findings and that professional judgment is required. In cases of differing opinion, the Owner's Representative's expert shall determine when conditions are judged as reasonable.
L. Root ball: The mass of roots including any soil or substrate that is shipped with the tree within the root ball package.
M. Root ball package. The material that surrounds the root ball during shipping. The root package may include the material in which the plant was grown, or new packaging placed around the root ball for shipping.
N. Root collar (root crown, root flare, trunk flare, flare): The region at the base of the trunk where the majority of the structural roots join the plant stem, usually at or near ground level.
O. Shrub: Woody plants with mature height approximately less than 15 feet.
P. Spade harvested and transplanted: Field grown trees that are mechanically harvested and immediately transplanted to the final growing site without being removed from the digging machine.
Q. Stem: The trunk of the tree.
R. Substantial Completion Acceptance: The date at the end of the Planting, Planting Soil, and Irrigation installation where the Owner's Representative accepts that all work in these sections is complete and the Warranty period has begun. This date may be different than the date of substantial completion for the other sections of the project.
S. Stem girdling root: Any root more than ¼ inch diameter currently touching the trunk, or with the potential to touch the trunk, above the root collar approximately tangent to the trunk circumference or circling the trunk. Roots shall be considered as Stem Girdling that have, or are likely to have in the future, root to trunk bark contact.
T. Structural root: One of the largest roots emerging from the root collar.
U. Tree: Single and multi-stemmed plants with mature height approximately greater than 15 feet.

1.9 SUBMITTALS

1.9.1: See contract General Conditions for policies and procedures related to submittals. Submit all product submittals at least 8 weeks prior to installation of plantings.

1.9.2: Plant Material: Representative photographs of all plant material meeting the specifications for this project, confirmation of the plant nurseries and/or farms, and the plant growers' certificates.

1.9.3: Soil Testing: Submit copies of the soil test results and Certificates of Analysis as described herein prior to commencement of construction. Soil amendments shall not be used to bring soil pH into the ranges as specified in these documents.

1.9.4: Product Cut Sheets: Submit copies of the product cut sheet describing the products to be used.

1.9.5: Samples: Submit samples of each product and material where required by the specification to the Owner's Representative for approval. Label samples to indicate product, characteristics, and locations in the work. Samples will be reviewed for appearance only. Compliance with all other requirements is the exclusive responsibility of the Contractor.

1.9.6: Material Safety Data Sheets for all chemicals fertilizers, weed and pest controls, and other potentially noxious or hazardous materials to be used on the project.

1.9.7: At contract closeout, submit all project record documents, operational and maintenance data warrantee, and two (2) copies of the maintenance records.

1.10 OBSERVATION OF THE WORK

1.10.1: The Owner's Representative may observe the work at any time. They may remove samples of materials for conformity to specifications. Rejected materials shall be immediately removed from the site and replaced at the Contractor's expense. The cost of testing materials not meeting specifications shall be paid by the Contractor.

1.10.2: The Owner's Representative shall be informed of the progress of the work so the work may be observed at the following key times in the construction process. The Owner's Representative shall be afforded sufficient time to schedule visits to the site. The failure of the Owner's Representative to make field observations shall not relieve the Contractor from meeting all the requirements of this specification. Scheduled visits may include:

A. SITE CONDITIONS PRIOR TO THE START OF PLANTING: review the soil and drainage conditions.
B. COMPLETION OF THE PLANT LAYOUT STAKING: Review of the plant layout.
C. PLANT QUALITY: Review of plant quality at the time of delivery and prior to installation. Review tree quality prior to unloading where possible, but in all cases prior to planting.
D. COMPLETION OF THE PLANTING: Review the completed planting.

1.11 PRE-CONSTRUCTION CONFERENCE
A pre-construction meeting with the Owner's Representative shall be scheduled at least seven (7) days before beginning work to review any questions the Contractor may have regarding the work, administrative procedures during construction and project work schedule.

1.12 QUALITY ASSURANCE:

1.12.1: Qualifications: landscape installation contractor shall have not less than five (5) years of experience as a landscape contractor and have completed a minimum of five (5) equivalent commercial landscape installations. Bidders for the work shall submit with their bids a written description of the facilities and personnel to be dedicated to the work, and a list of similar completed work.

1.12.2: Regulatory Requirements: All suppliers of plant material, including landscape installation, shall comply with the laws of the state of Florida as regulated by the Florida Department of Agriculture and Consumer Services and (DACS), Division of Plant Industry (DPI).

1.12.3: Soil Testing: It shall be the responsibility of the landscape contractor to provide two test soil samples of commercially prepared Planting Soils for use in amending beds and backfilling trees. The test results must include soil pH, cation exchange capacity (CEC), and all nutrients (N, P, K, Mg, S, B, Cu, Fe, Mn, and Zn). Soil testing must be done by any state-certified laboratory. Costs associated with this testing shall be the responsibility of the landscape contractor. Test results must be made and delivered to the Owner's representative at least eight (8) weeks prior to scheduling the installation.

1.13 DELIVERY, STORAGE, AND HANDLING:

1.13.1: Packing and Shipping:

A. Balled and Burlapped (B&B) plants shall be prepared, shipped, and handled in a manner that will not damage roots, branches, shape, and future development after planting. Root balls must be dug to sizes and ratios according to ANSI Z60.1, "American Standard for Nursery Stock."

1.13.2: Acceptance at site:

A. Deliver, or have delivered, fertilizers, pesticides, mulches, soil amendments, peat, or other materials in original, unopened containers bearing manufacturers guaranteed chemical analysis, name, tradename, trademarks, and conformance to state laws as may be applicable.
B. Do not deliver more material that can be maintained for quality and effectiveness prior to application.
C. At least one legible identification label with a plant or product name must be attached to each plant or product.
D. Notify the Owner representative of delivery schedule two (2) weeks in advance of actual delivery for inspection at the time of delivery.

1.13.3: Storage and Protection: Plant stock shall be delivered directly from the nursery to the installation site and immediately maintained in its required quality condition until installation.

1.13.4: Do not handle plant material by plant trunks or stems. Plant material with cracked root balls, or plants loose in the root ball, or trees showing scarring or damage on the trunk, will be rejected.

1.13.5: Perform planting as specified in these documents. Plant location, spacing, distance from curbs and walls, depth of planting, and other important aspects of the planting operation are governed by information including (but not exclusive to) the Landscape Plans, Plant List, Landscape Details, and Written Specifications. The contractor shall ensure that their field personnel are trained, informed, and able to execute the work accurately.

1.13.6: Installation shall occur only after other contractors do not need to access planting areas.

1.13.7: The Landscape Architect or the Owner's designee may reject plant materials at any point in the project.

1.13.8: Warranty: Plant material not conforming to the Contract Documents shall be replaced at no cost to the Owner regardless of the length of time it takes to make this determination.

PART 2. PRODUCTS

2.1 PLANT MATERIALS:

2.1.1: Plant Materials shall be defined as trees, shrubs, vines, grass, sod, and plants of all descriptions that are required to be furnished to the project in accordance with the Contract Documents.

2.1.2: Quality: All Plant Material furnished shall be to the standards stated in the Contract Documents.

2.1.3: Nomenclature (SPN, 1942) all plant material shall be true to name and type in accordance with names used on plants. Substitutions are not allowed without the written approval of the Landscape Architect. If plants specified in this document cannot be located or cannot be delivered as specified, notify the Landscape Architect immediately. Substitutions performed without the permission of the Landscape Architect may be rejected.

2.1.4: Standards: All plant material shall be installed and guaranteed as, "Florida #1 or better". Plant Material shall be nursery grown within plant hardiness zones in which the job site is located. Collected materials shall not be acceptable except as noted on plans.

2.1.5: Specimen Stock: When detailed on the Plant Schedule, "specimen" shall mean a Florida Fancy as described in Florida's Grades and Standards. Specimen Stock shall be approved by The Owner or their designee prior to installation.

2.1.6: Transplanted Stock: Existing material on the site may be transplanted to a new location only as indicated in the plans. This work shall be accomplished as specified by The Owner's Certified Arborist or Landscape Architect.

2.1.7: Local Availability: Where specified items and/or materials, such as mulch, fertilizer types, analysis, or quantities, etc. are unavailable or drastically different from appropriate local practice, attach to bid a description of proposed substitute and effect of this bid price.

2.2 FERTILIZER: Fertilizers shall be as specified by the soil testing company. The Contractor shall verify and conform to all local fertilizer codes. Fertilizers shall be applied in accordance with label directions. Submit the test information, the recommendations, and the name of the testing company to the Landscape Architect prior to the commencement of construction.

2.3 COMPOSTED HUMUS: Composted Humus material shall be manufactured by a licensed composting facility as regulated by the Environmental Protection Agency. Composted Humus shall meet all EPA guidelines, be free of pathogens and insects, and have a pH of 6.8 to 7.5.

2.4: WEED CONTROL: Weed Control shall be a granular, pre-emergent, weed control applied by a Florida State Certified Pest Control Operator holding a current certification in Lawn & Ornamentals, and per the weed control product label instructions.

2.4: ORGANIC MULCH: Organic Mulch shall be Grade "A" Pine Bark Mini-nuggets or as specified in the Plant List.

2.6 GUYING AND STAKING MATERIAL: Tree guying to be flat woven polypropylene material, 3/4 inch wide, and 900 lb. break strength. Color to be Green. Product to be ArborTie manufactured by Deep Root Partners, L.P. or approved equal. All staking and guying shall be as specified in Grades and Standards for Nursery Plants, Parts I and II (GSNS).

2.7 PESTICIDES: Insecticide for plant material shall be an approved type for residential areas that may be used without halting construction activity. Application shall be according to package label specifications by a Florida State Certified Pest Control Operator holding a current certification in Lawn & Ornamentals.

2.8 WATER: During the course of construction, the Contractor shall make, at his expense, whatever arrangements may be necessary to provide adequate irrigation of the planted areas. Contractor shall furnish all necessary hose, equipment, attachments, accessories, and labor.

2.9 PLANTING SOIL: Refer to Sheet L-08, Detail "J" for the design of the Planting Soil. Premixed planting soil shall be commercially prepared and shipped to the site if possible. It shall be fully mixed, natural, friable, fertile, fine sandy loam soil, free from weeds, weed seeds, litter, sods, rocks, stiff clay, and other debris, trash, and toxic substances.

2.11 EDGING: Where metal edging is indicated on the plan, it shall be green Permaloc Aluminum Edging, 3/16" x 4", black (PH: 1-800-356-9660), or pre-bid approved equal.

2.12 SOIL AMENDMENTS: Soil amendments shall not be used unless directed by the Landscape Architect or Owner's Representative. If necessary:

a. Lime shall be agricultural grade, gound dolomitic limestone. At least 90% shall pass a U.S.S. No. 10 sieve, and at least 50% shall pass a U.S.S. No. 96 sieve. Any caked or damaged lime will be rejected.
b. Aluminum Sulfate shall be finely ground commercial grade aluminum sulfate.

2.13: **WEED FABRIC**: Weed Fabric shall be RSI Premium Landscape Fabric, or approved equal.

2.14: **WEED FABRIC PINS**: The anchoring pins for Weed Fabric shall be a 4" long non-metallic, biodegradable pins such as Eco Turf Biodegradable Anchoring Pins, or equal.

PART 3. EXECUTION

3.1 EXAMINATION:

3.1.1: The Contractor shall verify that final grades have been established prior to commencement of landscape construction operations.

3.1.2: Inspect trees for compliance with Florida's Grades and Standards prior to installation. This inspection should include identification of insect or disease infestation or insect or disease presence even if below damaging populations. Immediately notify the Owner's representative or Landscape Architect of any incidents that would cause a plant to fall below acceptable industry standards. Do not install damaged plant material that falls below the level of industry standards or Florida's Grades and Standards.

3.2 PREPARATIONS:

3.2.1: Stake out location of all trees and bed areas for Landscape Architect approval prior to installation. Stake out the location of the plant rows at the specified distance from back of curb and faces of buildings.

3.2.2: Adhere to tree protection requirements such as no digging within protected root zone areas of existing tree areas as shown in the landscape drawings. You shall be responsible for any repercussions, including financial reprimands by the city or county government, caused by your activities in conflict with tree preservation efforts. These reprimands may include the cost of repair(s) by others in accordance with the requirements of local government authorities overseeing the preservation of site trees or plants.

3.2.3: All landscape operations shall be performed when the site is graded and the ground and can support the work. No landscape operations shall occur when the soils are saturated by weather or other means.

3.2.4: The Contractor shall be responsible for locating and staking underground utilities, electrical cables and/or lines, storage tanks, subsurface drainage, gas lines, or other obstructions prior to construction. Landscape elements may be relocated only with the approval of the Owner's representative or Landscape Architect.

3.2.5: The Contractor shall be responsible for any damage caused by their work to the existing improvements. Report the damage to the Owner's representative immediately.

3.2.6: Bed Preparation

3.2.6.1: Full Bed Preparation: Existing soil or debris including parking lot debris shall be removed to a depth of eighteen (18) inches below the top of the curb. The area shall then be backfilled with a the specified Planting Soil (Re: Sheet L-08/"J"). The area shall be hand-watered to collapse voids. Grade the finished bed to drain. Leave enough room for a three-inch (3") layer of mulch.

3.2.6.2: Pit Planting Preparation: Rake the old mulch and debris from the existing bed area. Grade the bed so that 2"-3" of mulch can be applied. In the case where existing trees occur within the bed area special techniques such as air- or hydro-excavation may need to be used to minimize damage to the roots. Otherwise, only hand digging shall be allowed within the protected root zone of existing trees. Dig holes as specified and fill w/specified Planting Soil.

3.2.6.3: Existing trees within planting bed areas shall not have their root system encumbered by the installation of new plant material. Do not till soil under existing trees protected root zone area(s). If plants are required within the existing root zone, great precautions must be taken to avoid cutting roots larger than half (1/2) inch in diameter. Contact the Landscape Architect or The Owner if these conditions are problematic or if roots will be severed when installing new landscape material. The Contractor is responsible for damages, including replacement costs or repair costs, done to existing trees and/or their root systems.

3.2.7: Bed Edging: Install specified edging per the manufacturer's recommendations where shown in the landscape plans.

3.2.8: Excavation: Dig planting pits at a width that is two (2) times the width of the root ball. The depth of the pit shall be approximately 7/8 of the root ball so that the top of the root ball finishes at 2" above the surrounding grade.

3.3 PLANTING INSTALLATION:

3.3.1: Setting: The bottom of the planting pit shall be compacted so that settling does not occur. Each plant shall be installed in the center of its pit and set plumb. All plants shall be adjusted and aligned with surrounding plants. Each plant shall be properly faced to give the best effect. Fill around the plant with the specified Planting Soil. The plant shall be hand-watered to settle and collapse voids. The irrigation system shall not be used to settle the plant material.

3.3.2: All burlap shall be cut or removed to below the one-third point from the top of the root ball, down. Once the tree is set into place and burlap removed one third (1/3) down, carefully cut and remove the same proportionate amount of wire basket. Great care must be taken not to disturb the structural integrity of the root ball. If root ball structure or integrity will be compromised by the removal of the wire basket, do not remove the wire basket. Notify the Landscape Architect or The Owner's representative immediately. A colored ribbon shall be tied around the trunk of each such subject tree.

3.3.3: The Planting Soil shall be as specified on Sheet L-08, Detail "J", "PLANTING SOIL MIX"

3.4 FERTILIZING:

3.4.1: The Contractor shall be responsible for the application of fertilizer to the landscape. At approximately eight (8) weeks post-installation of ornamental plants, apply fertilizer analysis 8-2-12 (Howard Fertilizer Company: Blend Number: 201-7688). Fertilizer to ornamental plants shall be applied at the rate of fifteen (15) pounds of fertilizer per one thousand square feet of bed area. At approximately two (2) weeks after the sod has been installed and is firm to hand pulling, apply 13-3-13 (Howard Fertilizer Company: Blend number 201-0905) at the rate of fifteen (15) pounds of fertilizer per 1,000 square feet of sod.

A. Notify the Landscape Architect and the Owner's representative as to the total square footage of ornamental beds you will be fertilizing at this site.
B. Notify the Landscape Architect and the Owner's representative as to the total square footage of turfgrass you will be fertilizing at this site.
C. A paid receipt from Howard Fertilizer Company or the Owner's approved fertilizer vender shall be submitted to the Landscape Architect and the Owner's representative prior to the two (2) weeks required notice of fertilizing this subject landscape material.
D. The Landscape Architect or the Owner's representative shall be on-site to observe or assist in calibrating your rate of application prior to fertilizing this subject landscape. The Contractor must provide a two (2) week notification to the Owner's representative or Landscape Architect of fertilizer application.

3.5 PLANTING FINISHES:

3.5.1: Prune trees, if needed, in accordance with ANSI A300, Part 1. All dead, dying, or diseased limbs and branches shall be brought to the attention of the Landscape Architect prior to pruning. Pruning of trees must be performed by a Certified Arborist with current credentials obtained through the International Society of Arboriculture.

3.5.2: Weed Control: Ornamental bed and planting areas shall be delivered in a weed-free condition.

3.5.3: For trees and palms, the planting mix shall be smoothed and shaped to form a very shallow basin slightly larger than the installation pit. These basins shall then be mulched to a three (3) inch depth. Mulch shall be kept one (1) foot away from tree and palm tree trunks.

3.5.4: Approved mulch shall be as specified in the Plant List.

3.5.5: Trees and palm trees shall be staked, secured, and guyed according to the ANSI A300, Part 3.

3.5.6: The Contractor shall clean the site daily. Excess and waste materials shall be removed from lawn and bed areas, walks, drives, and parking areas.

3.5.6: The Contractor shall immediately repair any areas of the landscape which have been damaged by their own workers. Damage by other trades shall be documented and reported immediately to the Owner's representative. The entire project area, when completed, shall be neat and clean to the satisfaction of the Owner.

3.5.7: Replacement: The Contractor shall submit by written notice, at least ten (10) days before the end of the guarantee period, a request for inspection of your completed work. All plants that are missing, dead, or growing in an unsatisfactory condition (including those due to a lack of maintenance) as determined by the Owner or their representatives, shall be removed and replaced at the Contractor's expense. Acts of God, vandalism, and negligent acts of others are exempt from replacement if they have been previously documented and reported. All replacement plants shall be of the same quality, species, size, and condition as specified at the time of inspection.

3.7 MAINTENANCE:

3.7.1: The Contractor shall be responsible for the maintenance of the landscape and irrigation system from the commencement of the project to the final acceptance of the Owner.

3.7.2: The maintenance shall include but not limited to watering, weeding, mulching, tightening and repairing of support systems and guys for trees and palms, removal and replacement of dead plant material, resetting plants to proper grade or upright position, restoring saucers that hold water at the base of trees, pest control, monitoring and maintenance of the irrigation system, and any and all operations necessary maintain the landscape in excellent condition until the final acceptance of the Owner.

3.7.3: The maintenance shall begin immediately after each portion of the lawn and each plant has been installed and shall continue in regular intervals to industry standards and in accordance with weekly mowing of turfgrass, to a height of three and a half (3.5) inches, and all other maintenance requirements of an industry acceptable landscape.

3.7.4: The Contractor shall keep a maintenance log shall during the course of the Work. This maintenance log shall record the dates of maintenance activities including mowing, irrigation monitoring and repairs, pest control, and other activities. The maintenance log shall be available to the Owner's representatives at any time during the course of the Work. The Contractor shall provide a copy of the maintenance log at final approval.

SODDING

PART 1. GENERAL

1.0: Scope: furnish all materials, tools, equipment, and labor necessary to install the lawn or turfgrass area(s) in accordance and all requirements specified herein.

PART 2. PRODUCTS

2.1 Sodding Materials:

2.1.1: Sod, as specified, shall be nursery-grown, machine cut, sod harvested from cultivated agricultural land and growing specifically for sod purposes, production, and installation. Sod shall have received regular watering, mowing, fertilization, and weed control treatments to maintain superior quality and uniformity. The sod shall be of high vitality, well-rooted, and free from pests, noxious weeds, stone, and any other harmful. Sod shall have a uniform root system or mat of at least five-eighths (5/8) inch in depth, excluding the grass itself. Broken or torn pads (sod pieces themselves) shall be rejected. The sod shall be capable of supporting its own weight and retaining its size and shape when the supplier's standard size pad is suspended vertically from a firm grasp on the upper 10% of the pad and shaken somewhat vigorously. Sod shall be stored in a location and kept from drying out if not laid or installed upon delivery. Sod shall not be stored on-site for a period exceeding twenty-four (24) hours.

2.1.2: Fertilizer: after sod is rooted to the extent it cannot be pulled up by hand, approximately (two) 2 weeks after installation, apply fertilizer as outlined in **3.4.1** of this document. This analysis fertilizer is 80% organic but must be watered in after application or as soon as possible but not to exceed twenty-four (24) hours after fertilizer application. If there are watering restrictions, apply as late in the day as watering is allowed. The irrigation zones responsible for watering the sod should be set at one-hour duration. Repeat watering schedule taking careful consideration to not washing the fertilizer material below the root zone of the new sod. Submit paid receipts of all fertilizer materials to the Landscape Architect or the Owner's representative. Record fertilizer application dates and rates in the maintenance log for reference at any time during the duration of the project.

2.1.3: Water: for the execution of work shall be provided by the Owner.

PART 3. EXECUTION

3.1 Execution:

3.1: All sodding will be done when weather and soil conditions and the project schedule will minimize damage to be installed sod. Inclement weather conditions such as drought, or drought conditions, high winds, excessive moisture, frozen ground, or other unsuitable conditions that satisfactory results are not likely to be obtained, work shall be halted. Work shall not be resumed until desired results can be obtained or corrective measures have been taken. No sodding shall be installed on saturated ground. Under extraordinary conditions, and only with the Owner's written permission may sod be installed under conditions as listed herein.

3.3 Soil Preparation:

3.3.1: After areas have been brought to the required grade the top two (2) inches of soil shall be loosened prior. The planting area shall be made smooth and uniform by raking of all lumps, and soil clods two (2) inches in diameter or greater shall be thoroughly broken and foreign materials removed. Grade the sod bed in accordance with the Civil Engineer's plans. Where no grades are shown, or no plants are available, areas shall have a smooth and continual grade away from buildings and toward stormwater outfalls such as gutters or catch basins.

3.3.2: Do not disturb by tilling, harrowing, adding fill dirt, or otherwise disturbing in any manner the soil under the drip line of any site or pre-existing tree. Sod shall be laid or installed under tree canopies at a ratio of one (1) radial foot for every inch of trunk diameter away from the tree trunk in a circular fashion. The areas where no sod is specified, the tree's protected root zone area shall be mulched with mini-pine bark nuggets. Irrigation lines are not to be installed under the canopy of any tree. Irrigation must stop at the end of the drip lines of any tree. Trenching or any type of disruption under the drip line of any tree will expose the Contractor to repair or replacement costs of the subject trees.

3.4 Sod Installation:

3.4.1: The sod bed shall be moist but not saturated with water prior to installation. Sodded areas shall be as per drawings. Sod shall be laid as soon as possible but not longer than twenty-four (24) hours after arrival on site. Sod shall be laid in straight lines, perpendicular to the slope, and placed tightly against each other. Lateral joints shall be staggered, and care shall be exercised to butt the joints tightly without overlapping. As sodding is complete the entire area shall be rolled. Sod laid on slopes steeper than a 3:1 shall be held in place by non-metal sod stakes driven through sod into the soil until flush or slightly below the top of the sod. Water immediately after installation. The installation shall be inspected for unevenness and gaps between sod pieces. Any gaps discovered during the post-installation inspection must be filled with sod. Uneven areas must be again rolled.

3.5 Sod Maintenance and Guarantee:

3.5.1: Sodded areas shall be protected and maintained by watering, mowing, fertilizing, and resodding as necessary until an acceptable stand is established and until acceptance of the job has been completed.

3.5.2: Resodding shall be done the same as the original installation and done in a manner that will cause a minimum of disturbance to the existing stand. Any areas that have had the topsoil washed away shall be filled to match the specified grade with topsoil before resodding.

3.5.3: Irrigate the sod daily until established, then as necessary to maintain a high-quality turfgrass, unless adequate rainfall has occurred.

3.5.4: Mechanical maintenance shall be by species of sod. The contractor shall submit maintenance guidelines prior to construction. Mow with approved mowing equipment by species of sod. Maintain at optimal heights of sod species. The landscape contractor shall notify the irrigation system installer if adjustment to heads is required for mowing.

3.5.5: Weeding shall be done as weeds are observed.

3.5.6: Dead, diseased, or browned sod shall be replaced immediately.

END OF PLANTING SPECIFICATIONS

Always call 811 two full business days before you dig
Sunshine811.com

These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically revoke SDG's liabilities to any and all liability claims, suits or litigation by any interested parties in the project.
COPYRIGHT ®
FILE:
PLOTTED:
LOGIN:

STURCH DESIGN GROUP
Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT GEORGE T. STURCH, JR. 1295 STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

LANDSCAPE NOTES


ISSUE DATE:

FEBRUARY 10, 2025


REVISIONS:

SHEET NUMBER:

L-09

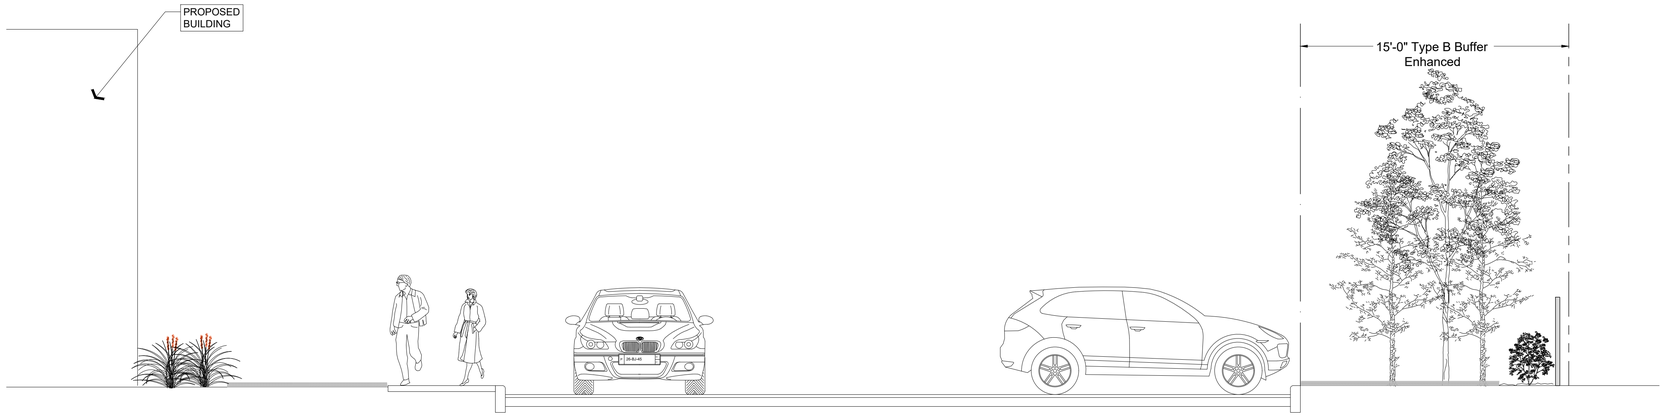

A Type "B" Buffer at Residential
1/4" = 1'-0"

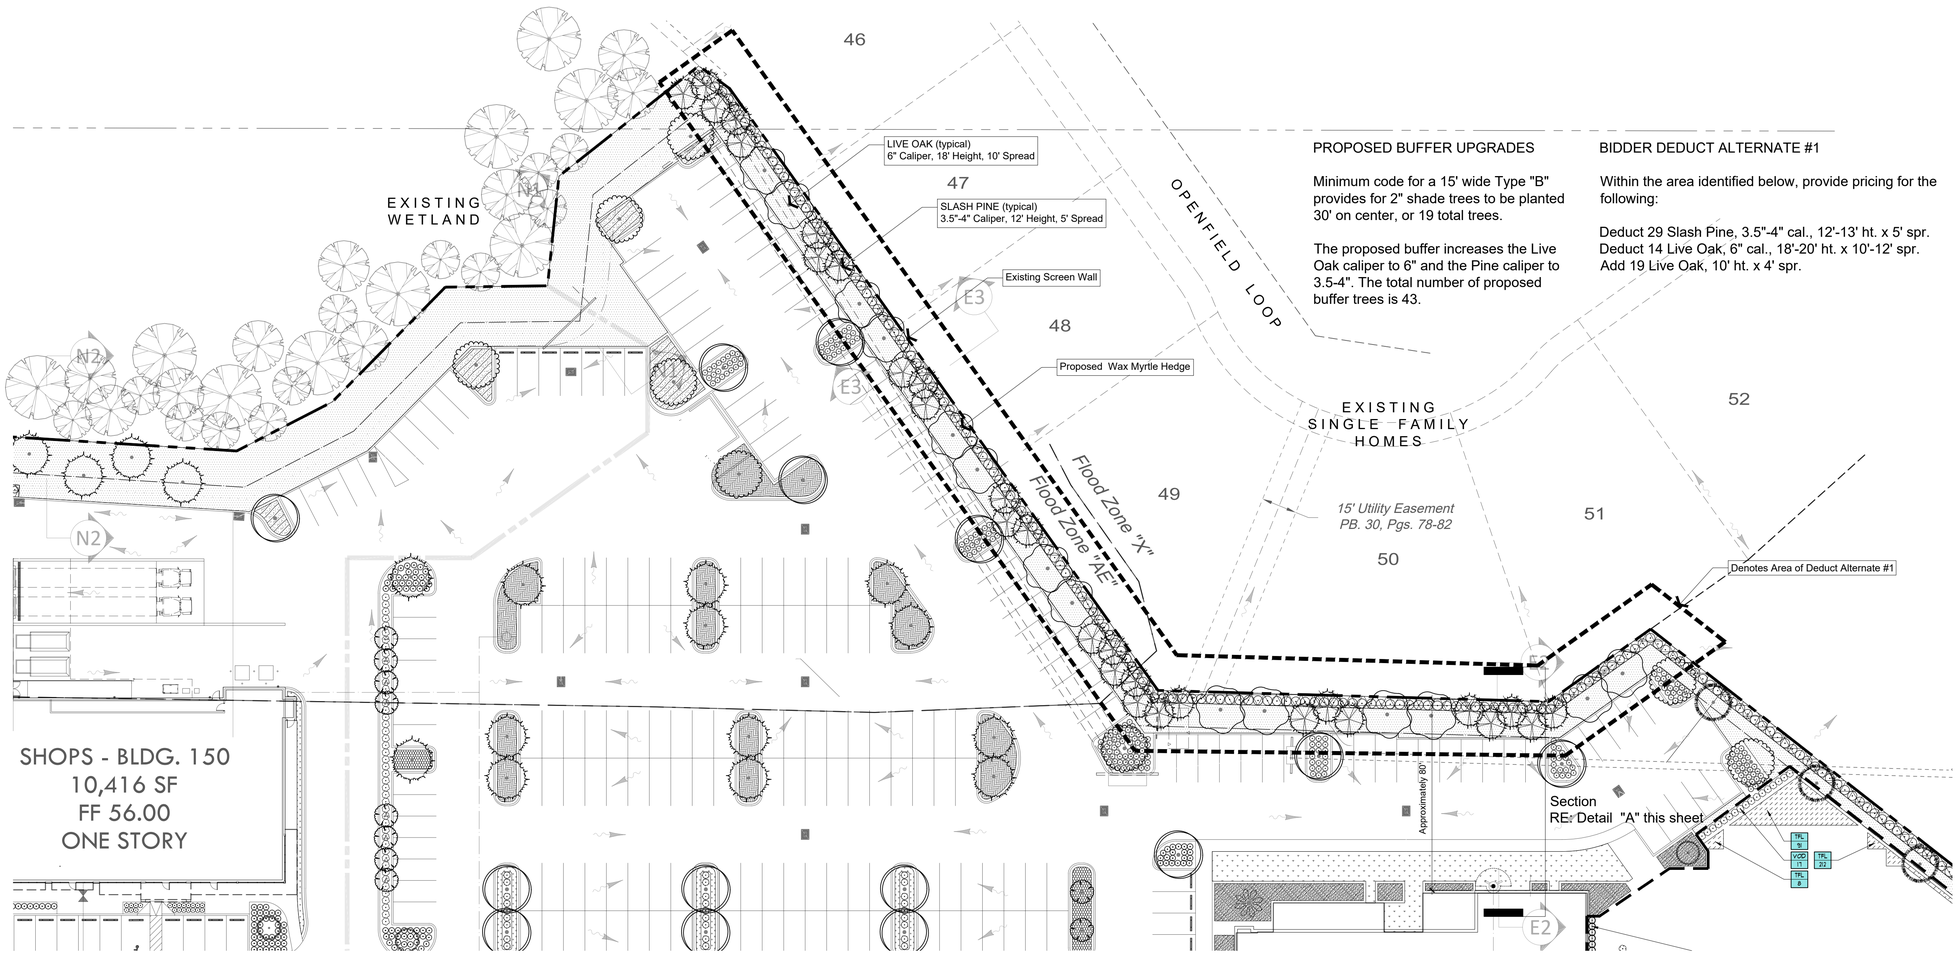

B Type "B" Buffer at Residential
1" = 30'-0"

PROPOSED BUFFER UPGRADES

Minimum code for a 15' wide Type "B" provides for 2" shade trees to be planted 30' on center, or 19 total trees.

The proposed buffer increases the Live Oak caliper to 6" and the Pine caliper to 3.5-4". The total number of proposed buffer trees is 43.

BIDDER DEDUCT ALTERNATE #1

Within the area identified below, provide pricing for the following:

Deduct 29 Slash Pine, 3.5"-4" cal., 12'-13' ht. x 5' spr.
Deduct 14 Live Oak, 6" cal., 18'-20' ht. x 10'-12' spr.
Add 19 Live Oak, 10' ht. x 4' spr.

STURCH
DESIGN
GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE
OF
FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:
BUFFER ENHANCEMENT


ISSUE DATE:
FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:
L-10

COPYRIGHT ®
These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically revoke SDG's harmless to any and all liability claims, suits or litigation by any interested parties in the project.

FILE:
PLOTTED:
LOGIN:

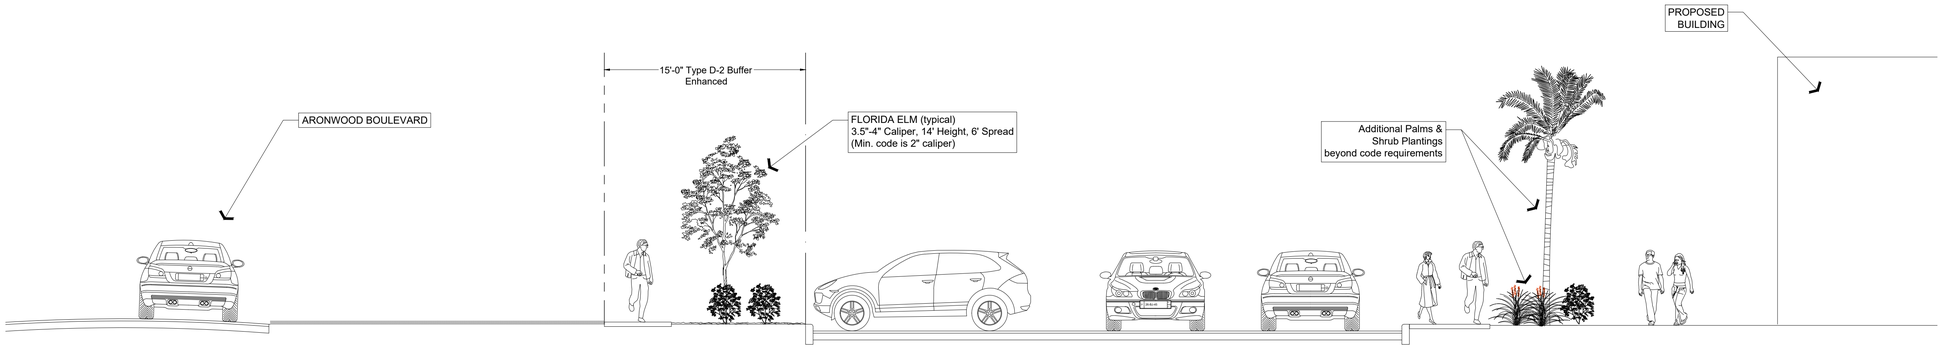

A Type "D-2" Buffer at Aronwood Blvd
1/4" = 1'-0"

PROPOSED BUFFER UPGRADES


Minimum code for a 15' wide Type "B" provides for 2" shade trees to be planted 30' on center.

The proposed buffer increases the Florida Elm to 3.5"-4". The building perimeter planting adjacent to Aronwood includes four (4) additional palms (Livistona nitida) and 120 l.f. of additional shrub hedge planting, beyond the building, along the north side of the parking lot.


BIDDER DEDUCT ALTERNATE #2

Within the area identified on this sheet, provide pricing for the following:

Deduct 11 Florida Elm, 3.5"-4" cal., 14' ht. x 6' spr.
Add 11 Florida Elm, 2" cal., 10' ht. x 4' spr.

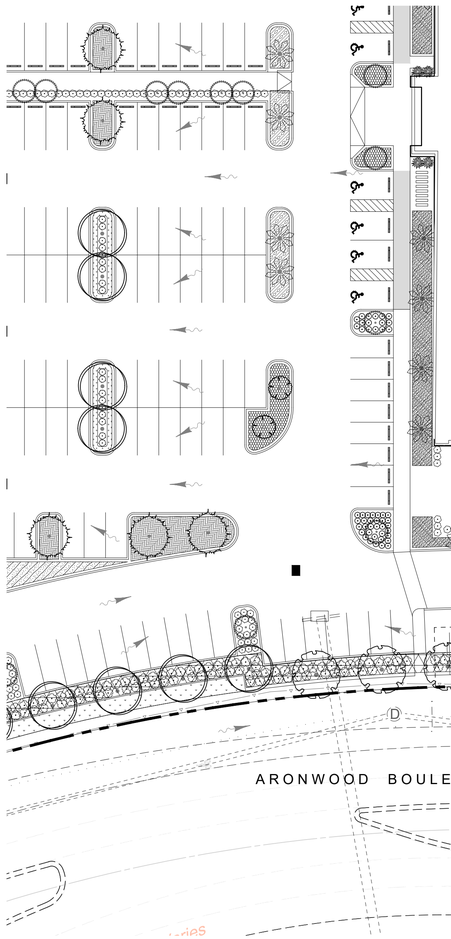

MAJOR TENANT B
BLDG 400
84,500 SF
FF 56.70
2-STORIES
45' MAX. HT.

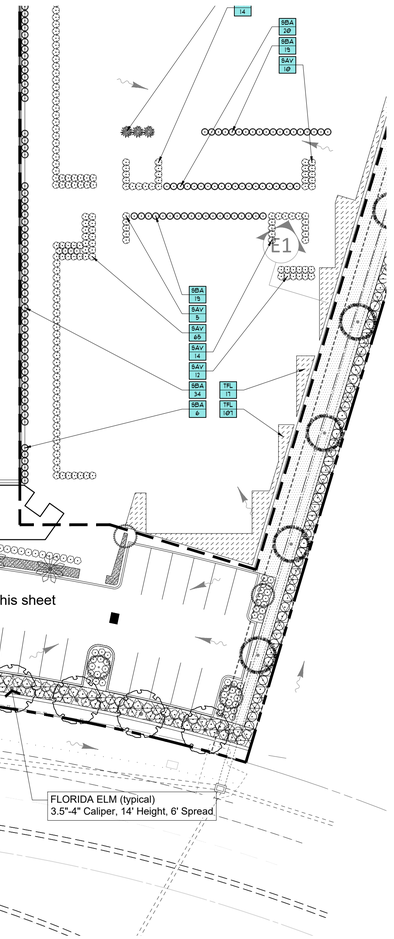

B Type "D-2" Buffer at Aronwood Blvd
1" = 30'-0"

These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, regardless of how minor, without the written approval of SDG is prohibited. Any changes the drawing any other than SDG shall automatically relieve SDG licensure to any and all liability claims, suits or litigation by any interested parties in the project.
COPYRIGHT ®
FILE:
PLOTTED:
LOGIN:

STURCH
DESIGN
GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

BUFFER ENHANCEMENT


ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-11

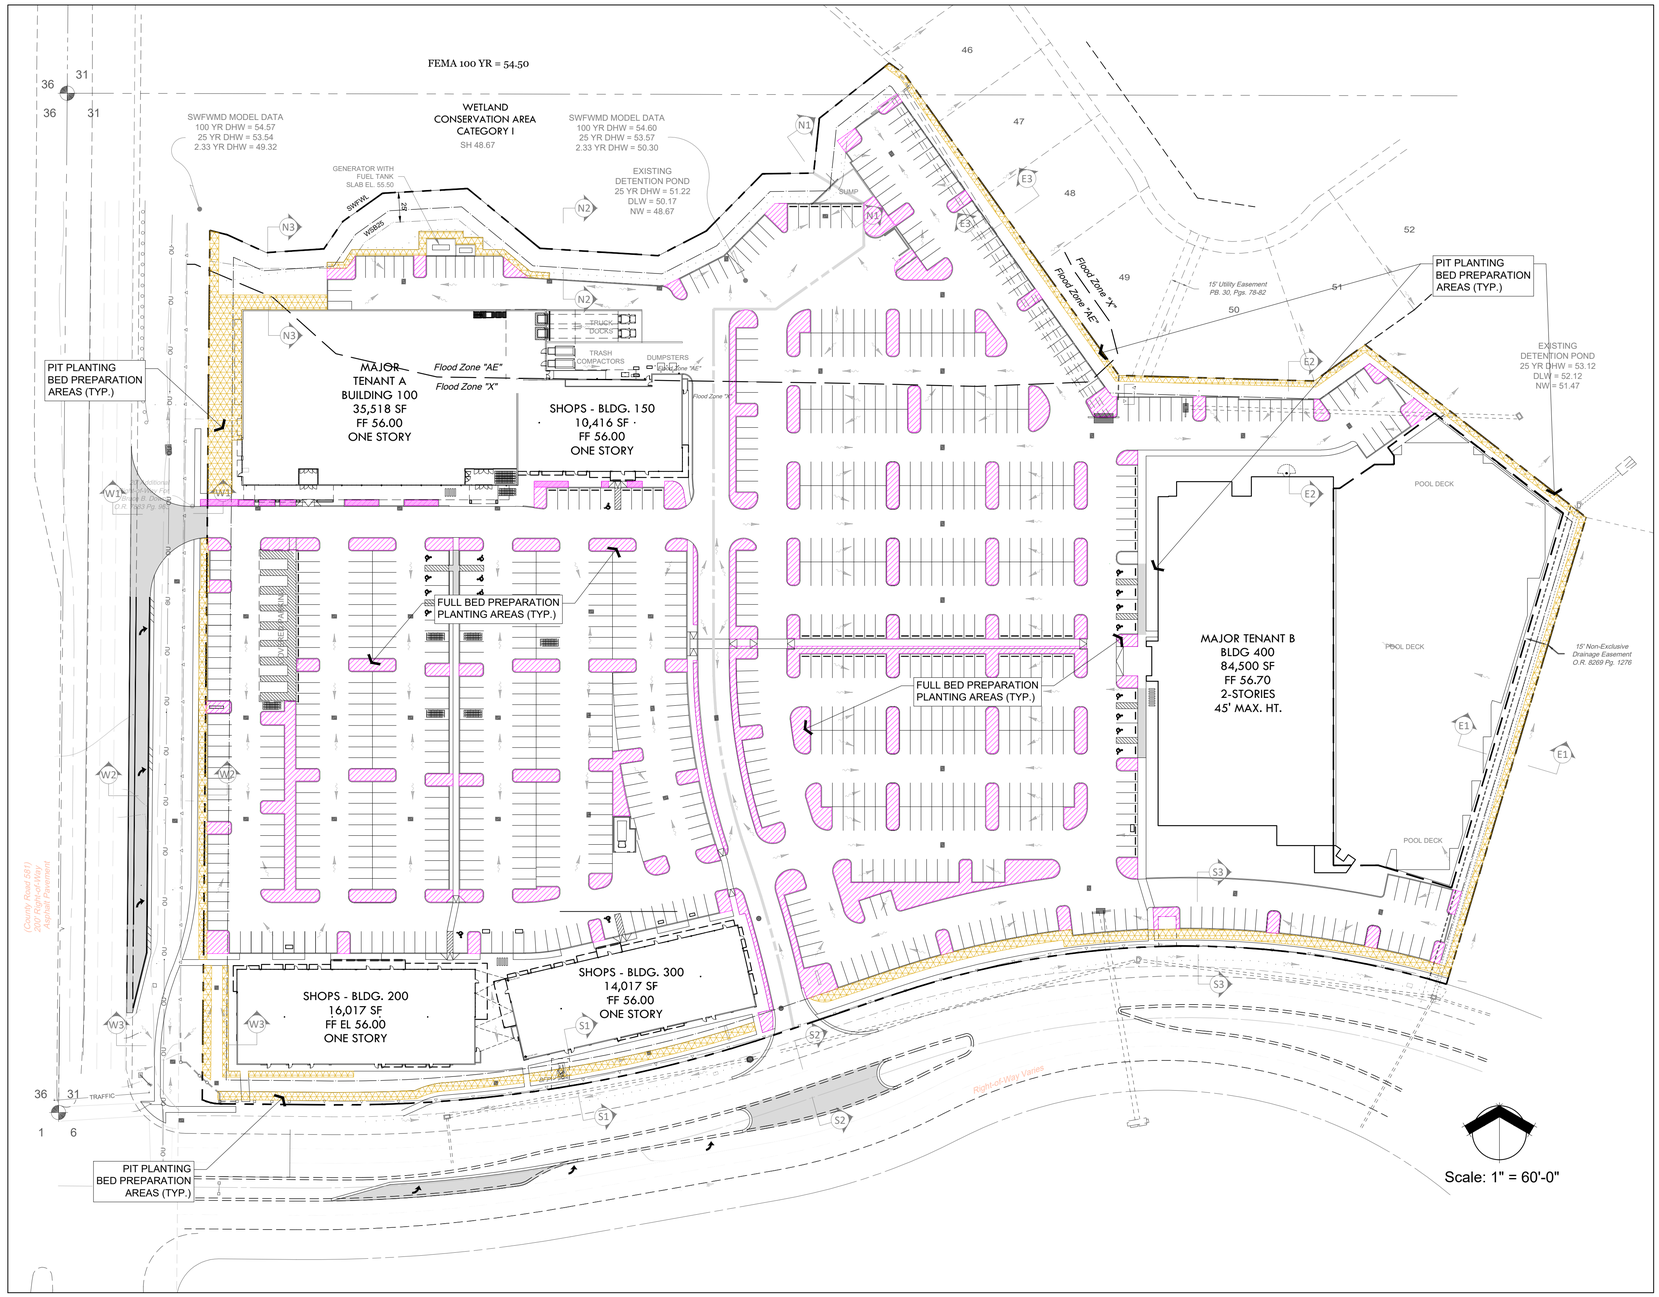

Bed Preparation Graphic Key

Areas of Full Bed Preparation

Areas of Pit Planting Bed Preparation

Existing Soil Removal Notes

1. Coordinate planting soil removal and replacement with General Contractor and Site Work Contractor prior to the commencement of site work.
2. Refer to the Civil site work plans for tree barricade locations and ensure all barricades are in place prior to beginning site work.
3. No soil removals shall occur within the tree root protection zone barricades as required to by Pasco County, FL.

Bed Preparation Notes

1. Read and follow the notes and Written Specifications for Planting Soil and Bed Preparation.
2. Areas of Full Bed Preparation and Pit Planting shall be as shown in this plan.
3. Pit Planting occurring within the protected root zone of existing trees may require smaller sized plants or other measures to avoid damaging the roots. Notify Landscape Architect of such field conditions.

BIDDER ADD ALTERNATE #1

Within the areas identified on this sheet, provide pricing for the following:

Areas of Full Bed Preparation:
Coordinate with the General Contractor and Site Work Contractor to provide soil removal to 18" below top of curb in all parking islands, and 16" compacted depth of Commercially Prepared Planting Soil Mix as specified on Sheet L-08, Detail "J" and depicted on Sheet L-08, Detail "E".

Note: Figure the percentage of compaction when estimating the cubic yardage.

STURCH DESIGN GROUP

Landscape Architecture
Planning
Urban Design

Sturch Design Group, Inc.
11411 Cypress Park Street
Tampa, FL 33624
813.610.4525
sturchdesigngroup@gmail.com

REGISTERED LANDSCAPE ARCHITECT
GEORGE T. STURCH, JR.
1295
STATE OF FLORIDA

George T. Sturch, Jr.
FL License LA 00001295

PROJECT TITLE:

MEADOW POINTE
TRACT 2

CLIENT:

SJC Ventures
1115 Howell Mill Rd. Suite 410
Atlanta, GA 30318

SHEET TITLE:

BED PREPARATION PLAN

ISSUE DATE:

FEBRUARY 10, 2025

REVISIONS:

SHEET NUMBER:

L-12

COPYRIGHT ®
These plans are the property of Sturch Design Group, Inc. (SDG) and shall be returned upon completion of the project. Use or copy is permitted by contract only. Any changes to these plans, signed or unsigned, without the written approval of SDG is prohibited. Any changes that the drawing any other than SDG shall automatically revoke SDG's liabilities to any and all liability claims, suits or litigation by any interested parties in the project.

FILE:

PLOTTED:

LOGIN: