Meadow Pointe II CDD

November 4, 2026

Table of Contents

Agenda 1

8 – District Engineer 2

11 – Architectural Review 3

14 - Operations Managers/Maintenance Report 11/4/26 4

November Newsletter 5

Board Discussion/Approval

FHP/PCSO Reports 6

Agenda

Meadow Pointe II Community Development District

Board of Supervisors

- □ John Picarelli, Chairperson
- □ Robert Signoretti, Vice Chairperson
- □ Chris Kluender, Assistant Secretary
- □ Kyle Molder, Assistant Secretary
- □ Jamie Childers, Assistant Secretary
- □ Jayna Cooper, District Manager
- □ Lindsay Moczynski, District Counsel
- □ Jerry Whited, District Engineer
- □ Justin Wright, Operations Manager
- □ John Khatiblou, Accountant

Wednesday, November 4, 2026 – 6:30 p.m.
Regular Meeting Agenda

Communications Media Technology Via Zoom:
https://us02web.zoom.us/j/4527478885?pwd=SWJycEJVU1VjSmVvSWRVeDJlcWIrZz09&omn=87393916259
Meeting ID: 452 747 8885 Passcode: 6DfetC
Call In #: 1-929-205-6099

1. **Call to Order**
2. **Roll Call**
3. **Pledge of Allegiance/Moment of Silence for our Fallen Service Members and First Responders**
4. **Close Meeting and Open Shade Meeting for Security Schedules**
5. **Landscaping report from Juniper**
6. **Audience comments**
7. **District Manager Report**
   - **A.** Consideration of Resolution 2027-02 Redesignation of Officers
   - **B.** Consideration of Resolution 2027-03 Amending Budget
   - **C.** Motion to Assign Fund Balance
8. **District Engineer Report**
   - **A.** Discussion of Engineer report
   - **B.** Discussion on progress for building and pool from meetings
   - **C.** Update on Stone Bins
   - **D.** Consideration of the Community Building Proposal
9. **District Counsel Report**
   - **A.**Wrencrest Appeal Status
   - **B.** Update on Morningside/Deer run sidewalks
   - **C**. Consideration of Notice of Preservation of Declaration of Restrictions for Morningside
   - **D.** Discussion on DRVC position
   - **E.** DRVC/Resolution for Tree Lawns
10. **Consent Agenda**
    - **A.** DRVC Violation log/pictures
11. **Architectural Review Discussion Items**
12. **Government/Community Updates**
    - **A.** Community Representative Update
      - i. Update on off duty Pasco County Sheriff Officer and activity report
    - **B.** Event Planning Representative/ Supervisor Jamie Childers
      - i. Next Event Update/Halloween Event progress/need for volunteers
13. **Items to approve/disapprove/discuss**
14. **Operations Manager Report**
15. **Audience Comments**
16. **Supervisor Comments**
17. **Adjournment**

Management
Inframark Management Services
2005 Pan Am Circle Ste 300
Tampa, Florida 33607

Meeting Location
Meadow Pointe II Clubhouse
30051 County Line Road
(813)-991-5016

Workshop

Agenda Items for Board Discussion

(No Motions/ Votes Accepted. Board Discussions Only)

1. Call to Order

2. Items for Discussion

A. Discussion on Deed restrictions revilements Morningside

3. Adjournment

RESOLUTION 2027-02

ESOLUTION OF THE BOARD OF SUPERVISORS OF THE MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT DESIGNATING THE OFFICERS OF THE DISTRICT AND PROVIDING FOR AN EFFECTIVE DATE.

WHEREAS, the Meadow Pointe II Community Development District ("**District**") is a local unit of special-purpose government created and existing pursuant to Chapter 190, *Florida Statutes*, being situated entirely within Pasco County, Florida; and

WHEREAS, pursuant to Chapter 190, *Florida Statutes*, the Board of Supervisors ("**Board**"), shall organize by electing one of its members as Chair and by electing a Secretary, and such other officers as the Board may deem necessary.

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF SUPERVISORS OF THE MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT:

1. **District Officers.** The District officers are as follows:

John Picarelli	Chairman
Robert Signoretti	Vice-Chairman
Brian Lamb	Secretary
Eric Davidson	Treasurer
Jamie Childers	Assistant Secretary
Kyle Molder	Assistant Secretary
Chris Kluender	Assistant Secretary
Jayna Cooper	Assistant Secretary

1. This Resolution shall become effective immediately upon its adoption.

PASSED AND ADOPTED THIS 4Th DAY OF NOVEMBER, 2026.

ATTEST:

Print Name: _____
Secretary/ Assistant Secretary

MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT

Print Name: _____
Chair/ Vice Chair of the Board of Supervisors

RESOLUTION 2027-03

A RESOLUTION OF THE BOARD OF SUPERVISORS OF THE MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT ADOPTING AN AMENDED BUDGET FOR THE FISCAL YEAR BEGINNING OCTOBER 1, 2025, AND ENDING SEPTEMBER 30, 2026, PROVIDING FOR APPROPRIATIONS; ADDRESSING CONFLICTS AND SEVERABILITY; PROVIDING FOR WEBSITE POSTING; AND PROVIDING FOR AN EFFECTIVE DATE.

WHEREAS, the Meadow Pointe II Community Development District ("**District**") is a local unit of special-purpose government created and existing pursuant to Chapter 190, Florida Statutes, being situated entirely within Pasco County, Florida, Florida; and

WHEREAS, the Board of Supervisors ("**Board**") previously adopted its budget ("**Budget**") for the fiscal year beginning October 1, 2025, and ending September 30, 2026 ("**Fiscal Year 2026**"); and

WHEREAS, the District Manager has prepared an amended budget to reflect changes in the actual appropriations of the Budget ("**Amended Budget**"); and

WHEREAS, Chapters 189 and 190, *Florida Statutes*, and the resolution adopting the Budget ("**Adoption Resolution**"), authorize the Board to amend the Budget within sixty (60) days following the end of Fiscal Year 2026; and

WHEREAS, the Board finds that it is in the best interest of the District and its landowners to amend the Budget to reflect the actual appropriations.

NOW, THEREFORE, BE IT RESOLVED BY THE BOARD OF SUPERVISORS OF THE MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT:

SECTION 1. BUDGET AMENDMENT.

a. The Board has reviewed the District Manager's proposed Amended Budget, copies of which are on file with the office of the District Manager and at the District's Records Office, and approves certain amendments to the Amended Budget, as shown in Section 2 below.

b. The Amended Budget, attached as Exhibit A and incorporated by reference, as amended by the Board ("**Adopted Annual Budget**"), is adopted in accordance with Sections 190.008(2)(a) and 189.016(6)(c), *Florida Statutes*; provided, however, that the comparative figures contained in the Adopted Annual Budget may be further revised as deemed necessary by the District Manager to further reflect actual revenues and expenditures for Fiscal Year 2026.

c. The Adopted Annual Budget will be maintained in the office of the District Manager and the District's Records Office and identified as "The Adopted Budget for Meadow

Pointe II Community Development District for the Fiscal Year Ending September 30, 2026, as further amended and adopted by the Board of Supervisors effective November 4, 2026."

SECTION 2. APPROPRIATIONS. There is hereby appropriated out of the revenues of the District, for Fiscal Year 2026, the sums set forth below, to be raised by special assessments or otherwise, which sums are deemed by the Board to be necessary to defray all expenditures of the District during Fiscal Year 2026, to be divided and appropriated in the following fashion:

GENERAL FUND	$ 2,554,597
DEBT SERVICE FUND	$ 622,125
CAPITAL PROJECTS FUND(S)	$ 0
TOTAL ALL FUNDS	$ 3,176,722

SECTION 3. CONFLICTS. This Resolution is intended to amend, in part, the Adoption Resolution, which remains in full force and effect except as otherwise provided herein. All terms of the Adoption Resolution that are not amended by this Resolution apply to the Adopted Annual Budget as if those terms were fully set forth herein. All District resolutions or parts thereof in actual conflict with this Resolution are, to the extent of such conflict, superseded and repealed.

SECTION 4. SEVERABILITY. The invalidity or unenforceability of any one or more provisions of this Resolution does not affect the validity or enforceability of the remaining portions of this Resolution, or any part thereof.

SECTION 5. WEBSITE POSTING. In accordance with Section 189.016(7), *Florida Statutes*, the District Manager must post the Adopted Annual Budget on the District's official website within five (5) days after adoption of this Resolution, and the Adopted Annual Budget must remain on the website for at least two (2) years.

SECTION 6. EFFECTIVE DATE. This Resolution takes effect upon adoption.

PASSED AND ADOPTED this 4th day of November 2026.

ATTEST:

_____
Secretary/Assistant Secretary

MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT

_____
Chairperson, Board of Supervisors

Exhibit A: Fiscal Year 2026 Amended Budget

Exhibit A:
Fiscal Year 2026 Amended Budget

[*Attached Beginning on Following Page*]

Proposed Budget Amendment
For the Period Ending September 30, 2026

ACCOUNT DESCRIPTION	CURRENT BUDGET	PROPOSED AMENDMENT	FINAL BUDGET	YEAR TO DATE ACTUAL	VARIANCE ($) FAV(UNFAV)
REVENUES					
Interest - Investments	$ 100	$ -	$ 100	$ -	$ (100)
Garbage/Solid Waste Revenue	273,456	-	273,456	273,456	-
Interest - Tax Collector	-	-	-	2,377	2,377
Rents or Royalties	-	-	-	880	880
Special Assmnts- Tax Collector	2,032,602	-	2,032,602	2,032,603	1
Special Assmnts- Discounts	(92,242)	-	(92,242)	(85,260)	6,982
Other Miscellaneous Revenues	25,000	-	25,000	13,604	(11,396)
Gate Bar Code/Remotes	5,000	-	5,000	6,321	1,321
Access Cards	1,300	-	1,300	4,475	3,175
TOTAL REVENUES	**2,245,216**	**-**	**2,245,216**	**2,248,456**	**3,240**
EXPENDITURES					
Administration					
P/R-Board of Supervisors	24,000	-	24,000	23,200	800
FICA Taxes	1,836	-	1,836	542	1,294
ProfServ-Arbitrage Rebate	3,850	-	3,850	-	3,850
ProfServ-Dissemination Agent	1,000	-	1,000	-	1,000
ProfServ-Engineering	64,500	-	64,500	41,385	23,115
ProfServ-Legal Services	42,000	-	42,000	53,384	(11,384)
ProfServ-Mgmt Consulting	82,000	-	82,000	82,010	(10)
ProfServ-Property Appraiser	150	-	150	150	-
ProfServ-Special Assessment	9,134	-	9,134	9,134	-
ProfServ-Trustee Fees	4,407	-	4,407	4,455	(48)
ProfServ-Web Site Maintenance	1,553	-	1,553	1,553	-
Auditing Services	4,400	-	4,400	4,400	-
Postage and Freight	1,500	-	1,500	1,204	296
Insurance - General Liability	52,212	-	52,212	57,221	(5,009)
Printing and Binding	100	-	100	6,913	(6,813)
Legal Advertising	1,000	-	1,000	1,247	(247)
Misc-Assessment Collection Cost	40,652	-	40,652	39,439	1,213
Misc-Supervisor Expenses	500	-	500	1,633	(1,133)
Misc-Contingency	-	-	-	6,580	(6,580)
Annual District Filing Fee	175	-	175	175	-
Total Administration	334,969	-	334,969	334,625	344
Field					
Contracts-Security Services	130,000	-	130,000	52,377	77,623
Contracts-Security Alarms	516	-	516	546	(30)
R&M-General	15,000	-	15,000	5,703	9,297
Total Field	145,516	-	145,516	58,626	86,890

Proposed Budget Amendment
For the Period Ending September 30, 2026

ACCOUNT DESCRIPTION	CURRENT BUDGET	PROPOSED AMENDMENT	FINAL BUDGET	YEAR TO DATE ACTUAL	VARIANCE ($) FAV(UNFAV)
Landscape Services					
ProfServ-Landscape Architect	10,000	-	10,000	10,080	(80)
Contracts-Landscape	245,000	-	245,000	189,654	55,346
Contracts-Perennials	15,750	-	15,750	16,088	(338)
R&M-Irrigation	14,000	-	14,000	7,618	6,382
R&M-Landscape Renovations	25,000	-	25,000	1,845	23,155
R&M-Mulch	25,000	-	25,000	22,400	2,600
R&M-Trees and Trimming	7,500	-	7,500	12,434	(4,934)
Total Landscape Services	342,250	-	342,250	260,119	82,131
Utilities					
Contracts-Solid Waste Services	257,049	-	257,049	264,472	(7,423)
Utility - General	14,000	-	14,000	11,835	2,165
Electricity - Streetlights	275,000	-	275,000	283,440	(8,440)
Utility - Reclaimed Water	8,000	-	8,000	6,343	1,657
Misc-Property Taxes	11,000	-	11,000	5,649	5,351
Misc-Assessment Collection Cost	5,469	-	5,469	5,306	163
Total Utilities	570,518	-	570,518	577,045	(6,527)
Lakes and Ponds					
Contracts-Lakes	82,500	-	82,500	74,886	7,614
R&M-Mitigation	1,000	-	1,000	-	1,000
R&M-Ponds	40,000	-	40,000	20,619	19,381
Reserve - Ponds	5,000	-	5,000	-	5,000
Total Lakes and Ponds	128,500	-	128,500	95,505	32,995
Parks and Recreation					
ProfServ-Info Technology	14,000	-	14,000	9,713	4,287
Contracts-Pools	30,000	-	30,000	34,680	(4,680)
Communication - Telephone & WiFi	12,000	-	12,000	12,768	(768)
Utility - General	2,000	-	2,000	1,533	467
Utility - Water & Sewer	7,500	-	7,500	5,405	2,095
Electricity - Rec Center	15,000	-	15,000	19,710	(4,710)
Lease - Copier	4,000	-	4,000	3,566	434
R&M-Clubhouse	13,000	-	13,000	14,317	(1,317)
R&M-Court Maintenance	2,000	-	2,000	5,616	(3,616)
R&M-Pools	8,000	-	8,000	7,196	804
R&M-Fitness Equipment	1,000	-	1,000	2,295	(1,295)
R&M-Playground	1,000	-	1,000	274	726
Misc-Clubhouse Activities	12,500	-	12,500	8,443	4,057
Office Supplies	3,000	-	3,000	1,376	1,624

Proposed Budget Amendment
For the Period Ending September 30, 2026

ACCOUNT DESCRIPTION	CURRENT BUDGET	PROPOSED AMENDMENT	FINAL BUDGET	YEAR TO DATE ACTUAL	VARIANCE ($) FAV(UNFAV)
Op Supplies - General	65,000	-	65,000	44,574	20,426
Op Supplies - Fuel, Oil	5,000	-	5,000	2,499	2,501
Cleaning Supplies	1,000	-	1,000	801	199
Reserve - Renewal&Replacement	20,000	205,000	225,000	224,843	157
Total Parks and Recreation	216,000	205,000	421,000	399,609	21,391
Personnel					
Payroll-Maintenance	442,000	58,000	500,000	499,657	343
Payroll-Benefits	3,600	-	3,600	-	3,600
FICA Taxes	33,813	-	33,813	38,227	(4,414)
Workers' Compensation	20,000	-	20,000	-	20,000
Unemployment Compensation	2,150	-	2,150	-	2,150
ProfServ-Human Resources	900	-	900	-	900
Op Supplies - Uniforms	3,000	-	3,000	2,527	473
Subscriptions and Memberships	2,000	-	2,000	2,842	(842)
Total Personnel	507,463	58,000	565,463	543,253	22,210
TOTAL EXPENDITURES	**2,245,216**	**263,000**	**2,508,216**	**2,268,782**	**239,434**
Excess (deficiency) of revenues Over (under) expenditures	-	(263,000)	(263,000)	(20,326)	242,674
OTHER FINANCING SOURCES (USES)					
Operating Transfers-Out	-	-	-	(1,786)	(1,786)
TOTAL FINANCING SOURCES (USES)	**-**	**-**	**-**	**(1,786)**	**(1,786)**
Net change in fund balance	-	(263,000)	(263,000)	(22,112)	240,888
FUND BALANCE, BEGINNING (OCT 1, 2025)	**2,553,550**	**-**	**2,553,550**	**2,553,550**	**-**
FUND BALANCE, ENDING	**$ 2,553,550**	**$ (263,000)**	**$ 2,290,550**	**$ 2,531,438**	**$ 240,888**

Proposed Budget Amendment
For the Period Ending September 30, 2026

ACCOUNT DESCRIPTION	CURRENT BUDGET	PROPOSED AMENDMENT	FINAL BUDGET	YEAR TO DATE ACTUAL	VARIANCE ($) FAV(UNFAV)
REVENUES					
Interest - Investments	$ -	$ -	$ -	$ -	$ -
Settlements	-	-	-	400	400
TOTAL REVENUES	**-**	**-**	**-**	**400**	**400**
EXPENDITURES					
Administration					
Payroll-Salaries	39,000	-	39,000	38,625	375
FICA Taxes	2,984	-	2,984	2,853	131
ProfServ-Legal Services	6,000	6,000	12,000	11,868	132
ProfServ-Mgmt Consulting	2,364	-	2,364	2,354	10
Postage and Freight	2,000	-	2,000	1,433	567
Misc-Assessment Collection Cost	996	-	996	-	996
Office Supplies	2,085	-	2,085	1,003	1,082
Total Administration	55,429	6,000	61,429	58,136	3,293
TOTAL EXPENDITURES	**55,429**	**6,000**	**61,429**	**58,136**	**3,293**
Excess (deficiency) of revenues Over (under) expenditures	(55,429)	(6,000)	(61,429)	(57,736)	3,693
Net change in fund balance	(55,429)	(6,000)	(61,429)	(57,736)	3,693
FUND BALANCE, BEGINNING (OCT 1, 2025)	**113,330**	**-**	**113,330**	**113,329**	**(1)**
FUND BALANCE, ENDING	**$ 57,901**	**$ (6,000)**	**$ 51,901**	**$ 55,593**	**$ 3,692**

Proposed Budget Amendment
For the Period Ending September 30, 2026

ACCOUNT DESCRIPTION	CURRENT BUDGET	PROPOSED AMENDMENT	FINAL BUDGET	YEAR TO DATE ACTUAL	VARIANCE ($) FAV(UNFAV)
REVENUES					
Interest - Investments	$ -	$ -	$ -	$ 36,212	$ 36,212
Special Assmnts- Tax Collector	28,726	-	28,726	28,726	-
Special Assmnts- Discounts	(1,149)	-	(1,149)	(1,062)	87
TOTAL REVENUES	**27,577**	**-**	**27,577**	**63,876**	**36,299**
EXPENDITURES					
Field					
Communication - Telephone & WiFi	1,000	-	1,000	1,051	(51)
R&M-Gate	3,000	-	3,000	4,989	(1,989)
R&M-Sidewalks	1	-	1	-	1
R&M-Security Cameras	2,000	-	2,000	685	1,315
R&M-Tree Removal	1	-	1	-	1
Misc-Assessment Collection Cost	575	-	575	557	18
Reserve - Gate	1,000	-	1,000	-	1,000
Reserve - Roadways	15,000	67,000	82,000	82,061	(61)
Reserve - Sidewalks	5,000	-	5,000	-	5,000
Total Field	27,577	67,000	94,577	89,343	5,234
TOTAL EXPENDITURES	**27,577**	**67,000**	**94,577**	**89,343**	**5,234**
Excess (deficiency) of revenues Over (under) expenditures	-	(67,000)	(67,000)	(25,467)	41,533
Net change in fund balance	-	(67,000)	(67,000)	(25,467)	41,533
FUND BALANCE, BEGINNING (OCT 1, 2025)	**679,249**	**-**	**679,249**	**679,249**	**-**
FUND BALANCE, ENDING	**$ 679,249**	**$ (67,000)**	**$ 612,249**	**$ 653,782**	**$ 41,533**

MEADOW POINTE II
COMMUNITY DEVELOPMENT DISTRICT

Motion: Assigning Fund Balance as of 09/30/26

The Board hereby assigns the FY 2026 Reserves as follows:

	FY2026
Fund 001	
Operating Reserves	555,054
Reserves - Pond	253,157
Reserves -Renewal & Replacement	40,342
Fund 002	
Operating Reserves	13,857
Fund 003	
Operating Reserves	5,958
Reserves - Roadways	213,923
Reserves - Sidewalks	53,660
Reserves - Gate	5,000
Fund 004	
Operating Reserves	2,546
Reserves - Roadways	57,778
Reserves - Sidewalks	9,614
Reserves - Gate	3,000
Fund 005	
Operating Reserves	3,830
Reserves - Roadways	215,310
Reserves - Sidewalks	4,293
Reserves - Gate	3,000
Fund 006	
Operating Reserves	2,554
Reserves - Roadways	42,271
Reserves - Sidewalks	4,658
Reserves - Gate	3,000
Fund 007	
Operating Reserves	4,849
Reserves - Roadways	233,930
Reserves - Sidewalks	4,000
Reserves - Gate	3,000
Fund 008	
Reserves - Roadways	12,040
Reserves - Sidewalks	10,000
Reserves - Gate	7,000
Fund 009	
Operating Reserves	7,149
Reserves - Roadways	216,652
Reserves - Sidewalks	43,431
Reserves - Gate	3,000

	FY2026
Fund 010	
Operating Reserves	4,852
Reserves - Roadways	142,267
Reserves - Sidewalks	16,744
Reserves - Gate	3,000
Fund 011	
Operating Reserves	5,618
Reserves - Roadways	163,787
Reserves - Sidewalks	43,706
Reserves - Gate	11,000
Fund 012	
Operating Reserves	4,086
Reserves - Roadways	122,862
Reserves - Sidewalks	35,544
Reserves - Gate	3,000
Fund 013	
Operating Reserves	3,830
Reserves - Roadways	202,966
Reserves - Sidewalks	1,936
Reserves - Gate	3,000
Fund 014	
Operating Reserves	6,894
Reserves - Roadways	199,804
Reserves - Sidewalks	8,804
Reserves - Gate	3,000

Note: Operating Reserves are not updated until the 1st Q FY27

SCOPE OF WORK: 10/27/2026

Meadow Pointe II CDD – PEMB Community Hall, PEMB Maintenance Bldg. & Sitework
Address: SE Corner Block of Mansfield Blvd. & County Line Rd.

Scope of Work Description:
The AE Scope Includes: Florida Building Code Research, Local Code, County Regulations, Limited Surveying & SWFWMD Compliance, Geotech, Schematic Design, Design Development, Construction Documents, Bidding Assistance, Permitting Assistance, & Construction Administration Services.
Disciplines: Civil, Geotech, MEP, & Structural Engineering.

See Conceptual Design Package for Preliminary Drawings

Bldg. 01: PEMB Community Hall: Area: 5,123 GSF
Bldg. 02: PEMB Facilities Maintenance Bldg.: Area: 1,765 GSF
Sitework: Area: 1.9 Acres

Construction Budget: $3.95M ($3M Buildings, $950K Site Development)

Architectural
- Project/ Design - Team Admin - Code Research/Summary - Architectural Site Plan
- Design Drawings (Plans, Elevations, Sections, Details) - General and Specific Notes - Specifications
- Room Finish Schedules - Door Hardware Schedules - Partition Schedules - Renderings

Structural Engineering
- Structural Design - Code Research/Engineering Analysis - Notes/ Specifications
- Design Drawings (Plans, Elevations, Details) - General and Specific Notes, Schedules
- Pre-Engineered Metal Buildings (PEMB) by Delegated-Design (Design slabs/ reactions only)

MEP Engineering
- MEP Design - Code Research/Engineering Analysis - Notes/ Specifications
- Design Drawings (Plans, Elevations, Details) - General and Specific Notes, Schedules

Civil & Surveying
- Limited Surveying and SUE work - Field Verification - Civil Design - Code Research
- Design Drawings (Plans, Sections, Details) - General and Specific Notes, Schedules

Geotech
- SPT Borings for Building Structures - SPT Borings (DRIT) for Ponds - Hand Augers as Needed

Exclusions: Environmental, Landscape Design

Task 1 – Code Research/ Planning/ Geotechnical

The A/E will provide code research and analysis for all parts of the work including Civil, Geotech, Architectural, Structural, & MEP. We will provide continued program development to include Structural & MEP Engineering into the current Program that was established in the previous Conceptual Design phase. Geotechnical boring, hand-auger, analysis, and report will be provided. The A/E will provide limited Surveying work (if needed) for the scope of work site areas for topography, boundaries, and trees.

Task 2 – Schematic Design

The A/E will produce schematic design drawings, floor plans & elevations, confirming the programmatic goals. MEP & Civil narrative. Specifications shall be identified and outlined by a table of contents. VE changes as need for Owner's budget.

Task 3 – Design Development

The A/E will produce design development drawings: Cover sheet, general information & code summary sheet, existing/demolition floor & reflected ceiling plans, proposed floor & reflected ceiling plans, building elevations, sections, details, and specifications. Includes MEP & Civil.

Task 4 – Construction Documents

The A/E will produce construction document permit drawings and specifications for construction: Cover sheet, general information & code summary sheet, existing/demolition floor & reflected ceiling plans, proposed floor & reflected ceiling plans, building elevations, sections, details, notes, schedules, construction details, and specifications. Includes MEP & Civil. Signed & sealed construction documents for permitting.

Task 5 – Bidding Assistance

The A/E will assist with Bidding: review pre-bid RFI's and providing responses, preparing addenda to the contract documents as necessary, and review of bids.

Task 6 – Permitting Assistance

The A/E will assist with Permitting: Prepare digitally signed & sealed contract documents for permitting submittal by the Contractor. Respond to permit review comments and make revisions to the contract documents as needed.

Task 7 – Construction Administration

The A/E will provide Construction Administration: Review of submittals and RFI's, issuance of ASI's and PR's, review of applications for payment, construction project site visits with field reports, substantial completion and final completion inspections, and close-out documents review.

Reference: Conceptual Sketches

NEW COMMUNITY BUILDING AND FACILITIES MAINTENCE AND STORAGE BUILDING

MEADOW POINTE II COMMUNITY BLDG.

MANSFIELD BLVD & COUNTY LINE RD - SE CORNER, WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT

WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

REP
RENKER EICH PARKS ARCHITECTS

ARCHITECT
RENKER EICH PARKS ARCHITECTS INC.
1609 Dr. Martin Luther King Jr. Street North
St. Petersburg, Florida 33704
(t) 727.821.2986
www.reparch.com

REPA PROJECT NO.: 2421.01

INDEX OF DRAWINGS

I GENERAL
A0.0 COVER
GA1.0 GENERAL ARCHITECTURAL

II ARCHITECTURAL
DA1.0 EXISTING SITE PLAN
A1.0 SITE PLAN
A1.1 FIRST FLOOR PLANS
A2.1 ROOF PLANS
A3.1 COMMUNITY HALL EXTERIOR ELEVATIONS
A3.2 COMMUNITY HALL EXTERIOR ELEVATIONS
A3.3 MAINTENANCE BUILDING EXTERIOR ELEVATIONS
A7.1 MEETING HALL REFLECTED CEILING PLANS
A7.2 MAINTENANCE BLDG. REFLECTED CEILING PLANS

DATE: 08/28/2026
CONCEPTUAL

ARCHITECTURAL ABBREVIATIONS

AB	ANCHOR BOLT
ACOUST	ACOUSTICAL
ADJ	ADJUSTABLE
AFC	ABOVE FINISHED CEILING
AFF	ABOVE FINISH FLOOR
AHU	AIR HANDLING UNIT
ALT	ALTERNATE
ALUM	ALUMINUM
ANOD	ANODIZED
AP	ACCESS PANEL
APPROX	APPROXIMATE
ARCH	ARCHITECTURAL
AT	ACOUSTICAL TILE
BD	BOARD
BFE	BASE FLOOD ELEVATION
BLDG	BUILDING
BM	BEAM
BOT	BOTTOM
BUR	BUILT-UP ROOFING
C.F.C.I.	CONTRACTOR FURNISHED AND CONTRACTOR INSTALLED
CAB	CABINET
CG	CORNER GUARD
CI	CAST IRON
CJ	CONTROL JOINT
CL	CLEAR
CLO	CLOSET
CMU	CONCRETE MASONRY UNIT
CNT	COUNTER
COL	COLUMN
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
CORR	CORRIDOR
CPT	CARPET
CT	CERAMIC TILE
DET	DETAIL
DIA	DIAMETER
DIAG	DIAGONAL
DIM	DIMENSION
DISP	DISPENSER
DN	DOWN
DWG	DRAWING
EB	EXPANSION BOLT
EJ	EXPANSION JOINT
EL	ELEVATION
ELEC	ELECTRICAL
ELEV	ELEVATION
EP	ELECTRICAL PANEL
EQ	EQUAL
EQUIP	EQUIPMENT
ETR	EXISTING TO REMAIN
EWC	ELECTRIC WATER COOLER
EX	EXISTING
EXP	EXPOSED
EXT	EXTERIOR
FC	FURRING CHANNEL
FD	FLOOR DRAIN
FEC	FIRE EXTINGUISHER CABINET
FF	FINISH FLOOR
FHC	FIRE HOSE CABINET
FIN	FINISH
FL	FLOOR
FR	FIRE RATED
GA	GUAGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GFRC	GLASS FIBER REINFORCED CEMENT
GFRG	GLASS FIBER REINFORCED GYPSUM
GL	GLASS
GR	GRADE
GWB	GYPSUM WALLBOARD
GYP	GYPSUM
HB	HOSE BIB
HT	HEIGHT
HVAC	HEATING, VENTILATING, & AIR CONDITIONING
ID	INSIDE DIAMETER
INSUL	INSULATION
INT	INTERIOR
JT	JOINT
KIT	KITCHEN
KW	KILOWATT
L	LENGTH
LAM	LAMINATE
LAV	LAVATORY
LF	LINEAR FEET
LKR	LOCKER
LL	LEAD LINED
LYR	LAYER
MFD	MANUFACTURED
MFR	MANUFACTURER
MH	MANHOLE
MIN	MINIMUM
MIR	MORROR
MISC	MISCELLANEOUS
MLDG	MOLDING
MO	MASONRY OPENING
MR	MOISTURE RESISTANT
MT	METAL THRESHOLD
MTD	MOUNTED
MTL	METAL
NIC	NOT IN CONTRACT
NOM	NOMINAL
NTS	NOT TO SCALE
OA	OVERALL
OC	ON CENTER
OD	OUTSIDE DIAMETER
OFCI	OWNER FURNISHED CONTRACTOR INSTALLED
PL	PLATE
PLAM	PLASTIC LAMINATE
PLAS	PLASTER
PLUMB	PLUMBING
PLWD	PLYWOOD
PNT	PAINT
PT	PRESSURE TREATED
PTD	PAPER TOWEL DISPENSER
PVC	POLYVINYL CHLORIDE
QT	QUARRY TILE
R	RADIUS
RCP	REINFORCED CONCRETE PIPE
RD	ROOF DRAIN
REC	RECEPTACLE
REF	REFRIGERATOR
REG	REGLET
REINF	REINFORCED
REQD	REQUIRED
RJ	REVEAL JOINT
RM	ROOM
RO	ROUGH OPENING
SCHD	SCHEDULE
SCRN	SCREEN
SEC	SECTION
SH	SHELF
SHT	SHEET
SIM	SIMILAR
SP	SPACE
SPECS	SPECIFICATIONS
SS	STAINLESS STEEL
STL	STEEL
STOR	STORAGE
STRUC	STRUCTURAL
SUSP	SUSPENDED
TB	TOGGLE BOLT
TC	TOILET COMPARTMENT
TEL	TELEPHONE
TEMP	TEMPERATURE
TPD	TOILET PAPER DISPENSER
TYP	TYPICAL
UC	UNDERCOUNTER
UNO	UNLESS NOTED OTHERWISE
UTIL	UTILITY
VB	VINYL BASE
VERT	VERTICAL
VEST	VESTIBULE
VIF	VERIFY IN FIELD
VTR	VENT THROUGH ROOF
VWC	VINYL WALLCOVERING
W	WIDTH
W/	WITH
WC	WATER CLOSET
WD	WOOD
WP	WEATHER PROOF
WWF	WELDED WIRE FABRIC

GENERAL PROJECT NOTES

A ISOLATE ALL DISSIMILAR MATERIALS, TYP.

B SEALERS TO BE COMPATIBLE WHERE IN CONTACT W/ ONE ANOTHER AND OTHER MATERIALS.

C CONTRACTOR SHALL HAVE PORTABLE FIRE EXTINGUISHER ON SITE AND AVAILABLE AT ALL TIMES.

D CONTRACTOR SHALL OBTAIN ALL PERMITS NECESSARY TO PERFORM THEIR PROJECT. ALL PERMIT FEES ARE BY OTHERS.

E DO NOT SCALE DRAWINGS, IF DIMENSIONS ARE IN QUESTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING CLARIFICATION FROM THE ARCHITECT PRIOR TO CONTINUATION OF WORK.

DIMENSION NOTES

1 ALL DOOR FRAME OPENINGS IN MASONRY SHALL BE 3'-4" MO UNO


2 ALL DIMENSION STRINGS SHALL BE TO FACE OF WALL STRUCTURE (IE CMU, MTL STUD FRAMING)

3 DIMENSION STRINGS NOTED AS CLEAR SHALL BE TO FACE OF FINISHED WALL OR PARTITION (IE FACE OF GWB, PLASTER, OR TILE)

4 DOOR JAMB RETURNS IN MASONRY WALLS TO HINGE SIDE SHALL BE 8" NOM UNO

5 DOOR JAMB RETURNS IN MTL FRAMING WALLS TO HINGE SIDE SHALL BE 4" NOM UNO

DRAWING LEGEND



DRAWING TITLE

BUILDING SECTION

COLUMN GRID LINES

ENLARGED PLAN OR SECTION

DETAIL SECTION

EXTERIOR ELEVATIONS

ELEVATION MARK

INTERIOR ELEVATIONS

ROOM NAME AND NUMBER

DOOR TAG

STOREFRONT WALL TYPE

PARTITION TYPE

KEYNOTE

REVISION TAG

BUILDING CODE SUMMARY

PROJECT DESCRIPTION:

BUILDING AREA (GROSS):

OCCUPANCY CLASSIFICATION / CONSTRUCTION TYPE:

APPLICABLE CODES

2023 FLORIDA BUILDING CODE - BUILDING
2023 FLORIDA BUILDING CODE - EXISTING BUILDING
2023 FLORIDA BUILDING CODE - MECHANICAL
2023 FLORIDA BUILDING CODE - PLUMBING
2023 FLORIDA BUILDING CODE - FUEL GAS
2023 FLORIDA BUILDING CODE - TEST PROTOCOLS
2023 FLORIDA BUILDING CODE - ENERGY (Chapter 13)
2023 FLORIDA BUILDING CODE - ACCESSIBILITY
2023 FLORIDA FIRE PREVENTION CODE, 8th EDITION
2020 NFPA 70 NATIONAL ELECTRICAL CODE
2021 NFPA 101 LIFE SAFETY CODE



SITE LOCATION

SCHEMATIC DESIGN

NEW COMMUNITY BUILDING AND FACILITIES
MAINTENCE AND STORAGE BUILDING

MEADOW POINTE II COMMUNITY BLDG.

MANSFIELD BLVD & COUNTY LINE RD - SE CORNER. WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT
WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

REP
RENKER EICH PARKS ARCHITECTS


PROJECT NO.:2421.01
DATE: 06/24/2026
DRAWN BY:YS
REVISIONS:

SHEET TITLE:
GENERAL ARCHITECTURAL

SHEET NO.:
GA1.0

7/2/2026 11:55:49 AM
Autodesk Docs://2421.01 MPII Community Hall & Facilities Maintenance/2421.01 - Meadow Pointe II Community Bldg.rvt

SPECIFIC NOTES

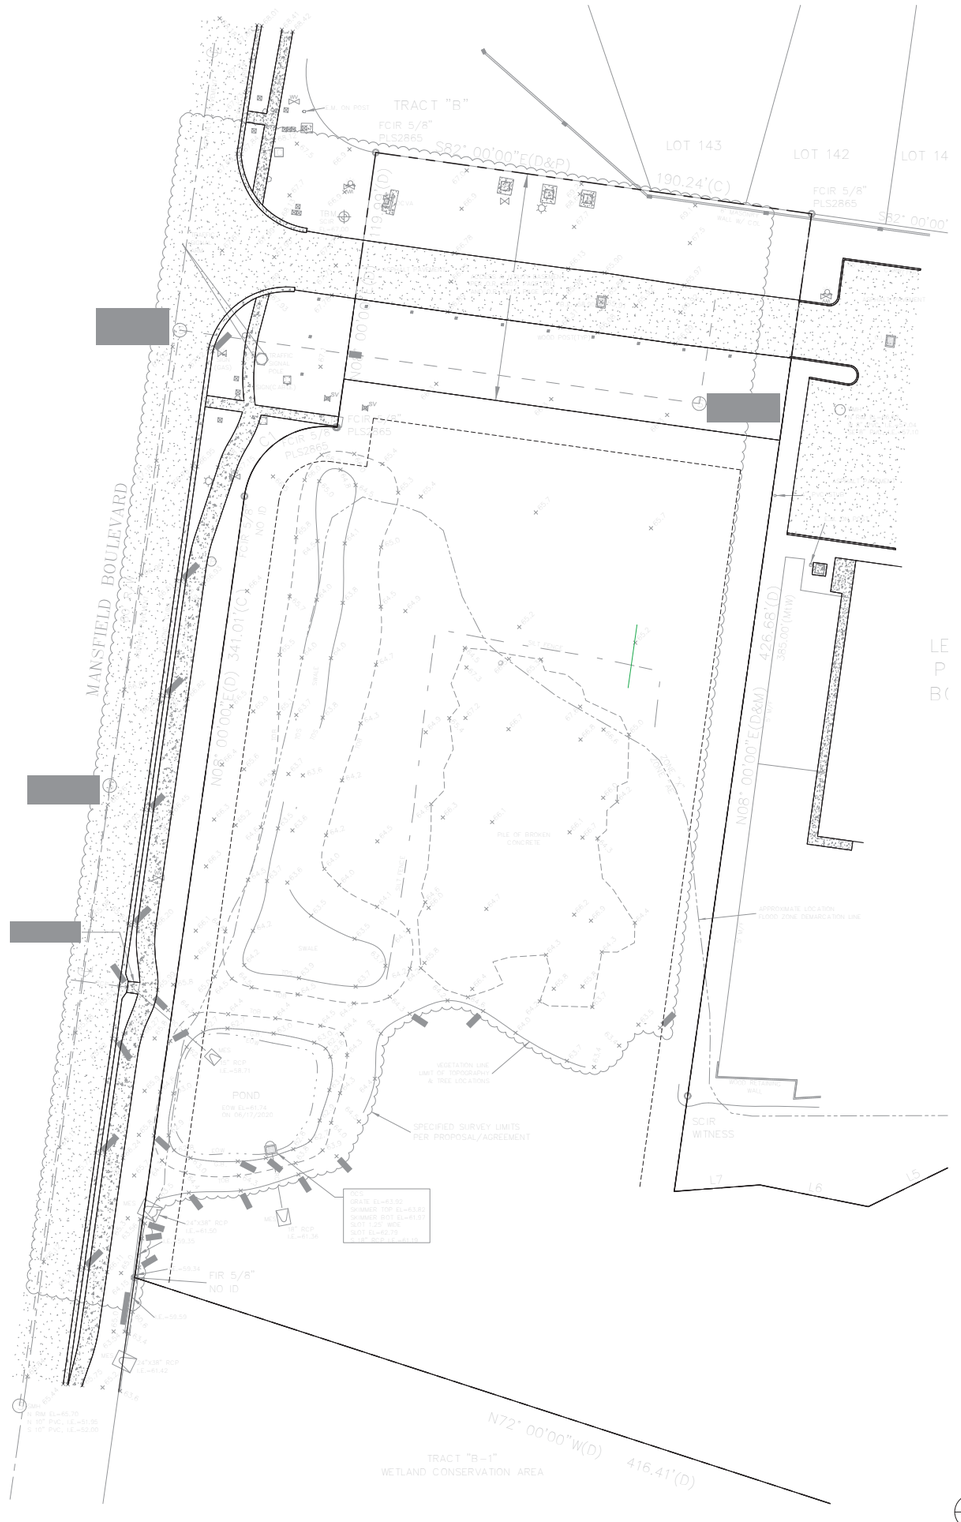

N

1 DA1.0 **EXISTING SITE PLAN**
1" = 30'-0"

REP
RENKER EICH PARKS ARCHITECTS

SCHEMATIC DESIGN

NEW COMMUNITY BUILDING AND FACILITIES
MAINTENCE AND STORAGE BUILDING
MEADOW POINTE II COMMUNITY BLDG.
MANSFIELD BLVD.& COUNTY LINE RD - SE CORNER. WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543
MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT
WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543


PROJECT NO.:2421.01
DATE: 06/24/2026
DRAWN BY:YS
REVISIONS:

SHEET TITLE:
EXISTING SITE PLAN

SHEET NO.:
DA1.0

7/2/2026 11:56:00 AM
Autodesk Docs://2421.01 MPII Community Hall & Facilities Maintenance/2421.01 - Meadow Pointe II Community Bldg.rvt

SPECIFIC NOTES

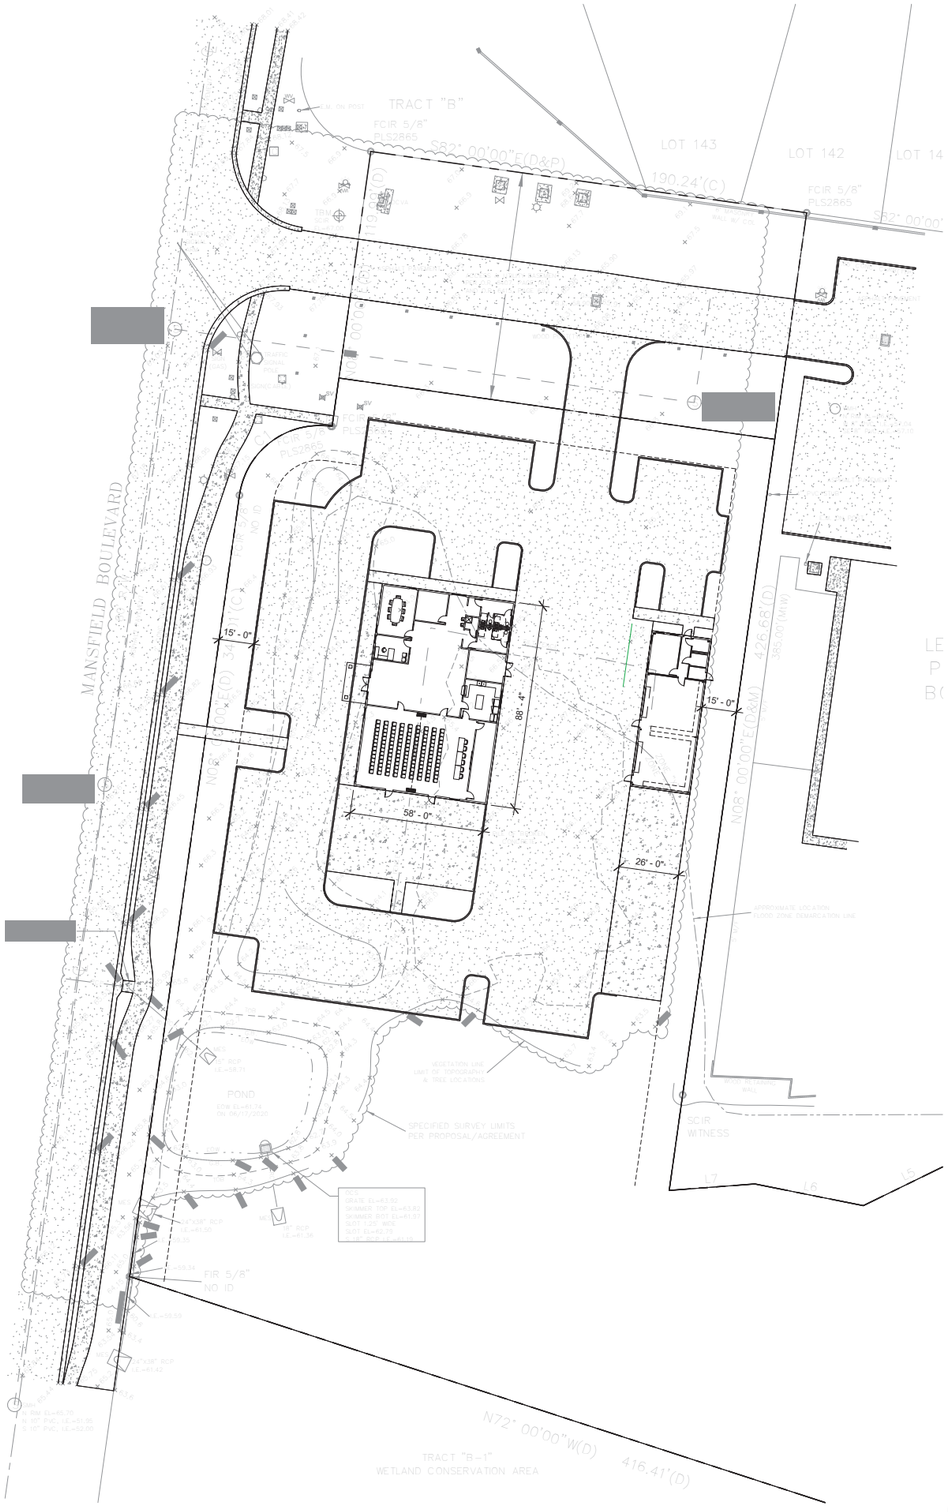

N 1 A1.0 **SITE PLAN**
1" = 30'-0"

REP
RENKER EICH PARKS ARCHITECTS

SCHEMATIC DESIGN

NEW COMMUNITY BUILDING AND FACILITIES
MAINTENCE AND STORAGE BUILDING

MEADOW POINTE II COMMUNITY BLDG.

MANSFIELD BLVD.& COUNTY LINE RD. - SE CORNER. WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543


MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT
WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

PROJECT NO.:2421.01
DATE: 06/24/2026
DRAWN BY:YS
REVISIONS:

SHEET TITLE:
SITE PLAN

SHEET NO.:
A1.0


8/28/2026 1:29:54 PM
Autodesk Docs://2421.01 MPII Community Hall & Facilities Maintenance/2421.01 - MPII CDD PEMB Meeting Hall & Facilities Maintenance.rvt

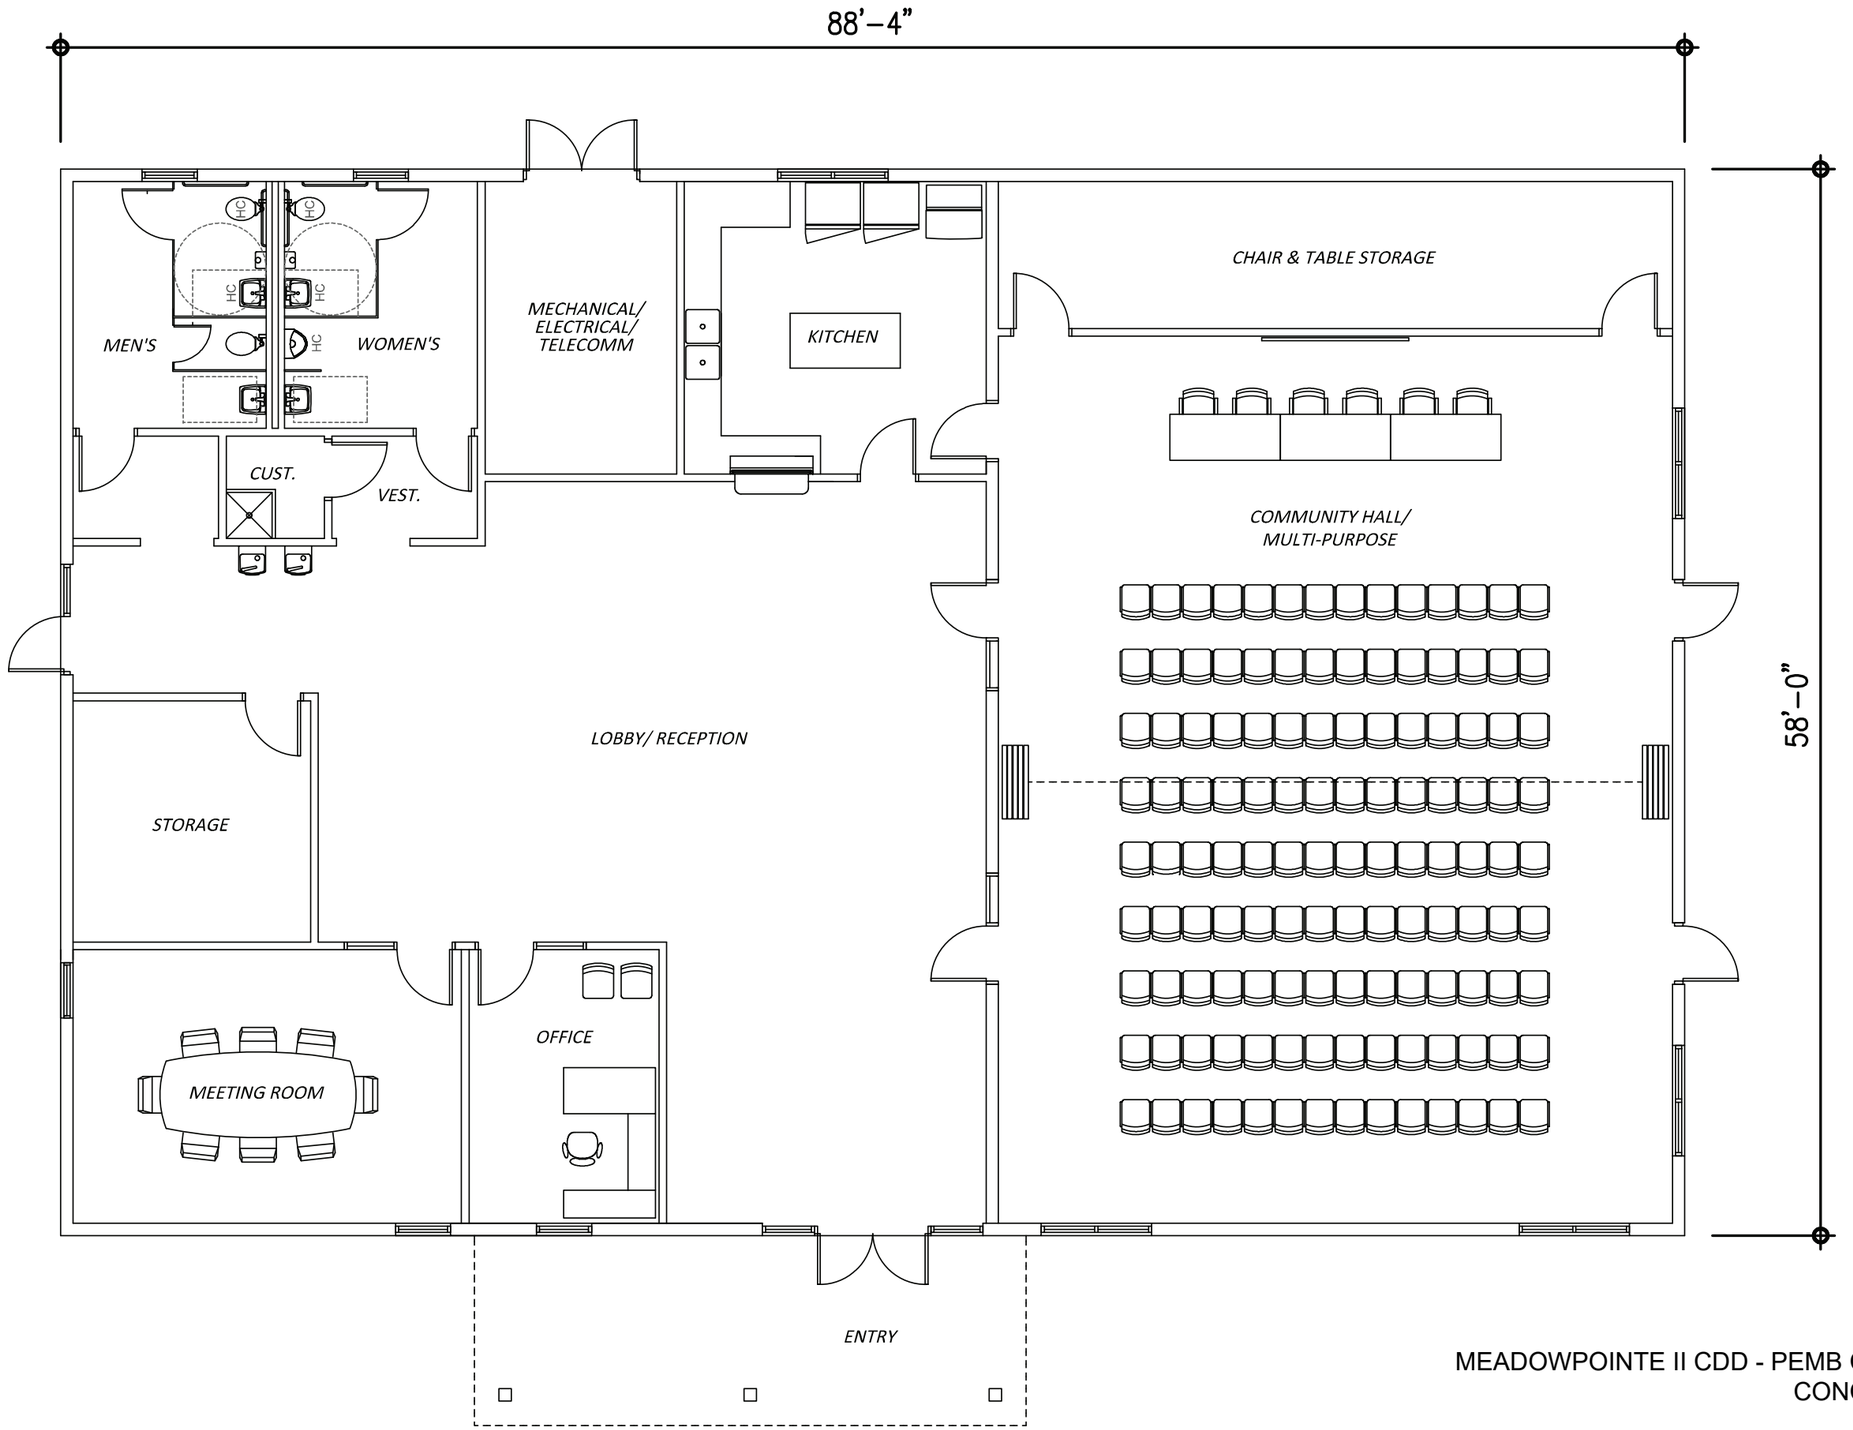


MEADOWPOINTE II CDD - PEMB COMMUNITY HALL
CONCEPTUAL SKETCH
FLOOR PLAN
08/28/2026




MEADOWPOINTE II CDD - PEMB COMMUNITY HALL
CONCEPTUAL SKETCH
WEST ELEVATION
08/28/2026

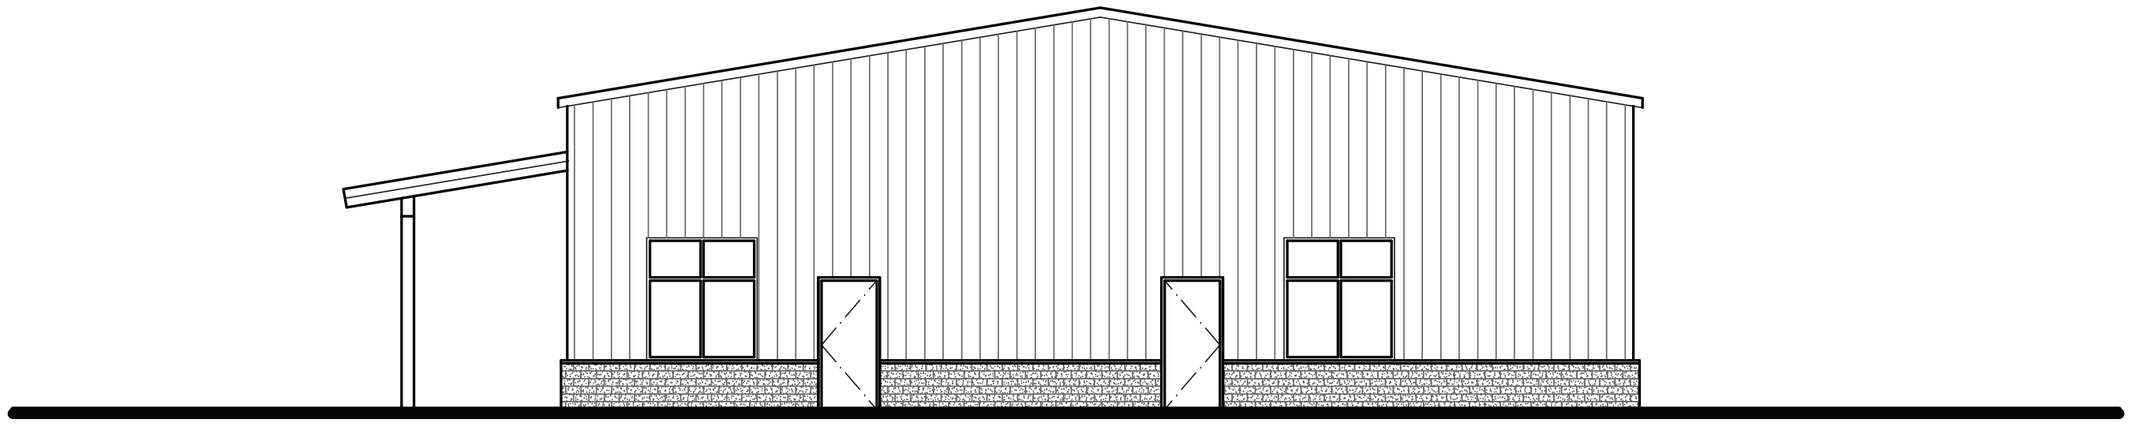

MEADOWPOINTE II CDD - PEMB COMMUNITY HALL
CONCEPTUAL SKETCH
SOUTH ELEVATION
08/28/2026

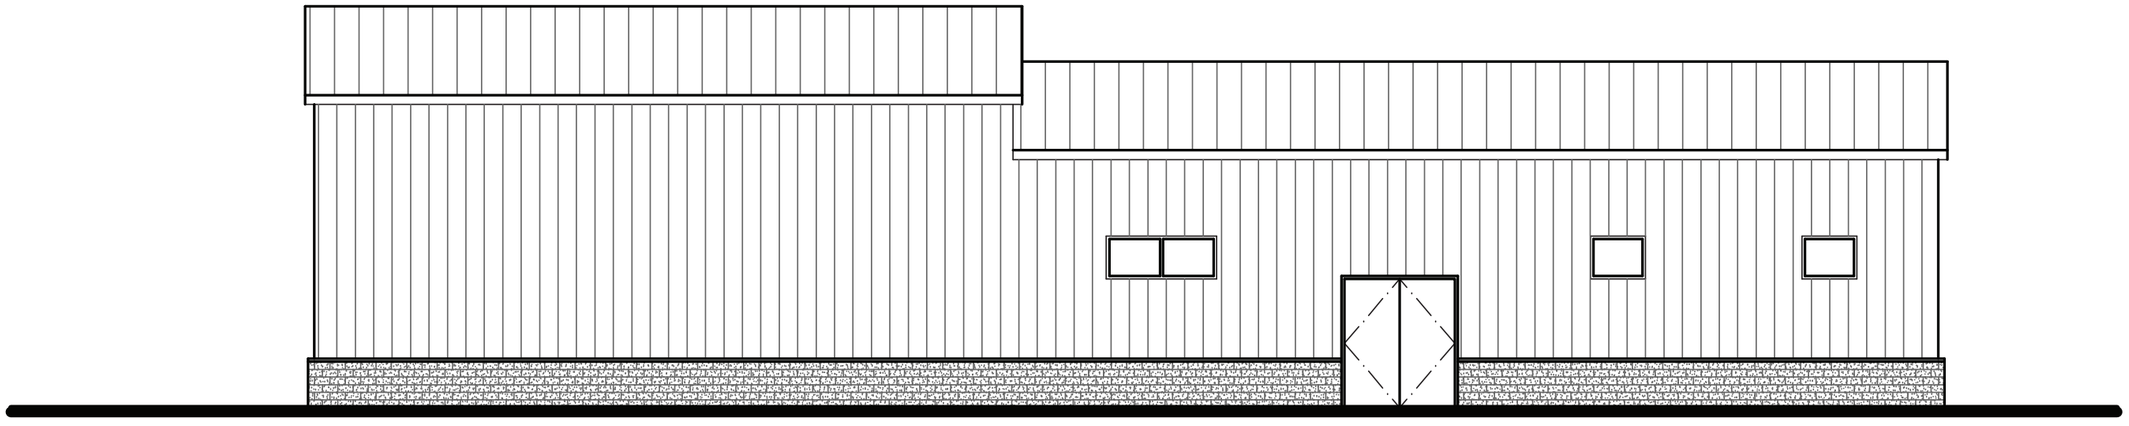


MEADOWPOINTE II CDD - PEMB COMMUNITY HALL
CONCEPTUAL SKETCH
EAST ELEVATION
08/28/2026

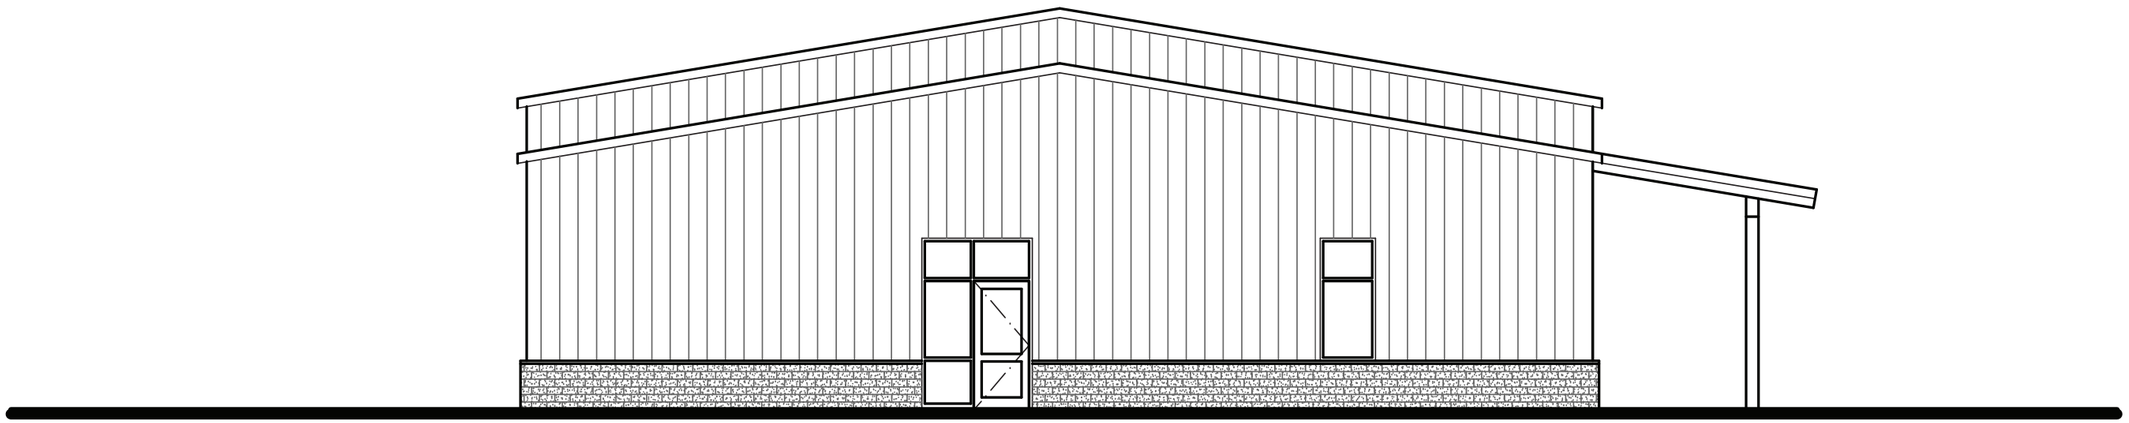


MEADOWPOINTE II CDD - PEMB COMMUNITY HALL
CONCEPTUAL SKETCH
NORTH ELEVATION
08/28/2026

SPECIFIC NOTES

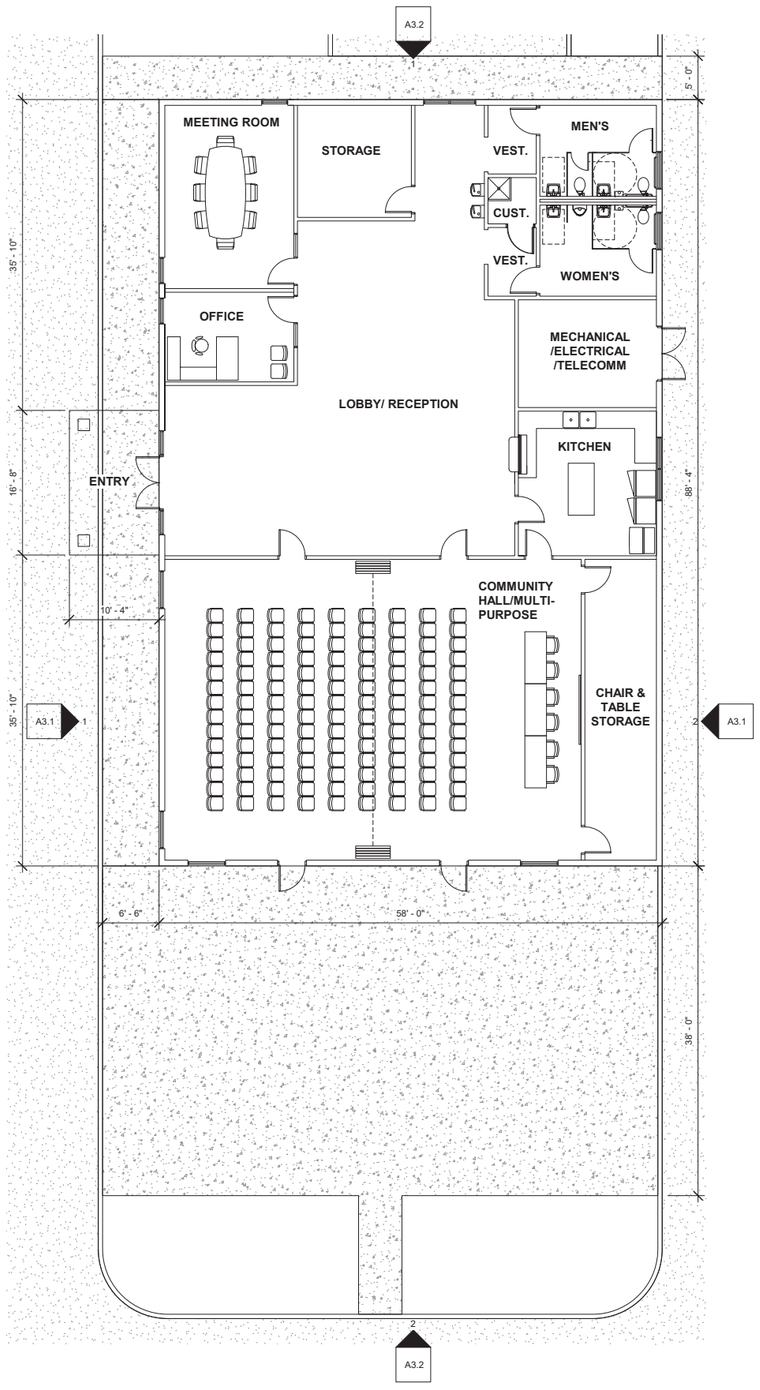

2 A1.1 **MEETING HALL FLOOR PLAN**
1/8" = 1'-0"

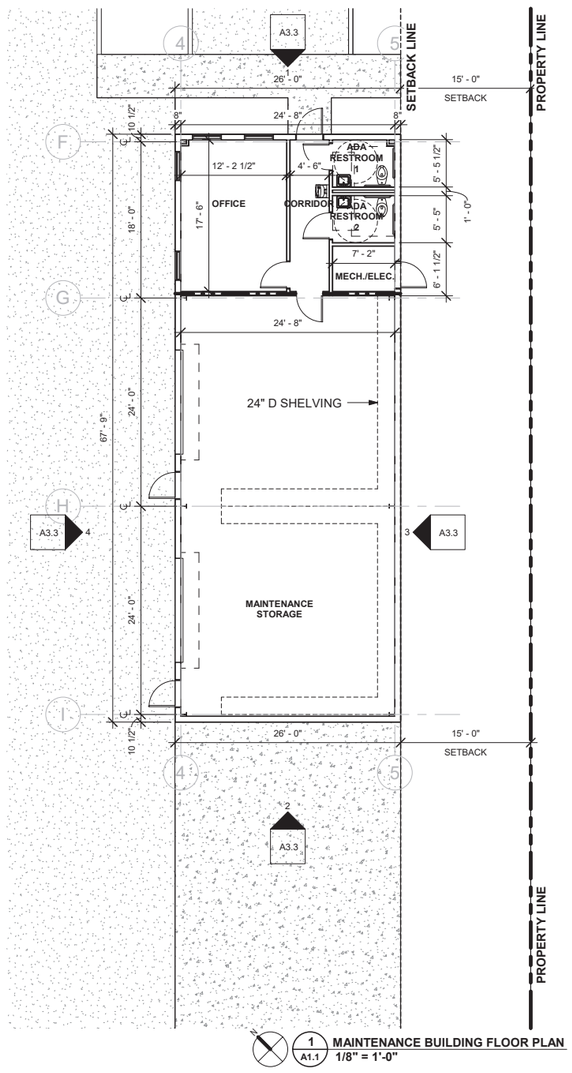

1 A1.1 **MAINTENANCE BUILDING FLOOR PLAN**
1/8" = 1'-0"

SCHEMATIC DESIGN

NEW COMMUNITY BUILDING AND FACILITIES
MAINTENCE AND STORAGE BUILDING

MEADOW POINTE II COMMUNITY BLDG.

MANSFIELD BLVD & COUNTY LINE RD - SE CORNER. WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543


MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT
WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

PROJECT NO.:2421.01
DATE: 06/24/2026
DRAWN BY:YS
REVISIONS:


SHEET TITLE:
FIRST FLOOR PLANS

SHEET NO.:
A1.1


8/28/2026 1:30:12 PM
Autodesk Docs://2421.01 MPII Community Hall & Facilities Maintenance/2421.01 - MPII CDD PEMB Meeting Hall & Facilities Maintenance.rvt

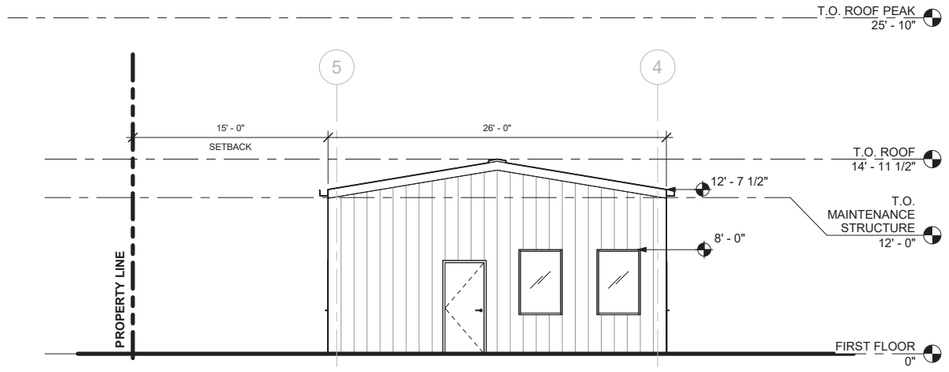


1 A3.3 **MAINTENANCE BUILDING - NORTH ELEVATION**
3/16" = 1'-0"

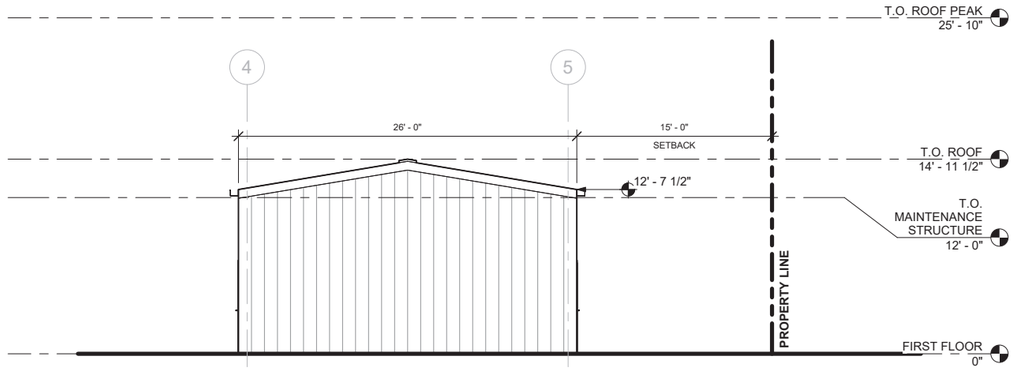

2 A3.3 **MAINTENANCE BUILDING - SOUTH ELEVATION**
3/16" = 1'-0"

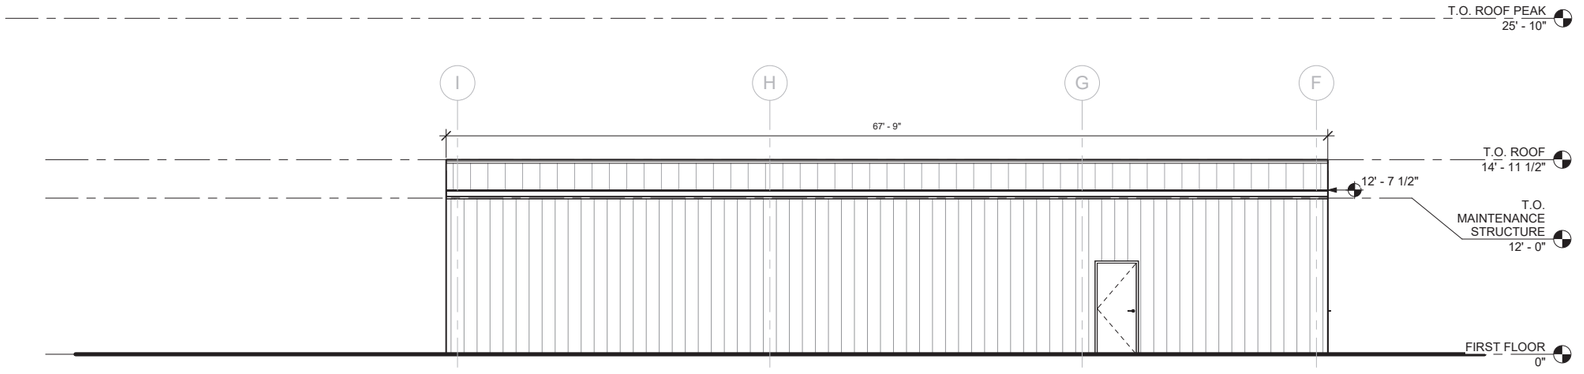

3 A3.3 **MAINTENANCE BUILDING - EAST ELEVATION**
3/16" = 1'-0"

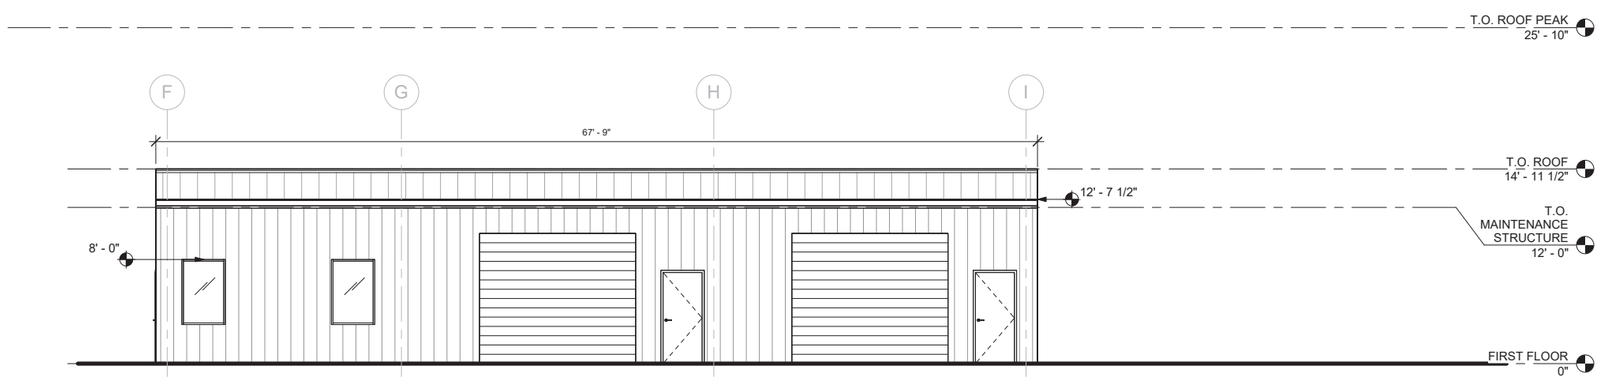

4 A3.3 **MAINTENANCE BUILDING - WEST ELEVATION**
3/16" = 1'-0"

SPECIFIC NOTES

SCHEMATIC DESIGN

NEW COMMUNITY BUILDING AND FACILITIES
MAINTENCE AND STORAGE BUILDING

MEADOW POINTE II COMMUNITY BLDG.

MANSFIELD BLVD & COUNTY LINE RD - SE CORNER, WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

MEADOW POINTE II COMMUNITY DEVELOPMENT DISTRICT
WESLEY CHAPEL, PASCO COUNTY, FLORIDA 33543

PROJECT NO.:2421.01
DATE: 06/24/2026
DRAWN BY:YS
REVISIONS:

SHEET TITLE:
MAINTENANCE BUILDING EXTERIOR ELEVATIONS

SHEET NO.:
A3.3

8/3/2026 2:35:07 PM
Autodesk Docs://2421.01 MPII Community Hall & Facilities Maintenance/2421.01 - MPII CDD PEMB Meeting Hall & Facilities Maintenance.rvt

October 27th, 2026

Attn: John Picarelli, CDD Chairman
Meadow Pointe II Clubhouse
30051 County Line Rd.
Wesley Chapel, FL 33543
cc: Jayna Cooper

Re: Meadow Pointe II CDD – Multi-Purpose Community Bldg. & Facilities Maintenance Bldg. Professional Services Proposal – Schematic Design through Construction Administration

Dear John,

We are pleased to present this proposal for Professional Architectural & Engineering Services. The tasks that comprise the scope of work will provide Meadow Pointe II CDD with: Code Research/Geotech, Schematic Design, Design Development, Construction Documents, Bidding/Permitting Assistance, & Construction Administration. Services include digital Architectural Renderings, Public Meetings and Presentations, coordination with Construction Management team, and As-Built CAD & PDF Records at Close-Out.

Scope of Work:

New Site Development: Paving Grading, and Drainage. New Building Construction for a Multi-Purpose Community Hall & and a Facilities Maintenance Building. (Reference Scope of Work.)

Construction Budget: $3.95M ($3M Building, $950K Site Development)

Basic Services:

Architectural	$ 87,200
Civil Engineering	$ 50,000
Structural Engineering	$ 22.000
Mechanical Engineering	$ 19,000
Electrical Engineering	$ 16,800
Total Basic Services	$ 195,000

Basic Services Payment Schedule:

Code Research/ Planning	5%	$ 9,750
Schematic Design	15%	$ 29,250
Design Development	20%	$ 39,000
Construction Documents	30%	$ 58,500
Bidding Assistance	5%	$ 9,750
Permitting Assistance	5%	$ 9,750
Construction Administration	20%	$ 39,000
Total Basic Services Fee	**100%**	**$ 195,000**

AE Design Additional Service Allowance (5%): $ 9,750

Scheduled Additional Service Allowances (As Needed):

Geotechnical Services (Lump Sum)	$ 9,100
Civil – Surveying (Hourly NTE)	$ 6,500
Civil – Landscape Design (Lump Sum)	$ 6,000
Civil – Record As-Built Drawings (Hourly NTE)	$ 8,000

Total Scheduled Additional Services Allowances: **$ 29,600**

Reimbursable: Printing & Shipping Allowance: **$ 5,000**

Total Basic Services, AE Design Allowance, Scheduled Additional Service Allowance, & Reimbursable Allowance **$ 239,350**

Exclusions:

Exclusions shall include all A/E Services not specifically included in this proposal.

Owner Provided Items:

Environmental Report Records, Survey Records, Landscape Design

Deliverables

Drawings: PDF files, CAD DWG files, Renderings
Specifications: PDF files, Word files
Energy Calculations, Reports
Signed & Sealed Permit Sets

Design Schedule:

Code Research/ Planning/ Geotechnical	42 Days
Schematic Design	28 Days
Owner & CM Review	14 Days
Design Development	28 Days
Owner & CM Review	14 Days
SWFWMD Submittal	90 Days
Construction Documents	28 Days
Owner & CM Review	14 Days
Bidding Assistance	(TBD)
Permitting Assistance	(TBD)
Construction Administration	(TBD)

Community/ Board Meetings (4 Meetings)
Construction Meetings/ Site Visits (12 Visits)
Substantial Completion (1 Visit)
Final Inspection (1 Visit)

Architect/AE Team Lead Point of Contact Information:

Renker Eich Parks Architects, Inc., 1609 Dr. Martin Luther King Jr. St. N., St. Petersburg, FL 33704
Paul C. Palmer, AIA, Principal in Charge (727) 821-2986 x212, ppalmer@reparch.com

Consulting Engineers Point of Contact Information:

Civil Engineering
Hamilton Engineering & Surveying, LLC, 3409 W. Lemon St., Tampa, FL 33609
Lucas Carlo, P.E., Principal in Charge (813) 250-3535, lucasc@hamiltonengineering.com

Geotechnical Engineering Services
Tierra, Inc., Temple Terrace Highway, Tampa, FL 33637
Tyler R. Jean, P.E., Principal in Charge (813) 989-1354, tjean@tierraeng.com

Structural Engineering
Miller Structural Engineering, Inc., 320 W. Kennedy Blvd., Suite 700, Tampa, FL 33606
Walter W. Miller, P.E., Principal in Charge (813) 259-9116, wmiller@millerstructural.com

Mechanical, Plumbing, & Fire Protection Engineering
BAL Engineering, Inc.,154A Whitaker Rd., Lutz, FL 33549
Bryant A. Lyle, P.E., Principal in Charge (813) 333-2103 x101, bryant_lyle@balengineering.com

Electrical & Telecomm Engineering
MPS Engineering, Inc., 240 Pine Ave. North, Oldsmar, FL 34677
Scott Roper, P.E., Principal in Charge (813) 855-2721, scottr@mpseng.com

We appreciate this opportunity to work with Meadow Pointe II CDD.
If you have any comments or questions please do not hesitate to contact us.

Sincerely,
Renker Eich Parks Architects



Paul C. Palmer, AIA, LEED AP, Principal

Attachments: REPA 2026 Hourly Rates
Scope of Work
Consulting Engineering Services Proposals

RENKER EICH PARKS ARCHITECTS INC.

Personnel Category Rates - 2026

Principal	**$ 205.00 / Hour**
Project Architect	**$ 195.00 / Hour**
Project Manager	**$ 185.00 / Hour**
Architect	**$ 175.00 / Hour**
Specification Writer	**$ 155.00 / Hour**
Cost Estimator	**$ 145.00 / Hour**
Arch. Graduate/Intern	**$ 95.00 / Hour**
CADD Designer/Draftsperson	**$ 85.00 / Hour**
Junior Designer/Draftsperson	**$ 75.00 / Hour**
Administrative / Clerical	**$ 65.00 / Hour**

TIERRA

October 13, 2026

Renker Eich Parks Architects, Inc.
1609 Dr Martin Luther King Jr St N
St. Petersburg, FL 33704

Attention: Paul C. Palmer, AIA, Principal

RE: Geotechnical Engineering Services Proposal
Meadow Pointe II CDD
Pasco County, Florida
Tierra Proposal No. 65-26-704

Mr. Palmer:

Tierra, Inc. (Tierra) appreciates the opportunity to submit the attached proposal to provide geotechnical engineering services for the subject project.

Project Information

The proposed project consists of preparing construction plans for proposed new community hall and maintenance facilities for the Meadow Pointe community in Pasco County, Florida. The project site is located on the southeast corner of the intersection of Mansfield Boulevard and County Line Road. Based on the provided information, we understand the project will include new approximate 4,000 square foot and 2,000 square foot building structures with drainage and pavement improvements. This proposal addresses the geotechnical services for the new structures, drainage, and pavement improvements areas only.

This proposal is based on the project site being accessible to our standard geotechnical equipment.

Scope of Services

The objective of our study will be to evaluate existing soils and groundwater conditions and provide geotechnical evaluation and recommendations with respect to the structures and pavement areas associated with the project.

In order to meet the preceding objectives, we propose to provide the following services:

1. Conduct a visual site reconnaissance of the project site and locate and coordinate utility clearance.

2. Perform a geotechnical field study for the proposed development consisting of borings, subsurface sampling, and field testing. We plan to perform the following:

    a. Perform one (1) Standard Penetration Test (SPT) boring to a depth of 20 feet below existing grades and a Double Ring Infiltration Tests (DRIT) within the proposed pond location.

    b. Perform six (6) SPT borings within the anticipated structure footprints. Two (2) of the borings will be carried to a depth of competent limestone (an estimated depth of 50

feet). The remaining borings will be completed to depths of 30 feet below existing grades

c. Perform five (5) hand auger borings to depths on the order of 5 to 7 feet below existing grades within new proposed access drive and parking areas.

d. Perform one (1) pavement core boring within the existing pavement section. Perform a hand auger boring within the pavement core boring and document pavement, base and sub-grade conditions. At each core location, Tierra will record pavement/base layer thickness, asphalt types, subgrade material and depth, and provide pavement condition assessments. The core holes will be filled and asphalt patched upon completion of the pavement core and auger boring.

3. Measure the groundwater level at the boring locations. Estimate the seasonal high groundwater levels for the project.

4. Visually classify and stratify all recovered soil samples in the laboratory using the Unified Soil and AASHTO Classification Systems.

5. Prepare an engineering report which summarizes the course of study pursued, the field and laboratory data generated, the subsurface conditions encountered and our recommendations.

Service Fee

We propose a lump sum fee of **$9,100.00** for the geotechnical services associated with the proposed improvements.

By signing the next page, you hereby authorize Tierra, Inc. ("TIERRA") to proceed with services outlined in this proposal or requested by you and agree that all services and anything arising out of or in any way related to this proposal will be governed by TIERRA's General Conditions which are attached hereto and are incorporated herein by reference. This authorization to proceed constitutes an agreement between you and TIERRA and is made in consideration of the mutual promises and covenants contained herein and for other good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged.

We appreciate the opportunity to offer our services to you. Should you have any questions regarding this proposal, please do not hesitate to contact this office.

Respectfully Submitted,

TIERRA, INC.

Tyler R. Jean, P.E.
Geotechnical Engineer

Thomas E. Musgrave, P.E.
Geotechnical Engineer

Attachments:
Tierra General Conditions

By signing below, you hereby authorize Tierra, Inc. ("TIERRA") to proceed with services outlined in this proposal or requested by you and agree that all services and anything arising out of or in any way related to this proposal will be governed by TIERRA's General Conditions which are attached hereto and are incorporated herein by reference. This authorization to proceed constitutes an agreement between you and TIERRA and is made in consideration of the mutual promises and covenants contained herein and for other good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged.

Thank you for the opportunity to submit this proposal. We look forward to working with you on this project. If you have any questions regarding this proposal, please contact the undersigned.

Authorized By:	Respectfully submitted,
Client	**Tierra, Inc.**
_____	_____

HAMILTON
ENGINEERING & SURVEYING, LLC

TAMPA OFFICE
3409 w. Lemon St
Tampa, Fl. 33609

SARASOTA OFFICE
8340 Consumer Cir
Sarasota, FL 34240

ORLANDO OFFICE
1717 Rio Grande Ave Ste100
Orlando, Fl. 32805

REPA Noted
10/26/26

October 8, 2026

Renker Eich Parks Architects
Attn: Paul Palmer, AIA LEED AP
1609 Dr. M.L.K Jr Street N.
St. Petersburg, Florida 33704
Phone: 727.821.2986
Email: pplamer@reparch.com

RE: Proposal for Civil Engineering Services

PROJECT: Meadow Pointe II
Community Hall and Maintenance Facility
Wesley Chapel, Pasco County, Florida

Dear Mr. Palmer:

Hamilton Engineering & Surveying, LLC(Hamilton) is pleased to propose civil engineering services for Renker Eich Parks Architects (Client) for the above referenced project. The scope of services is based on the construction of Community and Maintenance Buildings with associated parking as depicted on the conceptual plan prepared provided to Hamilton. Services proposed are based on an RFP, a preliminary meeting with your firm, and preliminary research by Hamilton and are described below:

BASIC SERVICES

1. Design Phase

HAMILTON will prepare construction plans of the development in accordance with Pasco County Land Development Code.

1) Design Development Construction Plans

HAMILTON will prepare site development construction plans based on the Pasco County PDPCPSW Permitting Process, and will include the following:

- Utility Plans
- Preliminary Plat
- Site Geometry
- Paving, Grading, and Drainage
- Construction Notes and Details

Lump Sum Fee: $17,000

2) Code Minimum Landscape Plans

HAMILTON will sub-consult Booth Design Group to prepare Permit Code Landscape Plans, including tree removal and replacement as required for review by Pasco County.

Lump Sum Fee: $6,000

Scheduled Allowance (Lump Sum)

2. Permitting

1) Pasco County Permitting and ROW Permitting

HAMILTON will prepare applications and process the PDPCPSW plans through Pasco County. Includes updating plans and responding to plan review comments along with coordinating any concerns between the design and the reviewers.

Lump Sum Fee: $12,000

2) SWFWMD ERP Permit

Prepare and submit to SWFWMD an Environmental Resource Permit application for stormwater quantity storage and water quality treatment permitting in accordance with Master Plan permit and the requirements of SWFWMD Chapter 40D-4 F.A.C.

Lump Sum Fee: $8,000

3. Construction Administration

1) Pre-Construction Conference

HAMILTON will organize and coordinate with relevant parties for a pre-construction meeting.

Lump Sum Fee: $1,000

2) Construction Observation/Administration

Typically includes the minimum participation required by the local regulatory agencies for a professional engineer and construction administration team (inspections, observation of site testing, etc.) for the construction phase. Also includes coordination of RFI's, shop drawing review and a final inspection (punch list) at project close out. See Attachment A for cost breakdown.

Lump Sum Fee: $9,000

3) Bid Assistance

HAMILTON will prepare an engineer's quantities estimate and assemble bid packages for the CDD bidding process.

Lump Sum Fee: $3,000

4) Record Drawings and Certification

Preparation of a record drawings based on survey data provided by others and certification by a professional engineer that the project was built in accordance with the approved plans.

Lump Sum Fee: $8,000

Scheduled Allowance (Hourly NTE)

TOTAL LUMP SUM FEE BASIC SERVICES: ~~$64,000~~ $50,000.00

Add Surveying (Boundary, Tree, & Topo)
Scheduled Allowance (Hourly NTE) - $6,000.00

REIMBURSABLE EXPENSES

The client shall reimburse Hamilton for all reasonable out-of-pocket expenses directly chargeable to the services provided in this contract at a rate of actual costs plus a handling charge of 15%. Reimbursable charges subject to this provision are as follows:

- Travel per allowable mile rate per current IRS mileage reimbursement allowance
- Copies/Scans
- Blackline prints
- Overnight postage/shipping
- Courier service
- Out-of-town Lodging/per diem

Not to Exceed: $3,000

ADDITIONAL SERVICES

The following services and/or fees are considered Additional Services and are not included in the price quoted herein under **BASIC SERVICES**. The following services can be provided on a time and material basis, or at a specified amount to be mutually agreed upon:

- Review and filing fees
- Determination of impact fees
- Rezoning or special use permitting
- Public hearings
- Overlay District reviews
- State of Florida Division of Historical Resources reviews
- Environmental assessment studies or reports
- Setback Enhancement Plan
- Restoration Plan (for temporary wetland impacts)
- Phase I Environmental Assessment
- Geotechnical reports or soils testing
- Sub-surface utility exploration (SUE)
- Landfill remediation design or permitting
- Wetland delineations, wetland surveys, impact and mitigation permitting, etc.
- Florida Department of Transportation (FDOT) permitting
- NPDES permitting
- Traffic analysis and/or traffic studies
- Design/coordination of "soft" utilities (gas, electric, power, cable, telephone)
- Design of off-site improvements
- Maintenance of Traffic (MOT) plans
- Large off-site drainage basin studies
- Phasing or bid alternates
- Property acquisition processes for right-of-way or otherwise
- Surveys
- Easement preparation
- Title search or ownership and encumbrance (O & E) reports
- Final platting
- Services involving threatened or endangered species
- Design of retaining walls
- Site electrical and/or site lighting design by an Electrical Engineer
- Dewatering plans or permitting
- Recurring client meetings or telephone conference calls during design or construction

- Bid process administration

SPECIFIC CONDITIONS

- Observation of site testing described under "Construction Administration" above does not include observation of re-testing due to failure. Any observation of re-testing due to failure will be provided as an additional service.

- This proposal assumes that an AutoCAD survey adequate for site design and permitting will be provided to Hamilton by others.

- This proposal assumes that survey information provided by the owner or client, for site design use, is correct and was performed with the benefit of a title search. Hamilton will not take responsibility for any information shown or not shown on the survey (i.e. easements) that affects the site design. Any site design changes required due to incorrect/missing items on the survey provided, will be performed as a negotiated additional service. Also, any title information provided and requested to be reviewed, will be performed as an additional service.

- This proposal assumes that geotechnical information adequate for site design and permitting will be provided to Hamilton by others.

- This proposal is made assuming utilities of adequate capacity exist on or directly adjacent to the subject site and such utilities are acceptable to serve the subject improvements. Design of off-site systems, treatment plants, lift stations, etc., if required, will be provided as a negotiated additional service.

- This proposal does not include the design of off-site roadway improvements, signalization improvements or other right-of-way improvements.

- The proposal assumes that current drainage basin and flood zone elevation information is available from public records without the requirement of additional off-site surveying and/or a large off-site drainage basin study, not typically required by the regulatory agencies. If a large off-site drainage basin study is required, it will be provided as a negotiated additional service.

- This proposal assumes no wetlands will be involved with the design effort. Wetland delineation, wetland line surveys, impact and mitigation plans, or other engineering associated with wetlands will be provided as a negotiated additional service.

- Should the Client require the solicitation of bids for the project or the review of initial bids, these services will be provided as a negotiated additional service.

- Submittal of the SWFWMD Statement of Completion assumes that the stormwater management system was completed significantly in accordance with the approved plans. Any deviations from the approved plans resulting in corrective action, re-inspection, re-submittal of record drawings and paperwork, etc., as required for SWFWMD approval will be provided as an additional service, based on hourly rates.

- In the event any utility provider requires an easement for any reason, we can provide this information as a negotiated additional service.

- This proposal does not include any services related to rezoning or comprehensive land-use amendments.

- Changes to the project resulting in reworking of drawings or calculations or change in the scope of work initiated by the Client will be performed as an additional service, based on hourly rates.

- ❖ Hamilton cannot guarantee the successful permitting of preliminary site plans. Many design constraints are based on the subjective interpretation of the various regulatory agencies and could render the proposed site design cost prohibitive or totally infeasible.

- ❖ All other additional engineering and surveying services will be billed according to the Hamilton Hourly Fee Schedule.

STANDARD GENERAL CONDITIONS

1) Payment of Invoices: Invoices are due and payable upon receipt. Delinquent accounts more than 30 days from date of invoice and will bear interest at the rate of 1-1/2% (one and one-half percent) per month and will constitute a breach of this Agreement allowing all remaining services to be terminated solely at the option of Hamilton Engineering & Surveying, LLC Notice of termination of service to be sent by certified mail, return receipt requested. Should it become necessary to collect unpaid invoices through lien process, an attorney or legal proceedings, the Client agrees to pay all costs of collections, including attorneys' fees in the lower court and appellate court. If the Client objects to an invoice, it must advise Hamilton in writing giving its reasons within 14 days of receipt of the invoice or the Client's objections will be waived, and the invoice shall conclusively be deemed due and owing. The Client agrees that the payment to Hamilton is not subject to any contingency or condition. Hamilton may negotiate payment of any check tendered by the Client, even if the words "in full satisfaction" or words intended to have similar effect on the check without such negotiation being an accord and satisfaction of any disputed debt and with prejudicing any right of Hamilton to collect additional amounts from the Client.
2) Termination: The obligation to provide further services under this Agreement may be terminated by either party upon five (5) calendar days' written notice in the event of a substantial failure, including but not limited to non-payment of invoices, by the other party to perform in accordance with the terms hereof through no fault of the terminating party. If any material change occurs in the ownership of the Client, Hamilton shall have the right to immediately terminate this Agreement. In the event of any termination, Hamilton shall be paid for all services rendered and expenses incurred to the effective date of termination, and other reasonable expenses incurred by Hamilton as a result of such termination. If Hamilton's compensation is a fixed fee, the amount payable for services will be a proportional amount of the total fee based on the ratio of the amount of the services performed, as reasonably determined by Hamilton to the total amount of service which were to have been performed.
3) Standard of Care: In performing its professional services, Hamilton will use that degree of care and skill ordinarily exercised, under similar circumstances, by reputable members of its profession in the same locality at the time the services are provided. No warranty, express or implied, is made or intended by Hamilton's undertaking herein or its performance of services, and it is agreed that Hamilton is not a fiduciary with respect to the Client.
4) Client Furnished Information: Hamilton Engineering & Surveying, LLC, will consider all up-front information supplied by the Client as accurate and correct. Additional work or work done over because of inaccurate or inadequate information supplied by the Client will be paid for as Additional Services.
5) Use of Documents: All documents, including but not limited to drawings, specifications, reports, and data or programs stored electronically, prepared by Hamilton are related exclusively to the services described in this Agreement, and may be used only if the Client has satisfied all of it obligations under this Agreement. They are not intended or represented to be suitable for use, partial use or reuse by the Client or others on extensions of this project or on any other project. Any modifications made by the Client to any of Hamilton's documents, or any use, partial use or reuse of the documents without written authorization or adaptation by Hamilton will be at the Client's sole risk and without liability to Hamilton, and the Client shall indemnify, defend and hold Hamilton harmless from all claims, damages, losses and expenses, including but not limited to attorneys' fees, resulting therefrom. Any authorization or adaptation

will entitle Hamilton to further compensation at rates to be agreed upon by the Client and Hamilton. Any electronic files not containing an electronic seal are provided only for the convenience of the Client, and use of them is at the Client's sole risk. In the case of any defects in the electronic files or any discrepancies between them and the hardcopy of the documents be prepared by Hamilton, the hardcopy shall govern. Only printed copies of documents conveyed by the Hamilton may be relied upon. Because data stored in electronic media format can deteriorate or be modified without Hamilton's authorization, the Client has 60 days to perform acceptance tests, after which it shall be deemed to have accepted the data.

6) Additional Services: If authorized by the Client, Hamilton Engineering & Surveying, LLC, will furnish Additional Services which are not considered normal or customary Basic Services. The cost for Additional Services provided by Hamilton Engineering & Surveying, LLC, personnel will be billed on a time and material basis. Additional Services provided by others will be billed directly to the Client by the Provider.

7) Reimbursable Expenses: The Client will pay Hamilton Engineering & Surveying, LLC, for the actual expenses incurred in connection with the project for commercial out-of-town travel and subsistence, shipping charges (i.e., FedEx, Express Mail, etc.), courier/delivery charges and printing/reproduction costs.

8) Controlling Law: This Agreement will be governed by the laws in the State of Florida and deemed to have been entered into in Hillsborough County, Florida. Exclusive venue and jurisdiction to determine all issues of interpretations and enforcement of this contract and any modifications thereto are in Hillsborough County, Florida and nowhere else.

9) Oral Agreements: No oral agreement, guarantee, promise, representation or warranty will be binding.

10) Limitation of Liability: In recognition of the relative risks and benefits of the Project to both the Client and Hamilton, the risks have been allocated such that the Client agrees, to the fullest extent of the law, and notwithstanding any other provisions of this agreement or the existence of applicable insurance coverage, that the total liability, in the aggregate, of Hamilton and Hamilton's officers, directors, employees, agents, and subconsultants to the Client or to anyone claiming by, through or under the Client, for any and all claims, losses, costs, or damages whatsoever arising out of, resulting from or in any way related to the services under this Agreement from any cause or causes, including but not limited to, the negligence, professional error or omissions, strict liability or breach of contract or any warranty, express or implied, of Hamilton or Hamilton's officers, directors, employees, agents and sub-consultants, shall not exceed the amount of our fee or $20,000.00 whichever is greater. Higher limits of liability may be negotiated for additional fee. Under no circumstances shall Hamilton be liable for lost profits or consequential damages, for additional cost or other consequences due to changed conditions, or for costs related to the failure of contractor to perform work in accordance with the plans and specifications. This Section 11 is intended solely to limit the remedies available to the Client, and nothing in this Section 11 shall require the Client to indemnify Hamilton. The Client agrees to limit any and all liability or claim for damages, cost of defense, or expenses to be levied against Hamilton Engineering & Surveying, LLC, by the Client or third parties to a sum not to exceed $20,000.00 or the amount of our fee, whichever is greater, on account of any design defect, error, omission, or professional negligence.

11) Dispute Resolution: All claims by the Client arising out of this Agreement or its breach shall be submitted first to mediation in accordance with the Construction Industry Mediation Rules of the American Arbitration Association as a condition precedent to litigation. Any mediation or civil action by Client must be commenced within one year of the accrual of the cause of action asserted but in no event later than allowed by applicable statues.

12) Construction Phase Services: If Hamilton's services include the preparation of documents to be used for construction and Hamilton is not retained to make periodic site visits, the Client assumes all responsibility for interpretation of the documents and for construction observation, and the Client waives any claims against Hamilton in any way connected thereto. If Hamilton provides construction phase services, Hamilton shall have no responsibility for any contractor's means, methods, techniques, equipment choice and usage, sequence, schedule, safety programs, or safety practices, nor shall Hamilton have any authority or responsibility to stop or direct the work of any contractor. Hamilton's visits will be for the purpose of endeavoring to provide the Client with a greater degree of confidence that the completed work of its contractors will generally conform to the construction documents prepared by Hamilton.

Hamilton neither guarantees the performance of contractors, nor assumes responsibility for any contractor's failure to perform its work in accordance with the contract documents. Hamilton is not responsible for any duties assigned to the design professional in the construction contract that are not expressly provided for in this Agreement. The Client agrees that each contract with any contractor shall state that the contractor shall be solely responsible for job site safety and for its means and methods; that the contractor shall indemnify the Client and Hamilton for all claims and liability arising out of job site accidents; and that the Client and Hamilton shall be made additional insureds under the contractor's general liability insurance policy.

13) No Third-Party Beneficiaries; Assignment and Subcontracting: This Agreement gives no rights or benefits to anyone other than the Client and Hamilton, and all duties and responsibilities undertaken pursuant to this Agreement will be for the sole benefit of the Client and Hamilton. The Client shall not assign or transfer any rights under or interest in this Agreement, or any claim arising out of the performance of services by Hamilton, without the written consent of Hamilton. Hamilton reserves the right to augment its staff with sub-consultants as it deems appropriate due to project logistics, schedules, or market conditions. If Hamilton exercises this right, Hamilton will maintain the agreed-upon billing rates for services identified in the contract, regardless of whether the services are provided by in-house employees, contract employees, or independent sub-consultants.

14) Confidentiality: The Client consents to the use and dissemination by Hamilton of photographs of the project and to the use by Hamilton of facts, data and information obtained by Hamilton in the performance of its services. If, however, any facts, data or information are specifically identified in writing by the Client as confidential, Hamilton shall use reasonable care to maintain the confidentiality of that material.

15) Authorization: The signature below authorizes the work herein described and does so on behalf of the Owner of the property in question and warrants that the Client has authority to sign this Agreement.

BASIS FOR PAYMENT

- Invoices for professional engineering services will be submitted monthly based on work completed to date or as directed by the Client's schedule for payments.

- All rates and fees are subject to renegotiation after a three-month period from the date of this proposal, if it has not been accepted by the Client. Hourly rates are subject to annual adjustment effective January 1st and may be revised accordingly on future proposals.

- In the event this agreement is terminated prior to completion of services, Hamilton will be compensated by the Client for all work accomplished to the point of termination in accordance with the fee structure stipulated herein.

ACCEPTANCE

We appreciate the opportunity to provide civil engineering services for you. If the defined scope of work and basis for payment are acceptable, this letter will serve as an agreement between Hamilton Engineering & Surveying, LLC and Renker Eich Parks Architects for the services contained herein. If the Client elects not to proceed with any of the services listed, the Client must notify Hamilton in writing. Please execute in the space provided and return to Hamilton Engineering & Surveying, LLC. We will not begin any work until a signed agreement is received. Thank you.

Sincerely,
Hamilton Engineering & Surveying, Inc.



Lucas Carlo, P.E.
Sr. Vice President

_____ _____

Paul Palmer, AIA Date

HAMILTON HOURLY FEE SCHEDULE

Job Title	2026 HAMILTON RATE TABLE
Civil Project Coordinator	$100.00
Drafting Technician	$105.00
Survey Technician	$105.00
Graphic Designer	$110.00
CA Field Representative	$115.00
Civil Technician	$115.00
Inspector	$120.00
Civil Designer	$125.00
Drafting Senior Designer	$125.00
Civil Project Engineer	$135.00
Survey Processor	$135.00
Civil Senior Designer	$150.00
Project Manager	$150.00
Civil Senior Project Engineer	$170.00
Survey Project Manager	$175.00
Survey Crew Chief	$185.00
2 - Person Crew	$200.00
Civil Senior Project Manager	$210.00
Senior Project Manager	$220.00
Senior Planner	$250.00
Survey Manager	$250.00
Survey Principal	$275.00
3- Person Crew	$280.00
Civil Principal	$300.00

MILLER STRUCTURAL ENGINEERING, INC.
320 W. Kennedy Blvd • Ste 700 • Tampa, Florida 33606 • 813-259-9116

September 21, 2026

Mr. Paul Palmer
Renker Eich Parks Architects
1609 9th Street North
St. Petersburg, Florida 33704

Re: Meadow Pointe II CDD Proposal

Dear Paul:

Thank you for considering Miller Structural Engineering for the Meadow Pointe II CDD PEMB project.

Based on our conversations the following is my understanding of the proposed buildings. The Community Hall building is approximately 5,123 sf. The Facilities Maintenance Building is approximately 1,765 sf. The buildings will consist of a Pre-Engineered Metal Building on conventional shallow foundations. The PEMB design will be delegated to the manufacturers Structural Engineer.
The following is the proposed scope of Structural Consulting Services.

1. Coordination Meetings.

2. Areas to be designed and detailed:
   - Conventional shallow foundation system
   - Slab on grade details
   - Saw cut control joint pattern

3. Provide ACAD format contract documents as follows:
   - General Notes and Schedules
   - Foundation Plans
   - Sections
   - Details

4. Specifications in 8-1/2” x 11” CSI format.

5. Construction Administration consists of the following:
   - Shop Drawing Review
   - RFI Processing
   - Three site visits during construction to review general conformance with the structural design intent.

Additional services will be billed at an hourly rate of $200.00/hr.

Based on the above scope of services, the Structural Engineering fee is as follows:

Structural Fee: $22,000

SD = 15% = $3,300
DD = 20% = $4,400
CD = 40% = $8,800
CA = 25% = $5,500

Note: If this proposal is acceptable and no written contracts are executed, this letter will become the Architect/Consultant Agreement for Professional Services based on the Terms and Conditions of the AIA Document C401 "Standard Form of Agreement Between Architect and Consultant".

I look forward to the possibility of working together on this project. If you have any questions, please call.

Sincerely:



Walter W. Miller, P.E.

Accepted:

Renker Eich Parks Architects

154A Whitaker Road
Lutz, FL 33549
Phone: 813-333-2103
Registry No: 31211
Admin@BALEngineering.com

October 12, 2026

Renker Eich Parks Architects, Inc.
1609 Martin L. King Jr. Drive North
St. Petersburg, Florida 33704

Attention: Mr. Paul Palmer, AIA, Principal

Re: M&P Engineering Services for Meadow Pointe Community Hall & Maintenance Building

Paul,

Per your request, the following is our proposal for M&P engineering services for the new Meadow Pointe Community Hall and Maintenance Building in Wesley Chapel Florida.
The general scope of work is based on your recent emails and preliminary concept sketches:

Provide M&P engineering services as described below:

1. Community Hall (58' x 88', ~5,100 Sq Ft) - PEMB.
2. Maintenance Storage (26' x 68', ~1,770 Sq Ft) - PEMB.

HVAC: Perform cooling load calculations to verify cooling requirements for each building.
Design split DX-system(s) or ground mounted packaged units with 100% OAU to serve the Community Hall. Design split DX system for Maintenance Office.
Ventilate the Maintenance Storage areas only, no AC.
Design general exhaust systems for restrooms, storage areas and kitchen, etc.

Plumbing: Design DWV and domestic hot and cold-water systems for the restrooms and kitchen.
Design domestic water heating system to serve lavatories, sinks and service sink.
Design domestic water service for hose bibbs in the Maintenance storage area(s).
Extend the DWV and domestic water systems 5 feet outside of building for connection to Civil.

Fire Protection: Performance based design in accordance with Florida Administrative Rule Chapter 61G15-32 Responsibility Rules of Professional Engineers concerning the design of fire protection systems. Coordinate fire sprinkler riser location and sprinkler head layouts in accordance with NFPA 13.

General Services

- All required building Revit models, background drawings and site plans shall be provided by Renker Eich Parks Architects.
- All designs shall comply with the 2023/2026 Florida Building Code.

- M, P & FP Deliverables include:
    - Code research and program development.
    - Schematic Design (Narrative only)
    - Design Development
    - 100% Construction Documents
    - Provide (3) sets Signed and Sealed M&P plans, sheet specifications and Florida Energy Efficiency Code Report for permitting.
- Construction Administration which includes submittal and shop drawing review, bid & permit assistance and office base responses to RFIs.
- Per our discussion, provide **four (4) construction meetings/site visits** during construction which includes one (1) Substantial Completion or Final Completion Inspection in the base bid.

Services **NOT** included in this proposal:

- Changes to the Scope of Work described within.
- Civil or Site design work.
- AC design for Maintenance Storage areas.
- Kitchen hood exhaust system design.
- Sanitary grease system, including grease interceptors for kitchen.
- Sanitary oil separation system for Maintenance areas.
- Fuel Gas system design.
- Fluid distribution systems.
- Code updates required if permitted after 12/31/26.
- Construction site visits. Site visits to be billed at $600.00 per visit per discipline.
- Direct expenses (Additional printing or reproduction of documents, shipping, courier cost, etc.). These items will be identified and listed separately on our invoices.
- As-built documents to be billed at our standard hourly rates shown below.

Our proposed M&P engineering fee for the above-mentioned services is:

HVAC and Plumbing Design	$ 13,000.00
Fire Sprinkler Design	$ 2,000.00
Bid/Permit/Construction Administration	$ 1,600.00
Site Visits (Qty = 4) during construction	$ 2,400.00
TOTAL	**$ 19,000.00**

If additional services are requested, we will perform the services at our standard hourly rates per the following:

Principal (Registered PE):	$195.00/Hr.
Engineer/Project Manager:	$170.00/Hr.
Designer:	$140.00/Hr.
CAD Operator:	$ 90.00/Hr.
Administrative:	$ 70.00/Hr.

If a definite scope of work is determined for the additional services, we can provide a fee quotation for the work. We will need written authorization for additional services.

We appreciate the opportunity to be of service and look forward to working with you on this project. If you have any questions or concerns regarding this proposal do not hesitate to call or email. If you find this proposal acceptable, please sign below and return (1) original to BAL Engineering, Inc.

Sincerely,



Bryant A. Lyle, P.E.
President

_____
Authorized Signature (Date)

MPS ENGINEERING
240 Pine Ave. North
Oldsmar, FL 34677
MPS ENGINEERING
www.mpseng.com
813.855.2721

PROPOSAL

Date: **10/12/2026**
To: **Paul Palmer, REP Arch**
From: **Edward Wolanin, PE**
RE: **Medow Pointe II – Community Hall & Maintenance Facility**
MPS Job No: **Proposal**

Dear Paul,

Thank you for sending the information on this project to us for our proposal. We are looking forward to working with you to make this a successful project. Services being provided are for the scope as indicated in email correspondence to our office on 9/18/2026 and associated preliminary plans provided to us.

Scope:
The proposed scope of work includes the electrical engineering services needed for the design of a new 5,100 square foot, 1-story, PEMB community hall building and an 1,800 square foot, 1-story, PEMB Maintenance building at the Meadow Pointe II Community in Pasco County, Florida. The scope includes

Construction Document Services:

- Design of code-compliant lighting controls – this will be a combination of room-based occupancy sensors, lighting control panels, and daylight harvesting sensors where required
- Lighting fixture selections and layout
- Emergency egress lighting fixture selection and layout
- Electrical power distribution from new electrical service
- Coordination with power company for new electrical service
- Receptacle power
- Coordination of power for owner equipment
- Coordination of power for warming kitchen equipment
- Fire alarm system
- Low voltage systems to include a box and conduit to accessible ceiling space. Locations as directed by owner or owner's representative(s).
- Coordination of HVAC equipment power
- Building lightning protection system
- Site lighting design building-mounted fixtures and some pole lighting for parking areas
- Electrical specifications for the design provided
- Attend necessary virtual design meetings with Architect and design team
- Printed or electronic signed and sealed copies of drawings and specs for submission to building department for permit submittal. Additional printing to be billed per sheet.

Construction Administration Services:

- Assist during bidding, bid evaluation, and subcontractor selection
- Submittal and shop drawing review
- RFI response and communications
- 4 site visits (3 during construction and one final walkthrough)

Coordination:

- Your office to provide Architectural CAD files (Revit model) for our use
- Revit modeling and dimensioning of equipment to be performed for the purpose of space allocation and coordination between trades. Exact finishes, colors, etc. of modeled elements may not match what is specified. If more extensive modeling is required, we can provide a fee proposal for this work.

- Owner's Representative for the following trades shall provide information to our office for coordination: Interior Design, Landscape Architect, Civil Engineer, Kitchen Consultant, AV/Theatrical Equipment, etc. All equipment needing an electrical connection shall be provided to our office in schedule form, with an associated floorplan showing equipment tags, that includes all necessary electrical data such as voltage, phase, amperage load, mounting height, plug type, etc.

Excluded Services in This Proposal:

- Value Engineering after delivery of final Construction Documents. We will assist in developing add/deduct alternates prior to bid
- Changes to the scope of work resulting from unforeseen field conditions or as requested by the owner
- Changes to the design based on contractor product selections not in basis of design. Including, but not limited to, selective breaker coordination, HVAC equipment selections, lighting fixture selections, fire alarm, etc.
- Audio/Video systems design including security camera and wireless access point locations and selections
- Design of any systems not listed above
- Considerations for EV charging (either installed or preparation for future installation)
- Design of alternative energy source systems (PV, Wind, etc..)
- Reproduction of documents beyond those explicitly included herein
- Detailed opinions of probable construction costs
- Additional site visits as requested by the owner or required by the contractor's failure to comply with the contract documents, codes, or to meet the construction schedule
- Life Cycle cost analysis
- Building commissioning services
- Any structural engineering services needed for securing equipment due to wind or seismic events
- Any acoustical engineering services
- Production of Record Documents or As-Built Drawings at completion of construction

Based on these assumptions and on the preliminary information provided by your office, please consider the following fee proposal.

Discipline / Task Description	Fee Amount
Schematic Design Phase	$ 2,500.00
Design Development Phase	$ 4,500.00
Construction Document Phase	$ 6,000.00
Construction Admin – Shop Drawings/Bid/RFI/Site Visits Including Travel Expenses	$ 3,800.00
Total Fee for Electrical Engineering Services	**$ 16,800.00**

Additional pre-authorized site visits will be performed for a fee of $600 per visit.

Additional Expenses:
Unless already included in above base proposal, all direct expenses for printing, shipping, courier service, travel outside of the Tampa Bay area, preparation of electronic files for contractor or vendor use and other expenses incurred on behalf of the owner shall be reimbursable at cost unless otherwise noted. These items will be identified and listed separately on our invoices.

Additional Services:
If additional services are requested, we will perform the services requested at our standard hourly rates. Our rates for this project are stated below. If a definite scope of work is determined for the additional service, we can provide a fee quotation for the work. We will need written authorization for additional services before we proceed.

Principal	$225.00/hour	Designer	$140.00/hour
Professional Engineer	$200.00/hour	CAD Technician	$90.00/hour
Project Manager	$160.00/hour	Clerical/Admin	$70.00/hour

Terms and Conditions:
MPS Engineering, Inc. shall perform the services outlined in this proposal/agreement for the stated fee arrangement.

Access to Site:
Unless otherwise stated, MPS Engineering, Inc. will have access to the site for activities necessary for the performance of the services. MPS Engineering, Inc. will take precautions to minimize damage due to these activities, but has not included in the fee the cost of restoration of any resulting damage.

Dispute Resolution:
Any claims or disputes made during design, construction, or post-construction between the Client and MPS Engineering, Inc. shall be submitted to non-binding mediation. Client and MPS Engineering, Inc. agree to include a similar mediation agreement with all contractors, sub-contractors, sub-consultants, suppliers, and fabricators, thereby providing for mediation as the primary method for dispute resolution between all parties.

Billings / Payments:
Invoices for MPS Engineering, Inc.'s services shall be submitted, at MPS Engineering, Inc.'s option, either upon completion of such services or on a monthly basis. Invoices shall be payable within 30 days after the invoice date. If the invoice is not paid within 30 days, MPS Engineering, Inc. may, without waiving any claim or right against the Client, and without liability whatsoever to the Client, terminate the performance of the service. Retainers shall be credited on the final invoice.

Late Payments:
Accounts unpaid 60 days after the invoice date may be subject to a monthly service charge of 1.5% (or the legal rate) on the then unpaid balance. In the event any portion or all of an account remains unpaid 90 days after billing, the Client shall pay all costs of collection, including reasonable attorney's fees.

Indemnification:
The Client shall, to the fullest extent permitted by law, indemnify and hold harmless MPS Engineering, Inc., his or her officers, directors, employees, agents and sub-consultants from and against all damage, liability and cost, including reasonable attorney's fees and defense costs, arising out of or in any way connected with the performance by any of the parties above named of the services under this agreement, excepting only those damages, liabilities or costs attributable to the sole negligence or willful misconduct of MPS Engineering, Inc.

Certifications:
Guarantees and Warranties: MPS Engineering, Inc. shall not be required to execute any document that would result in it certifying, guaranteeing, or warranting the existence of conditions whose existence MPS Engineering, Inc. cannot ascertain.

Limitation of Liability:
In recognition of the relative risks, rewards, and benefits of the project to both the Client and MPS Engineering, Inc., the risks have been allocated such that the Client agrees that, to the fullest extent permitted by law, MPS Engineering, Inc., total liability to the Client for any and all injuries, claims, losses, expenses, damages or claim

expenses arising out of this agreement from any cause or causes, shall not exceed the value of this contract. Such causes include, but are not limited to, MPS Engineering, Inc., negligence, errors, omissions, strict liability, breach of contract or breach of warranty.

Termination of Services:
This agreement may be terminated by the Client or MPS Engineering, Inc. should the other fail to perform its obligations hereunder. In the event of termination, the Client shall pay MPS Engineering, Inc., for all services rendered to the date of termination, all reimbursable expenses, and reimbursable termination expenses.

Ownership of Documents:
All documents produced by MPS Engineering, Inc. under this agreement, shall remain the property of MPS Engineering, Inc., and may not be used by the Client for any other endeavor without the written consent of MPS Engineering, Inc.

Authorization to proceed, whether or not this proposal is signed and returned, constitutes acceptance of the terms listed herein.

If you have any questions about this proposal or about any of our assumptions, please call me at your convenience to discuss them. Thank you once again for your consideration.

Sincerely,

Edward Wolanin, PE
Principal / Electrical Engineer

Accepted By:

_____ _____
(Signature) (Date)

_____
(Printed Name/Title)

Tab 2

MEADOW POINTE II CDD

ENGINEERS REPORT FOR NOVEMBER 4th 2026 BOARD MEETING

Discussion items:

New Building Construction – The following is the latest information from the last project team meetings on 10/23/26.

The project architect has received proposals from all required engineering subconsultants and is preparing a consolidated design services agreement for the District's review. The scope includes architectural and engineering design, geotechnical investigations, and necessary permitting through Pasco County and SWFWMD.

The project team also discussed the existing stockpile of recycled concrete currently stored within the proposed construction area. Coordination is ongoing to evaluate temporary relocation options or potentially prioritize construction of the proposed storage bins to accommodate the material.

Following approval of the design agreement, geotechnical investigations are expected to begin within approximately three to four weeks. The architect will also establish an updated design schedule and coordinate with AD Morgan on the anticipated construction timeline.

Next Steps:

Review and finalize the architect's design services agreement.
Coordinate relocation or storage of the recycled concrete material.
Initiate geotechnical investigations following authorization.
Establish an updated design and construction schedule.

Lap Pool Construction – The following is the latest information from the last project team meeting on 10/23/2026. The next project team meeting is scheduled for 11/06/2026.

The project team recently completed a site visit with AD Morgan, the civil engineer, aquatic designers, and construction subcontractors to evaluate site access and construction feasibility. The proposed construction access appears feasible; however, additional geotechnical investigations and updated survey information are needed to finalize the access roadway design and determine necessary stabilization and retaining wall requirements.

The civil engineer also identified potential parking requirements associated with the additional pool occupancy that will need to be reviewed with Pasco County. The County's permitting process is anticipated to take approximately six months, including a required pre-application meeting.

The aquatic design team provided additional information regarding the proposed AquaRevival regenerative media filtration system. According to the designer's preliminary analysis, the system offers approximately $25,000 in initial construction savings and $173,000 in operational savings over ten years compared to traditional sand filtration. The District is coordinating with its pool maintenance contractor to independently evaluate the system's long-term serviceability and maintenance requirements. Additionally, the aquatic designer will consult with its structural engineer regarding potential alternatives to the proposed pool expansion joint to minimize future maintenance and pool downtime.

Next Steps:

Coordinate updated survey and geotechnical investigations with AVCON.
Evaluate construction access, parking requirements, and permitting considerations.
Obtain filtration system documentation and feedback from the District's pool maintenance contractor.
Evaluate structural alternatives to the proposed pool expansion joint.
Coordinate the required Pasco County pre-application meeting.

Gate at Wrencrest Drive:

Garrett Engineering Group is currently working to provide the signage and striping plan for the updated design plan. BDi has coordinated providing Garrett with all of the existing documents and CAD files they need to produce the plan.

Dog Park Development:

The proposed dog park fencing has been approved, and the County has approved a pervious geoweb-grid system for parking. We have sent the conceptual design to the County engineers to get feedback on if any of the included details of the plan would need to be updated or if we can simplify the plan at all to value engineer the project based on the materials, they are asking that we use.

Tab 3

MPII ARCHITECTURE REVIEW APPLICATIONS LOG						As of	11.04.2026			
CASE #	**VILLAGE**	**ST. #**	**ST. NAME**	**TYPE OF REQUEST (Brief Description)**	**Scheme #**	**Primary**	**Trim**	**Door**	**Garage Door**	**ARC RECOMMENDATION**
2026-045	Wrencrest	30648	Nickerson Lp	New Roof Installation	Estate Gray					Approve
2026 - 046	Colehaven	30422	Treyburn Lp	Paint Color	78	7045	7006	7062	7045	Approve
2026 - 47	Colehaven	30505	Treyburn Lp	Paint Color	54	6087	6078	*6300 instead of 3020 see samples	6087	Request to change front door from approved Marooned 6020 to Burgundy 6300
2026 - 048	Iverson	1323	Baythorn Dr	Paint Color	2	6142	6126	6335	6142	Approve
2026 - 049	Wrencrest	30841	Wooley Ct	Paint Color	45	6065	6070	6061	6065	Approve

Tab 4

Justin Wright
Operations Manager/Maintenance Report
November 04, 2026

- November Newsletter / attached.
- Maintenance staff continue to clean storm drains and ponds throughout the district to keep the community clean.
- Maintenance staff have continued to clean, repair, and repaint the village walls throughout the district.
- Maintenance staff started to decorate for Christmas.
- Maintenance staff repaired a water leak on the basketball court coming from the drinking fountain.
- OLM November 2026 Landscape Inspection – LMP passed the inspection with a score of 93.5%. The inspection was held on Monday, November 02, 2026.

Board Discussion / Approval

- FHP& PCSO Reports / attached.
- Engineer Report / attached.

Tab 5

Volume 11
Issue 11
November 1, 2026

THE MONTHLY NEWSLETTER FOR RESIDENTS OF THE MPII CDD

MPII NEWS



in this issue

Veterans Day **P. 2**
Holiday Schedule Changes **P. 3**
Hurricane Season Ending **P. 4**
Election Day **P. 6**
Upcoming MPII EPC Events **P. 7**

Meadow Pointe II Clubhouse

30051 County Line Rd
Wesley Chapel, FL
33543
813-991-5016

www.meadowpointe2cdd.org
Facebook.com/MPIICDD

Operations Manager

Justin Wright
justinwright@mpiicdd.org

Office Hours

Daily 8am—8:45pm

Fitness Center

M-F 7am—8:45pm
S/S 8am—8:45pm

Pool


Daily 9am—30 minutes before dusk

Playground

Daily 9am—30 minutes before dusk

Courts

Daily 8am—8:45pm

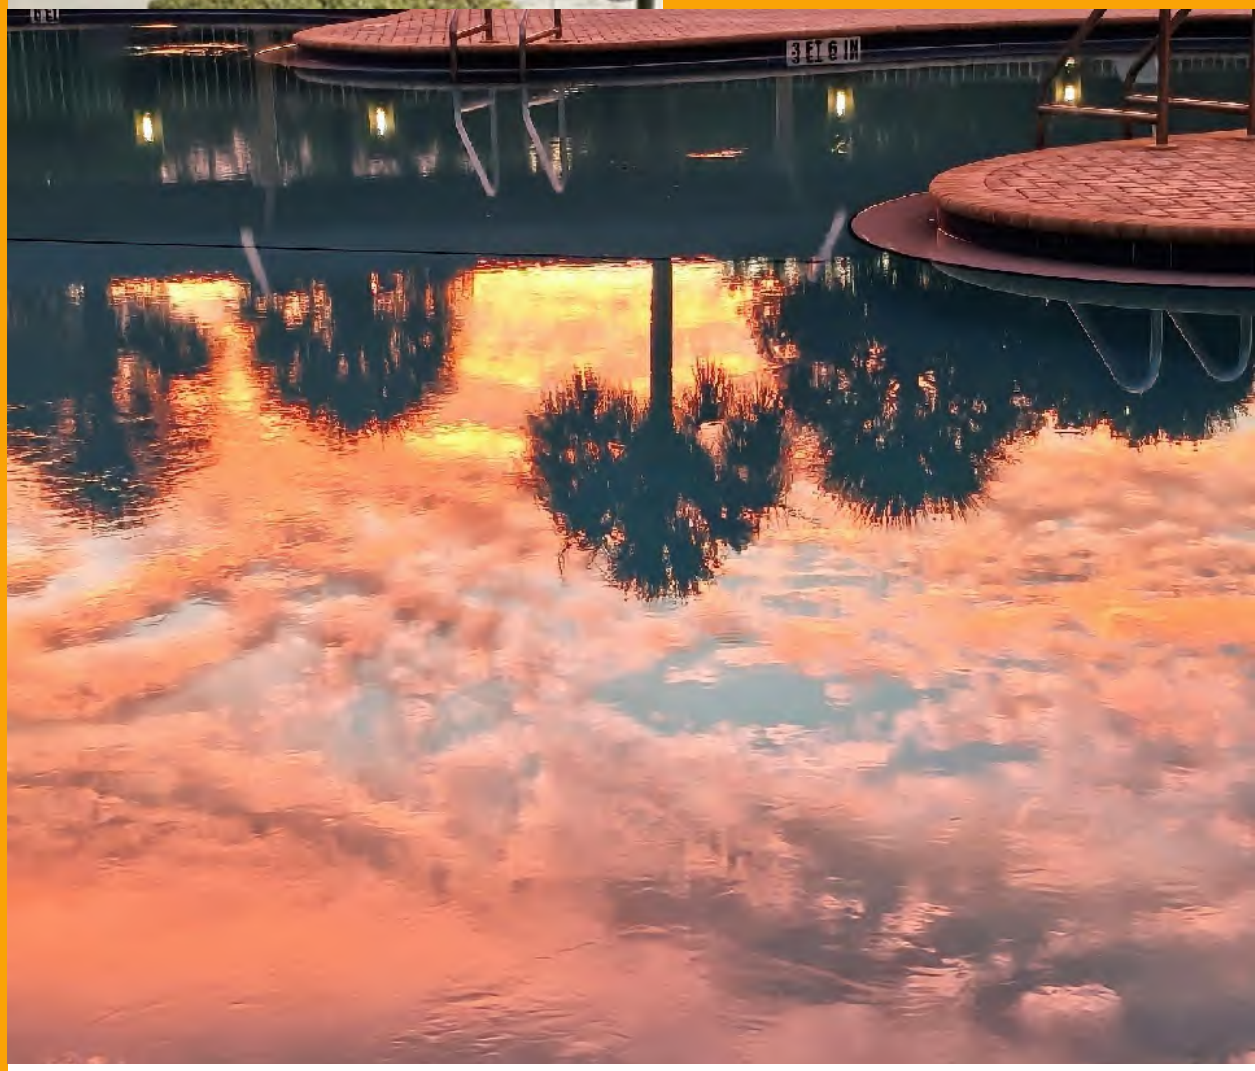

The MPII pool working as a reflecting pool, capturing a stunning orange dawn shadowing the palm trees and a partly clouded sky. A different perspective can often capture stunning beauty. Whenever you're out and about in our community, don't forget to stop and look around once in a while. *Photo courtesy of Sabrina Colby*

MPII CDD Board of Supervisors

John Picarelli
Chairperson
johnpicarelli@mpiicdd.org

Rob Signoretti
Vice Chairperson
robertsignoretti@mpiicdd.org

Jamie Childers
Secretary
jchilders@mpiicdd.org

Chris Kluender
Secretary
chriskluender@mpiicdd.org

Kyle Molder
Secretary
kyle.molder@mpiicdd.org


The CDD Board of Supervisors holds public meetings twice each month. These are held on the 1st and 3rd Wednesdays at 6:30 pm in the Clubhouse.

All MPII residents are welcomed and encouraged to attend. This is your CDD and attending meetings is the best way to stay informed and share your input.

Veterans Day

Veterans Day occurs this month on the 11th. It's an opportunity for our community to honor the brave men and women who have served in the United States Armed Forces. Whether on the front lines or behind the scenes, these individuals have played a vital role in preserving the freedoms we enjoy every day.

Veterans Day began as Armistice Day, commemorating the end of World War I, which officially concluded with the armistice signed on November 11, 1918. Originally, it was a day to honor the veterans of that war, but after World War II and the Korean War, Congress amended the holiday in 1954. At the urging of veteran organizations, the name was changed to Veterans Day, expanding the recognition to all U.S. military veterans, past and present.

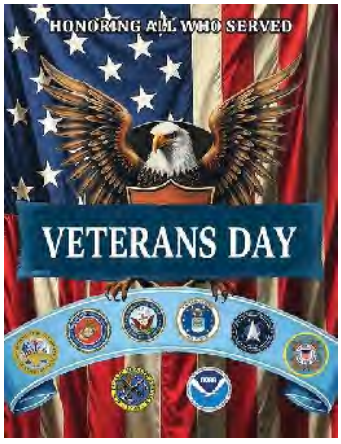

It is important to note that Veterans Day is not Memorial Day. While Memorial Day honors those who have fallen in military service, Veterans Day celebrates all who have served — living or deceased — with special appreciation for those still among us today.

While Veterans Day is marked by ceremonies, parades, and moments of silence, honoring veterans should extend beyond just one day. Many veterans return home facing challenges — from physical injuries and PTSD to difficulty finding employment or accessing healthcare.

Here are some meaningful ways we can support veterans right here in our community:

- Volunteer Your Time
  Local organizations like the *American Legion*, *Veterans of Foreign Wars (VFW)*, and *Homes for Our Troops* often welcome volunteers. Whether it's helping with events, transportation, or home repairs, small efforts make a big difference.
- Support Veteran-Owned Businesses
  Choose to shop or hire locally where your money directly supports veterans who are building a life after service.
- Donate to Local Services
  Consider donating to food banks, shelters, or programs like the *Wounded Warrior Project*, *DAV (Disabled American Veterans)*, or your local VA center.
- Reach Out
  Sometimes the best way to support a veteran is simply by listening. A friendly conversation or an expression of gratitude can go a long way.

On behalf of our entire community, we extend our deepest thanks to all who have worn the uniform. Your courage, commitment, and sacrifice do not go unnoticed. Let us come together — not just in ceremony, but in action — to ensure every veteran feels supported and valued, today and every day. If you are a veteran and find yourself in need of help, call the Veterans Crisis Line by dialing 988 (then select 1), or text 838255, or start an online chat at VeteransCrisisLine.net/Chat, and TTY users can dial 711 (then 988).

Holiday Schedule Changes

As shocking as this may be to many of us, with Halloween behind us and the calendar's turn to November, that means holiday season is upon us! This also means it's time to make everyone aware of how some schedules will change during the next 10 weeks.

Firstly, Daylight Saving Time affects some schedules at the Clubhouse. Due to local laws, we will continue closing the pool, splash pad, and playground 30 minutes before dusk. Please bear in mind, due to the time change combined with shorter periods of daylight due to seasonal shifts, beginning on November 1st, these closures will still occur earlier than previously, near 5 pm. .

Additionally, the only three days of the year when the Clubhouse is closed are all approaching as part of holiday season (Thanksgiving Day, Christmas Day, and New Year's Day). So, on Wednesday, 11/25 the Clubhouse (all buildings) will close at noon, and we will reopen at normal hours on Friday, 11/27. Similarly, next month the Clubhouse will close at noon on Thursday 12/24 and will reopen at normal hours on Saturday 12/26. One week later we will close at noon on Thursday 12/31 and will reopen at normal hours on Saturday 1/2/27. During these closures, the playground and courts will still be open, though no staff will be available on site.

Also notably, Coastal Waste and Recycling also closes on those same three days. Many MPII villages are part of the Coastal contract – if your village is not part of the Coastal pickups, please consult with your HOA for any holiday changes for your trash service. Due to these closures, we will miss two upcoming pickup days. So, their Friday pickup for 11/27 will not happen, residents will have to hold their trash until the Tuesday, 12/1 pickup. Similarly, next month, the Friday pickups for 12/25 and 1/1/27 will be canceled due to the holidays. Those two weeks there will ONLY be pickups on Tuesdays. The normal twice-weekly pickups will resume on Tuesday, 1/5/27. Remember, Coastal is available to answer questions and can be reached at 727-561-0360 or largocs@coastalwasteinc.com.

November MPII Trivia

Trivia – The event that inspired the Thanksgiving holiday was a harvest feast shared between the Pilgrims of Plymouth Colony and what Native American tribe?

Answer on page 6.

MPII Management Company

Inframark
Lee Griffius
Lee.Griffius@inframark.com
352-728-2186

CDD fee/Bond Questions

Inframark Accounting Department
assessments@inframark.com

The MPII Clubhouse offers MPII residents Notary Services at no cost.

We have a certified Notary on staff, please call ahead for availability.

Hurricane Season Update

The 2026 hurricane season is ending at the end of November. So far, and for the second year in a row, we have been very fortunate. This season, the effects of El Niño seem to have all but eliminated the ability of any systems to form in the Atlantic.



We should not assume that we will escape this season without a storm however. Stay vigilant, we saw in October a system form in the Gulf. So, until we are into December, keep an eye and ear on the weather reports, and make sure your supplies and plans are in place.

Hopefully we will get through the season without a significant storm in our area. Once we are through the season, it might be a good idea to go through your supply kits and make sure they're in good shape. It may also be wise to use or consume any perishable items that are part of your hurricane supplies and replace them before next season. Even bottled water should not be kept from season to season. While water itself doesn't expire, the plastic bottles can start to break down over time, especially if stored in warm or hot areas.

Hopefully we finish off the 2026 hurricane season without a storm, but let's make sure that MPII is prepared through the home stretch just in case. Stay safe out there MPII.

November is National Native American Heritage Month





Florida's history is inextricably linked with the good, the bad, and the ugly history of the interactions between early American settlers and the indigenous peoples. Florida remains home to over a dozen tribes and countless locations rich in that history. One location near us is Oelsner Mound (near 4930 Sunset Blvd., Port Richey). Sadly, the Temple Mound is all that remains from the late Weeden Island period. A nearby burial mound was destroyed by developers in the 50's. You can still visit the Temple Mound, which is protected by the National Register of Historic Places.

- https://www.hmdb.org/m.asp?m=67070
- https://www.diamondlegacyamerica.org/mound-village-port-richey-florida?v3=true

November Holidays



November 1st – Daylight Saving Time Ends. At 2am on Sunday, November 1st (or on Halloween - Saturday night before bed for most people), clocks need to be set back one hour as we return to Eastern Standard Time. Don't forget watches and car clocks! Hopefully everyone enjoys the extra hour of sleep!



November 1st – All Saints' Day/ All Souls' Day. Many Christians celebrate all of the Saints on November 1st, and on the 2nd, they commemorate the faithful that have departed. To all the Christians who celebrate these holidays: Have a Blessed All Saints' Day and All Souls' Day!



8th – Diwali. Today is Diwali – the Hindu Festival of Lights. It is celebrated by Hindus, Jains, Sikhs, and some Buddhists. Using light as a metaphor for knowledge and consciousness, the festival celebrates the victory of light over dark, good over evil, and knowledge over ignorance. To all those that celebrate, have a very Happy Diwali!



November 11th – Veterans Day. While WWI wouldn't officially end until June 28, 1919, the fighting ceased with an armistice on the 11th hour of the 11th day of the 11th month of 1918. One year later, Armistice Day was commemorated. In 1954, the U.S. Congress and President Dwight Eisenhower changed it to Veterans Day – a day to celebrate and honor all American veterans. MPII wishes to honor and thank all our residents that are Veterans – Happy Veterans Day!



November 26th – Thanksgiving. With its beginnings as a thankful celebration of the harvest, Thanksgiving is now a favorite holiday of many Americans. With ties to family, friends, shared meals, and as the unofficial kickoff to the holiday season, all Americans generally enjoy Thanksgiving. MPII hopes all our residents, their families, and their friends have a very Happy Thanksgiving.



November 29th – Advent (start). Advent is the season leading up to Christmas. Many Christians celebrate the entire Advent season culminating with the Nativity of Jesus. For those that celebrate: Have a blessed Advent!

Election Day

At the very start of November, on Tuesday the 3rd, it will be Election Day. This year's November General Election, though not a Presidential election, is a critical mid-term election and it includes various critically important local elections. More information is available at www.pascovotes.gov.



For all MPII residents, unless your primary residence is elsewhere, the MPII Clubhouse is your polling location. As such, the Clubhouse office and event rooms will be closed for the day. The pool, fitness center, and courts will be open however. Please expect increased traffic – vehicle and pedestrian – in the vicinity of the Clubhouse all day. Please be safe when driving or walking in the area.

All MPII residents who are registered to vote are highly encouraged to do so. Please look at the www.pascovotes.gov website ahead of time to see the various offices and candidates and do your research to make your choices. Please be kind and patient with the poll workers as well as all your fellow voters and community members. Let's have great voter turnout in MPII!

Trivia Answer (from page 3): The Wampanoag People!

The Wampanoag people are native to the northeastern woods, in land now known as Massachusetts and Rhode Island. The legacy of the 'first Thanksgiving' is darker and more complex than many of us understand. But the idea of coming together, sharing a big meal at the harvest, and strengthening family ties and friendships is a noble and romantic idea we can all aim to emulate.



- https://nativeamericantribes.info/wampanoag-tribe-thanksgiving-history/?v3=true
- https://www.smithsonianmag.com/blogs/national-museum-american-indian/2017/11/23/everyones-history-matters-and-wampanoag-indian-thanksgiving-story-deserves-be-known/?v3=true



Upcoming MPII EPC Events

Last month the EPC thrilled countless people with the annual Halloween Festival! The costume parade was a delightful treat for the kids and all the adults watching. The haunted maze thrilled and scared lots of people, but the second – much less scary maze – was also popular, especially with the little ones. The kids all got goodie bags, and many of them participated in various activities and enjoyed free popcorn, cotton candy, and sno-cones. We had vendors and live music from Marcus Smith as well. All in all, a great time for the adults and the kids! The EPC and the entire MPII community owe a HUGE THANK YOU to all the volunteers who made that event come to life!



The next event from the EPC isn't far off, as Breakfast with Santa is slated for Saturday, December 5th! Set aside that morning for pancakes, photos with the big guy, holiday themed activities, and more! Watch for details on our Facebook page!

If you are interested in volunteering for the Breakfast with Santa event, or future EPC events, please email epc@mpiicdd.org to let us know!






MPII Clubs & Opportunities

TEACH LEAF is enrolling for the 2026-2027 school year! The Kindergarten Learning Pod will meet on Mondays and Wednesdays and the Emerging Readers Pod will meet on Tuesdays. This is a great opportunity for the Homeschool families in our community! For more details or to enroll in the Pod, please contact Melissa Goebel at teacher.melissa827@gmail.com.

If you or your business offer classes, clubs, or activities that are open to all MPII residents and they take place at our Clubhouse (whether free or fee based), email newsletter@mpiicdd.org to be listed in our newsletter.

MPII NEWS

Meadow Pointe II CDD
30051 County Line Road
Wesley Chapel, FL 33543
813-991-5016
www.facebook.com/MPIICDD
newsletter@mpiicdd.org

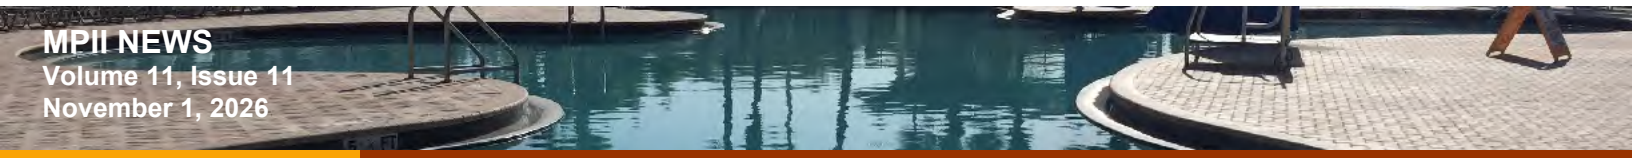

MPII NEWS
Volume 11, Issue 11
November 1, 2026



MPII News Needs Your Photos!

If you have taken a photo within MPII that you think would make a nice cover shot on a future issue, please email it to newsletter@mpiicdd.org. Submitting a photo gives us permission to use it in the newsletter. If there are people in the photo, please ensure that we have their permission to publish their photo.

Also, remember that the Clubhouse has an opt-in email list for receiving a link to the newsletter PDF each month! This is the MAIN way to receive our community newsletter. To opt-in, just email newsletter@mpiicdd.org and tell us what email address or addresses you'd like us to include. As of now, the Clubhouse only uses this list for the newsletter, but we may include other time-sensitive announcements in the future.

Tab 6

YTD FHP Off Duty Activity Report

YTD as of 1/1/26	SPEED WARNINGS	SPEED CITATIONS	ARRESTS	STOP SIGN	SEAT BELT	OTHER	STREET PARKING
6/29/2026	307	74	0	5	6	159	0
10/29/2026	245	20	2	1	8	122	0

FHP OFF DUTY ACTIVITY REPORT

DATE	SHIFT	SPEED WARNINGS	SPEED CITATIONS	ARRESTS	STOP SIGN	SEAT BELT	OTHER
10/1/2026	2pm-6pm	5	1	0	0	0	2
10/7/2026	2pm-6pm	7	0	0	0	0	5 Stopping in roadway dropping kids off on mandsfield; 2 ins; 1 tint; 1 DL vio
10/13/2026	4am-8am	9	1	0	0	0	6 1 driving w/o headlights; 1 failure to yield to right of way; 4 ins
10/14/2026	4pm-8pm	10	1	0	0	0	5 1 failure to yield to emergency vehicle; 1 DL vio; 3 ins
10/15/2026	4am-8am	8	0	0	0	0	2 1 DL; 1 ins
10/19/2026	4am-8am	6	2	0	0	0	3 2 tag/reg vios; 1 ins
10/21/2026	12pm-4pm	11	0	0	0	0	5 1 tag/reg; 2 ins; 1 improper turn ; 1 window tint
10/29/2026	4am-8am	5	0	0	0	0	2 1 DL; 1 Insurance

PCSO EXTRA DUTY MONTHLY ACTIVITY REPORT

DATE	SHIFT	STREET PARKING VIOLATIONS	RADAR RUNNING TIME	OTHER	DEPUTY					
5-Oct	6AM-12PM			Conducted a patrol of the neighborhood. Patrolled several more of the neighborhoods throughout the shift, where I did not observe any suspicious persons/activity. Assisted with school traffic by having law enforcement presence. Conducted illegal parking	VANCE					
9-Oct	12-6pm	3 warnings	360 minutes	Majority of time spent running radar at various locations throughout the community as requested. Conducted a traffic stop on a vehicle and issued a speeding ticket. Rest of the traffic was within 7mph of the posted speed limit. Monitored the school zone to ensure there were no speeders or illegal parking issues on Wrencrest as requested. There were no major incidents that occurred during this shift	FITTS					
13-Oct	6AM-12PM	2 warnings	3 hours	Patrolled community, observed 2 illegally parked vehicles on Emmetts ct - issued written warnings. Patrolled Mansfield, used stationary laser captured 2 speeders, issued written warnings. Continued patrolling, found 6 vehicles that did not stop at the stop sign at Wrencrest/Nickerson - issued written warnings	GUTIERREZ					
17-Oct	4-10pm		5 hours	Upon arrival I remained visible in the community by conducting traffic stops and driving around the community. 2 traffic citations and 2 traffic warnings	REYES					

19-Oct	6pm-12am	3 verbal parking warnings 11 written parking warnings	3 hours	From 1800-1900 hours, ran radar on Mansfield; from 1900-0000 provided a roaming patrol throughout the community, ran radar from time to time and made 4 traffic stops	BLANCO					
23-Oct	4-10pm			Conducted mutiple patrols within the neighborhood. I utilized my steady blue and red lights to increase law enforcement presence. Parked in various places within the neighborhood to increase law enforcement presence. Frequently chacked clubhouses, playground and sports area to ensure no one is trespassing. There was a large presence of juveniles during the early morning being picked up from buses, I masde sure everyone was following traffic rules and to make sure the juveniles were safe. Nothing suspicious was seen.	NGUYEN					
26-Oct	6AM-12PM	3 written warnings 1 verbal warning	2 hours	I drove throughout the community and observed 4 vehicles parked on the side of the road which were impeding the flow of traffic. I then positioned my patrol vehicle throughout Mansfield Blvd to deter speeders. While using my stationary laser, I captured 2 vehicles speeding on CLR,both drivers were given written warnings. I then patrolled Wrencrest; I positioned my vehicle towards the stop sign located near Nickerson Lp & Wrencrest Dr. I observed 5 vehicles failing to stop at the stop sign. No previous history on these drivers, issued written warnings. I continued to patrol the neighborhoods and did not observe any	GUTIERREZ					

28-Oct	**4pm-8pm**	**6 written warnings**		**While on this detail I conducted 6 written illegal parking warnings, 1 citizen assist and a welfare check, patrolled the community with my cruise lights on and active to make citizens aware of my presence**	**BLACKWELL**					